



SLOVENSKI STANDARD

SIST ISO 22514-4:2017

01-maj-2017

Nadomešča:

SIST-TP ISO/TR 22514-4:2010

**Statistične metode za obvladovanje procesov - Zmogljivost in delovanje - 4. del:
Ocene zmogljivosti procesov in merila za delovanje**

Statistical methods in process management - Capability and performance - Part 4:
Process capability estimates and performance measures

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Méthodes statistiques dans la gestion de processus - Aptitude et performance - Partie 4:
Estimations de l'aptitude de processus et mesures de performance

<https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017>

Ta slovenski standard je istoveten z: ISO 22514-4:2016

ICS:

03.120.30 Uporaba statističnih metod Application of statistical
methods

SIST ISO 22514-4:2017

en,fr

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 22514-4:2017](https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017)

<https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017>

INTERNATIONAL
STANDARD

ISO
22514-4

First edition
2016-08-01

**Statistical methods in process
management — Capability and
performance —**

Part 4:
**Process capability estimates and
performance measures**

iTeh STANDARD PREVIEW

(standards.iteh.ai)
*Méthodes statistiques dans la gestion de processus — Aptitude et
performance —*

*Partie 4: Estimations de l'aptitude de processus et mesures de
performance*

<https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017>



Reference number
ISO 22514-4:2016(E)

© ISO 2016

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 22514-4:2017](https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017)

<https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	v
Introduction	vi
1 Scope	1
2 Symbols and abbreviated terms	1
2.1 Symbols.....	1
2.2 Abbreviated terms.....	3
3 Basic concepts used for process capability and performance	3
3.1 General.....	3
3.2 Location.....	3
3.3 Dispersion.....	3
3.3.1 Inherent dispersion.....	3
3.3.2 Total dispersion.....	3
3.3.3 Short-term dispersion.....	3
3.4 Mean square error (MSE).....	4
3.5 Reference limits.....	4
3.6 Reference interval (also known as process spread).....	4
4 Capability	4
4.1 General.....	4
4.2 Process capability.....	6
4.2.1 Normal distribution.....	6
4.2.2 Non-normal distribution.....	7
4.3 Process location.....	7
4.4 Process capability indices for measured data.....	8
4.4.1 General.....	8
4.4.2 C_p index (for the normal distribution).....	9
4.4.3 C_{pk} index (for the normal distribution).....	10
4.4.4 C_{pk} index for unilateral tolerances.....	10
4.5 Process capability indices for measured data (non-normal).....	10
4.5.1 General.....	10
4.5.2 Probability paper method.....	11
4.5.3 Pearson curves method.....	11
4.5.4 Distribution identification method.....	12
4.6 Alternative method for describing and calculating process capability estimates.....	12
4.7 Other capability measures for continuous data.....	13
4.7.1 Process capability fraction (PCF).....	13
4.7.2 Indices when the specification limit is one-sided or no specification limit is given.....	13
4.8 Assessment of proportion out-of-specification (normal distribution).....	15
5 Performance	16
5.1 General.....	16
5.2 Process performance indices for measured data (normal distribution).....	16
5.2.1 P_p index.....	16
5.2.2 P_{pk} index.....	17
5.3 Process performance indices for measured data (non-normal distribution).....	17
5.3.1 General.....	17
5.3.2 Probability paper method.....	17
5.3.3 Pearson curves method.....	18
5.3.4 Distribution identification method.....	18
5.4 Other performance indices for measured data.....	18
5.5 Assessment of proportion out-of-specification for a normal distribution of the total distribution.....	18
6 Reporting process capability and performance indices	19

ISO 22514-4:2016(E)

Annex A (informative) Estimating standard deviations	21
Annex B (informative) Estimating capability and performance measures using Pearson curves — Procedure and example	23
Annex C (informative) Distribution identification	37
Annex D (informative) Confidence intervals	42
Bibliography	44

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 22514-4:2017](https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017)

<https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#).

The committee responsible for this document is Technical Committee ISO/TC 69, *Applications of statistical methods*, Subcommittee SC 4, *Applications of statistical methods in process management*.

This first edition of ISO 22514-4 cancels and replaces ISO/TR 22514-4:2007, which has been technically revised.

ISO 22514 consists of the following parts, under the general title *Statistical methods in process management — Capability and performance*:

- Part 1: *General principles and concepts*
- Part 2: *Process capability and performance of time-dependent process models*
- Part 3: *Machine performance studies for measured data on discrete parts*
- Part 4: *Process capability estimates and performance measures*
- Part 5: *Process capability estimates and performance for attributive characteristics*
- Part 6: *Process capability statistics for characteristics following a multivariate normal distribution*
- Part 7: *Capability of measurement processes*
- Part 8: *Machine performance of a multi-state production process*

ISO 22514-4:2016(E)

Introduction

Many organizations have embarked upon a continuous improvement strategy. To comply with such a strategy, any organization will need to evaluate the capability and performance of its key processes. The methods described in this part of ISO 22514 are intended to assist any management in this respect. These evaluations need to be constantly reviewed by the management so that actions compatible with continuous improvement can be taken when required.

The content of this part of ISO 22514 has been subject to large shifts of opinion during recent times. The most fundamental shift has been to philosophically separate what is named in this part of ISO 22514 as capability conditions from performance conditions, the primary difference being whether statistical stability has been obtained (capability) or not (performance). This naturally leads onto the two sets of indices that are to be found in their relevant clauses. It has become necessary to draw a firm distinction between these since it has been observed in the industry that companies have been deceived about their true capability position due to inappropriate indices being calculated and published.

The progression of this part of ISO 22514 is from the general condition to the specific and this approach leads to general formulae being presented before their more usual, but specific manifestations.

There exist numerous references that describe the importance of understanding the processes at work within any organization, be it a manufacturing process or an information handling process. As organizations compete for sales with each other, it has become increasingly apparent that it is not only the price paid for a product or service that matters so much, but also what costs will be incurred by the purchaser from using such a product or service. The objective for any supplier is to continually reduce variability and not to just satisfy specification.

Continual improvement leads to reductions in the costs of failure and assists in the drive for survival in an increasingly more competitive world. There will also be savings in appraisal costs for as variation is reduced, the need to inspect product might disappear or the frequency of sampling might be reduced.

Process capability and performance evaluations are necessary to enable organizations to assess the capability and performance of their suppliers. Those organizations will find the indices contained within this part of ISO 22514 useful in this endeavour.

Quantifying the variation present within a process enables judgement of its suitability and ability to meet some given requirement. The following paragraphs and clauses provide an outline of the philosophy required to be understood to determine the capability or performance of any process.

All processes will be subject to certain inherent variability. This part of ISO 22514 does not attempt to explain what is meant by inherent variation, why it exists, where it comes from nor how it affects a process. This part of ISO 22514 starts from the premise that it exists and is stable.

Process owners should endeavour to understand the sources of variation in their processes. Methods such as flowcharting the process and identifying the inputs and outputs from a process assist in identification of these variations together with the appropriate use of cause and effect (fishbone) diagrams.

It is important for the user of this part of ISO 22514 to appreciate that variations exist that will be of a short-term nature, as well as those that will be of a long-term nature and that capability determinations using only the short-term variation might be greatly different to those which have used the long-term variability.

When considering short-term variation, a study that uses only the shortest-term variation, sometimes known as a machine study and described in ISO 22514-3, might be carried out. The method required to carry out such a study will be outside the scope of this part of ISO 22514; however, it should be noted that such studies are important and useful.

It should be noted that where the capability indices given in this part of ISO 22514 are computed, they only form point estimates of their true values. It is therefore recommended that, wherever possible, the

indices' confidence intervals are computed and reported. This part of ISO 22514 describes methods by which these can be computed.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 22514-4:2017

<https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 22514-4:2017](https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017)

<https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017>

Statistical methods in process management — Capability and performance —

Part 4: Process capability estimates and performance measures

1 Scope

This part of ISO 22514 describes process capability and performance measures that are commonly used.

2 Symbols and abbreviated terms

2.1 Symbols

In addition to the symbols listed below, some symbols are defined where they are used within the text.

α	fraction or proportion
β	shape parameter in a Weibull distribution
β_2	coefficient of kurtosis
c_4	constant based on subgroup size, n (see ISO 7870-2)
C_p	process capability index
C_{pk}	minimum process capability index
C_{pk_L}	lower process capability index
C_{pk_U}	upper process capability index
C_{pm}	alternative process capability index
C_R	process capability fraction (PCF)
d_2	constant based on subgroup size, n (see ISO 7870-2)
e	Eulers's number (approximately 2,718), mathematical constant
Φ	distribution function of the standard normal distribution
γ	location parameter in a Weibull distribution
γ_1	coefficient of skewness
m	number of subgroups
K_l, K_u	multipliers for estimating the confidence limits for a process capability index
L	lower specification limit

ISO 22514-4:2016(E)

$P_{0,135\%}$	lower 0,135 % percentile
μ	location of the process; population mean value
N	total sample size
n	number of values or subgroup size (for a control chart)
$P_{\alpha\%}$	α percentile
p_L	lower fraction nonconforming
P_p	process performance index
P_{pk}	minimum process performance index
P_{pk_L}	lower process performance index
P_{pk_U}	upper process performance index
p_t	total fraction nonconforming
p_U	upper fraction nonconforming
$P_{99,865\%}$	upper 99,865 % percentile
π	geometric constant
Q_k	process variation index
θ	parameter required for the Rayleigh distribution
\bar{R}	average subgroup range
S	standard deviation, sample statistic
S_t	standard deviation, with the subscript 't' indicating total
\bar{S}	average sample standard deviation
S_j	observed sample standard deviation of the j^{th} subgroup
σ	standard deviation, population
$\hat{\sigma}_t$	estimated standard deviation, total
T	target value
U	upper specification limit
$X_{\alpha\%}$	α % percentile
X_i	i^{th} value in a sample
\bar{X}	arithmetic mean value, sample
$\bar{\bar{X}}$	arithmetic mean, of a number of sample arithmetic means

iTech STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 22514-4:2017
<https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017>

ξ	scale parameter in a Weibull distribution
Y_1, Y_2	values read from a graph
z_α	quantile of the standardized normal distribution from $-\infty$ to α

2.2 Abbreviated terms

MSE	mean square error
PCF	process capability fraction
PCI	process capability index

3 Basic concepts used for process capability and performance

3.1 General

The measures referred to in [4.2](#) to [4.6](#) refer only to measured data. They are unsuitable for count or attributes data and information concerning the expression of measures for such data will be found in ISO 22514-5.

3.2 Location

The characterization of location is the mean, μ , or the median, X_{50} %. Although for symmetric distributions the mean is the most natural selection, with non-symmetric distributions the median is the preferred selection.

iTeh STANDARD PREVIEW

(standards.iteh.ai)

SIST ISO 22514-4:2017

3.3 Dispersion

<https://standards.iteh.ai/catalog/standards/sist/02b652b7-208f-4648-8613-f66507183e32/sist-iso-22514-4-2017>

3.3.1 Inherent dispersion

The preferred selection to quantify inherent dispersion is the standard deviation σ . This is often estimated from the mean range value, \bar{R} , taken from a range (R) chart or \bar{S} from a standard deviation (S) chart when the process is stable and in a state of statistical control as indicated in [4.1](#). Methods used to estimate the process standard deviation are given in [Annex A](#).

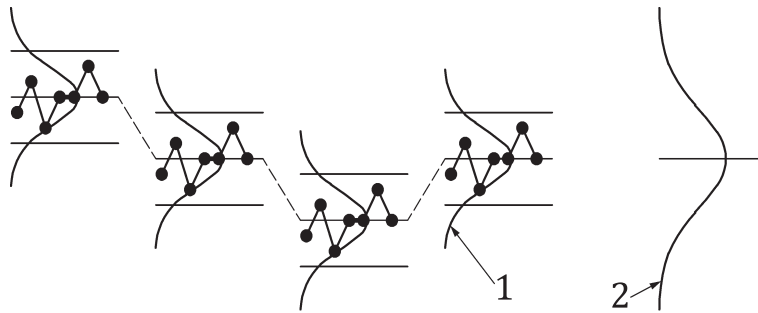
3.3.2 Total dispersion

It is necessary to differentiate between a standard deviation that measures only short-term variation and that which measures longer-term variation. The total dispersion is the dispersion that is inherent in the long-term variation. Methods of calculating the standard deviations representing these variations are given in [Annex A](#). Very often, when data are gathered over a long period of time, the standard deviation is made larger by the effects of fluctuations in the process, σ_t .

3.3.3 Short-term dispersion

A process may have a short-term dispersion effect that is a part of the total dispersion. [Figure 1](#) illustrates this. The short-term dispersion includes the inherent dispersion and can also include some short-term instability effect.

ISO 22514-4:2016(E)

**Key**

- 1 short-term dispersion
- 2 overall dispersion

Figure 1 — Short-term dispersion and its relationship to the total dispersion

The total dispersion can be any shape and not necessarily normal as illustrated here.

3.4 Mean square error (MSE)

When minimizing variation, some practitioners use the mean square error as the preferred measure. It is compatible with the methods used in off-line quality techniques.

3.5 Reference limits

The lower and upper reference limits are respectively defined as the 0,135 % and the 99,865 % percentiles of the distribution that describe the output of the process characteristic. They are written as $X_{0,135\%}$ and $X_{99,865\%}$.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

3.6 Reference interval (also known as process spread)

The reference interval is the interval between the upper and the lower reference limits. The reference interval includes 99,73 % of the individuals in the population from a process that is in a state of statistical control.

4 Capability

4.1 General

Process capability is a measure of inherent process variability. The variability that is inherent in a process when operating in a state of statistical control is known as the inherent process variability. It represents the variation that remains after all known removable *assignable causes* have been eliminated. If the process is monitored using a control chart, the control chart will show an *in control* state.

Capability is often regarded as being related to the proportion of output that will occur within the product specification tolerances. Since a process in statistical control should be described by a predictable distribution, the proportion of out-of-specification outputs can be estimated. As long as the process remains in statistical control, it will continue to produce the same proportion out-of-specification.

Management actions to reduce the variation from *random causes* are required to improve the process' ability to consistently meet the specification requirements.

In short, the following will be necessary:

- define the process and its operating conditions. If there is a change to those conditions, it will necessitate a new process study;
- assess the short-term and long-term measurement variabilities as percentages of the total variability and minimize them;
- preserve the process stability and maintain its statistical control;
- estimate the remaining inherent variation;
- select an appropriate measure of capability.

The following are the conditions that will apply for capability:

- all technical conditions, e.g. temperature and humidity, shall be clearly stated;
- the uncertainty of the measurement system shall be estimated and judged appropriate (see ISO 22514-7);
- multi-factor, multi-level aspects of the process should be allowed;
- the duration over which the data has been gathered shall be recorded;
- the frequency of sampling and sample size shall be specified and the start and finish dates of data collection;
- the process shall be controlled with a control chart;
- the process shall be in a state of statistical control.

It is necessary to check the control chart from which the data have been taken for statistical control and to examine a histogram of the data with any specification limits superimposed upon it. A valid test for normality should be used in assessing the data such as the Anderson-Darling test^[15] or any other suitable method. This test is powerful in detecting departures from normality in the tails of the distribution and is suggested here as this is the region of interest for capability and performance indices. Additionally, a normal probability plot can be used to look for the following:

- a) verification of normality;
- b) outliers;
- c) data beyond any specification limit;
- d) whether the data are well inside the specification limit(s);
- e) evidence of asymmetry (i.e. skewness);
- f) evidence of “long tails” in the data (i.e. kurtosis);
- g) off-centre distribution;
- h) any unusual patterns.

Explanations of anomalies should be sought in relation to these mentioned features and appropriate action taken on the data prior to the calculation of any measure. It would be inappropriate to just discard data that do not appear to fit any preconceived pattern. Such departures might be very revealing about the process' behaviour and should be thoroughly investigated.