



SLOVENSKI STANDARD
oSIST prEN 17314:2018
01-december-2018

Vozila za talni transport - Specifikacije in preskusne metode - Sistemi za zadrževanje voznikov razen pasnih varnostnih pasov

Industrial trucks - Specifications and test methods - Operator restraint systems other than lap-type seat belts

Flurförderzeuge - Spezifikationen und Prüfverfahren - Andere Rückhaltesysteme für den Bediener als Beckengurte

Chariots de manutention - Spécifications et méthodes d'essai - Systèmes de retenue de l'opérateur autres que le type ceintures de sécurité ventrales

Ta slovenski standard je istoveten z: prEN 17314

ICS:

53.060	Industrijski tovarnjaki	Industrial trucks
--------	-------------------------	-------------------

oSIST prEN 17314:2018

en,fr,de

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 17314

October 2018

ICS 53.060

English Version

Industrial trucks - Specifications and test methods - Operator restraint systems other than lap-type seat belts

Chariots de manutention - Spécifications et méthodes
d'essai - Systèmes de retenue de l'opérateur autres que
le type ceintures de sécurité ventrales

Flurförderzeuge - Spezifikationen und Prüfverfahren -
Andere Rückhaltesysteme für den Bediener als
Beckengurte

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 150.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents	Page
European foreword.....	3
Introduction	4
1 Scope	5
2 Normative references	5
3 Terms and definitions	6
4 Test set-up	7
4.1 General	7
4.2 Assembly of the restraint system	7
5 Test procedure for ejection risk	8
5.1 General	8
5.2 Test equipment	9
5.2.1 Test shape	9
5.2.2 Evaluation of critical test zone	9
5.3 Test requirements	11
5.3.1 Effectiveness regarding ejection risk	11
5.3.2 Test criterion	11
6 Test procedure to assess robustness of the restraint system	11
6.1 General	11
6.2 Test equipment	12
6.2.1 Circular test plate	12
6.2.2 Test apparatus for pushing or pulling the circular plate	12
6.3 Robustness test procedure	13
6.4 Requirements and test criterion	13
6.5 Acceptance criteria	14
7 Documentation	14
Bibliography	15

European foreword

This document (prEN 17314:2018) has been prepared by Technical Committee CEN/TC 150 “Industrial Trucks - Safety”, the secretariat of which is held by BSI.

This document is currently submitted to the CEN Enquiry.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 17314:2020

<https://standards.iteh.ai/catalog/standards/sist/82c83b2c-aec0-4419-91ef-83396131422c/sist-en-17314-2020>

Introduction

This European Standard is a type C standard as stated in EN ISO 12100:2010. This standard has been prepared as a harmonized standard to provide one means of conforming to the essential safety requirements of the Machinery Directive and associated EFTA regulations.

The extent to which hazards are covered is indicated in the scope of this standard.

Current progress in the technical state of the art is leading to improvements in the safety of restraint systems for industrial truck operators. This standard provides a procedure for verifying the effectiveness and the robustness of restraint systems, other than lap belts, to protect truck operator(s) against the risk of lateral ejection from the protective structure during a lateral tip-over. The procedure can be used as a type test as well as an individual test.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 17314:2020

<https://standards.iteh.ai/catalog/standards/sist/82c83b2c-aec0-4419-91ef-83396131422c/sist-en-17314-2020>

1 Scope

This document specifies the tests for the verification of restraint systems against the risk of lateral ejection for:

- counterbalanced lift trucks with centre control, sit down and non-elevating operator position (see EN ISO 3691-1), with a rated capacity up to and including 10 000 kg, hereafter referred to as trucks;
- tractors as defined in EN 12312-15 (airport ground equipment);
- Burden carrier tractors with a maximum speed of more than 25 km/h with seated operator as defined in EN ISO 3691-6.

Counterbalanced trucks, tractors and burden carriers are named hereafter as trucks.

Note 1 Industrial Tractors as defined in EN ISO 3691-1 do not need a restraint system in general.

This document describes a type test for a specific combination of truck and restraint system.

This standard does not cover:

- the risk due to frontal ejection;
- the monitoring of the protective position of the operator restraint system as defined in EN 16307-1:2013+A1:2015, 4.17;
- the testing of seat belts.

Note 2 The testing of seat belts is covered by ISO 24135-1.

The document is not applicable for the retrofit of trucks with restraint systems.

This document does not give any requirements on the need for a restraint system.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN ISO 3691-1, *Industrial trucks — Safety requirements and verification — Part 1: Self-propelled industrial trucks, other than driverless trucks, variable-reach trucks and burden-carrier trucks (ISO 3691-1)*

EN ISO 3691-6, *Industrial trucks — Safety requirements and verification — Part 6: Burden and personnel carriers (ISO 3691-6)*

EN 16307-1:2013+A1:2015, *Industrial trucks — Safety requirements and verification — Part 1: Supplementary requirements for self-propelled industrial trucks, other than driverless trucks, variable-reach trucks and burden-carrier trucks*

ISO 5053-1, *Industrial trucks — terminology and classification — Part 1: Types of industrial trucks*

EN 12312-15, *Aircraft ground support equipment — Specific requirements — Part 15: Baggage and equipment tractors*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5053-1 and EN ISO 3691-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

operator restraint system

device or system that is permanently installed to keep the operator within the protective structure of the truck

Note 1 to entry: The restraint system can be composed of several parts.

Note 2 to entry: A cabin could be designed to act as a restraint system.

3.2

protective structure

framework, cabin or overhead guard capable of protecting the operator of the truck

3.3

bed-plate

chassis or platform on which the assembly composed of protective structure and restraint system is fixed

3.4

test shape

part of the lateral view of the human shape

Note 1 to entry: Simulates the main body parts involved in the case a lateral tip-over occurs. The dimensions and geometry of the test shape are a simplification of the Hybrid III dummy.

3.5

critical test zone

zone where the operator might be ejected laterally from the protective structure (e.g. from the cabin)

3.6

protective position

position of the restraint system in which the operator is safeguarded against ejection from the truck

Note 1 to entry: For restraint systems equipped with a bolt or lock system (door-bar system, door, etc.), the protective position is when the moving part of the restraint is engaged in the interlocking system mounted on a fixed part of the truck.

Note 2 to entry: For restraint systems without such a lock or bolt system, the protective position is as defined by the manufacturer.

Note 3 to entry: Requirements in respect monitoring of the protective position are defined in EN 16307-1:2013+A1:2015, 4.17.

4 Test set-up

4.1 General

The following preconditions are defined to achieve repeatability and comparability for the verification of the fitness of restraint systems avoiding the risk of lateral ejection of the operator.

The restraint system design shall be verified by:

- a) testing as described in this standard; or
- b) calculations, computer modelling or other equivalent simulation methods.

If a cabin is designed to act as a restraint system, the protective position of the access door(s) shall be monitored or:

- the access door(s) shall be self closing and latching;
- the access door(s) shall not be latched or held back in the open position;
- the truck shall not be operated with the access doors temporarily removed.

Requirements in respect monitoring of the protective position are defined in EN 16307-1:2013+A1:2015, 4.17.

4.2 Assembly of the restraint system

The restraint system shall be mounted according to the specifications of the truck manufacturer and/or the restraint system manufacturer.

The restraint system shall be a new and unused sample. It shall be mounted on the truck (e.g. overhead guard or seat) or on an equivalent structure in terms of geometry, dimensions and materials.

No additional non-standard fittings contributing to the strength of construction shall be used. The assembly shall be secured to the bed-plate so that the members connecting the assembly and the bed-plate do not deflect significantly in relation to the restraint system during the test.

If the restraint system is a system that can be deployed during a tip-over situation (e.g. a flexible structure or net) and is not deployed permanently on the protective structure, the deployed version shall be mounted and tested.

Table 1 — Restraint system attached at the rear of the cabin

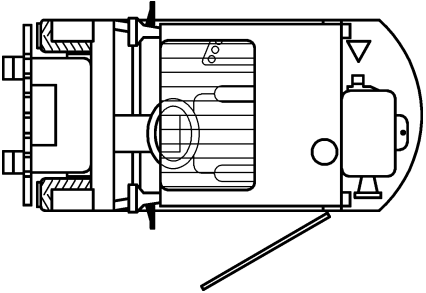
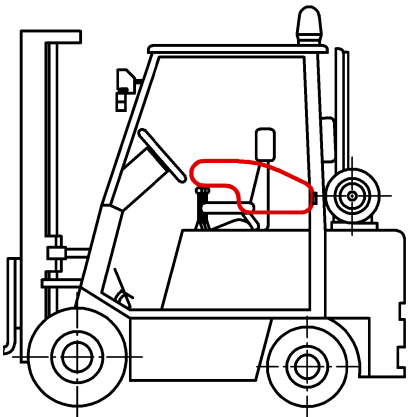
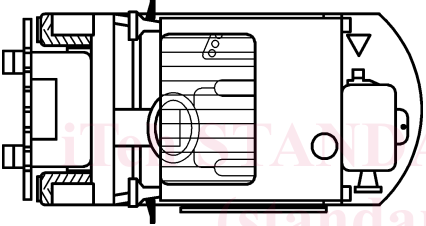
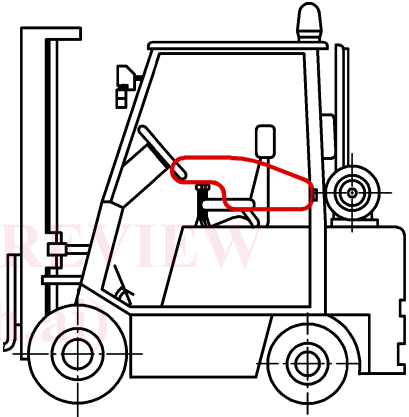
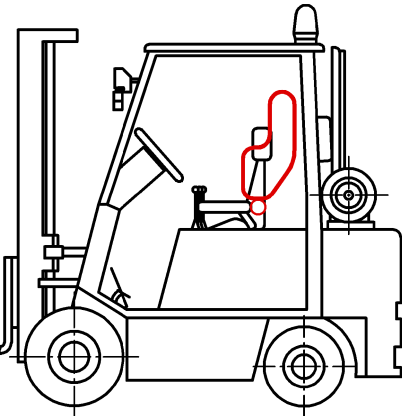
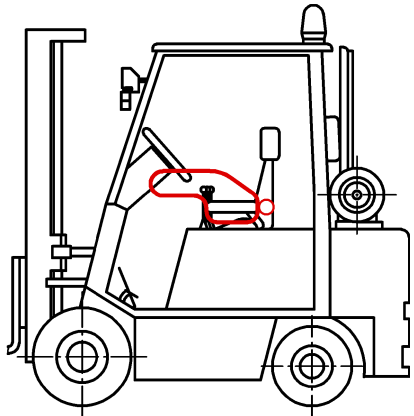
	View from above	Lateral view
Opened position		
Protective position		

Table 2 — Restraint system attached to the seat

	Opened position	Protective position
Lateral view		

5 Test procedure for ejection risk

5.1 General

This test shall only be done if the lateral side of the truck is not fully obstructed by the restraint system or a device that can be deployed (e.g. closed-cab, net, flexible structures).