DRAFT INTERNATIONAL STANDARD ISO/DIS 8673

ISO/TC 2/SC 12 Secretariat: DIN

Voting begins on: Voting terminates on:

2016-03-31 2016-06-29

Hexagon regular nuts (style 1), with fine pitch thread — Product grades A and B

Écrous hexagonaux normaux (style 1) à filetage métrique à pas fin — Grades A et B

ICS: 21.060.20

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/DIS 8673

https://standards.iteh.ai/catalog/standards/sist/c99b8acd-4a59-47d0-800f-178d08054825/iso-dis-8673

ISO/CEN PARALLEL PROCESSING

This draft has been developed within the International Organization for Standardization (ISO), and processed under the **ISO lead** mode of collaboration as defined in the Vienna Agreement.

This draft is hereby submitted to the ISO member bodies and to the CEN member bodies for a parallel three month enquiry.

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.



Reference number ISO/DIS 8673:2016(E)

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/DIS 8673

https://standards.iteh.ai/catalog/standards/sist/c99b8acd-4a59-47d0-800f-178d08054825/iso-dis-8673



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Ch. de Blandonnet 8 • CP 401 CH-1214 Vernier, Geneva, Switzerland Tel. +41 22 749 01 11 Fax +41 22 749 09 47 copyright@iso.org www.iso.org

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document \$180/FC 2. Fasteners, Subcommittee SC 12, Fasteners with metric internal thread. standards.itch.ai/catalog/standards/sist/c99b8acd-4a59-47d0-800f-178d08054825/iso-dis-8673

This fourth edition cancels and replaces the third edition (ISO 8673:2012).

This standard differs from ISO 8673:2012 as follows:

- the Scope has been updated;
- threads M10x1,25 and M20x2 have been moved to preferred threads table;
- non-preferred threads have been completed;
- for steel nuts, quenching and tempering have been specified in accordance with ISO 898-2 as mandatory or optional;
- for steel nuts, the property class 10 has been extended to the whole diameter range;
- the reference to ISO/TR 16224 for nut design has been added;
- for stainless steel nuts, the property classes have been revised in accordance with diameter ranges;
- non-ferrous metal nuts have been deleted as a consequence of withdrawal of ISO 8839.

Hexagon regular nuts (style 1), with fine pitch thread — Product grades A and B

1 Scope

This International Standard specifies the characteristics of hexagon regular nuts (style 1) with fine pitch thread, with nominal diameter from 8 mm through 64 mm, with product grade A for nominal diameters $D \le 16$ mm and product grade B for nominal diameters D > 16 mm.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 225, Fasteners — Bolts, screws, studs and nuts — Symbols and descriptions of dimensions

ISO 262, ISO general purpose metric screw threads — Selected sizes for screws, bolts and nuts

ISO 724, ISO general-purpose metric screw threads — Basic dimensions

ISO 898-2, Mechanical properties of fasteners made of carbon steel and alloy steel — Part 2: Nuts with specified property classes — Coarse pitch thread and fine pitch thread

ISO 965-2, ISO general purpose metric screw threads—Tolerances—Part 2: Limits of sizes for general purpose external and internal screw threads—Medium quality

ISO 3269, Fasteners — Acceptance inspection of 178d08054825/iso-dis-8673

ISO 3506-2, Mechanical properties of corrosion-resistant stainless steel fasteners — Part 2: Nuts

ISO 4042, Fasteners — Electroplated coatings

ISO 4759-1, Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C

ISO 6157-2, Fasteners — Surface discontinuities — Part 2: Nuts

ISO 8992, Fasteners — General requirements for bolts, screws, studs and nuts


ISO 10683, Fasteners — Non-electrolytically applied zinc flake coatings

ISO 16048, Passivation of corrosion-resistant stainless-steel fasteners

3 Dimensions

See Figure 1 and Tables 1 and 2.

Symbols and descriptions of dimensions are specified in ISO 225.

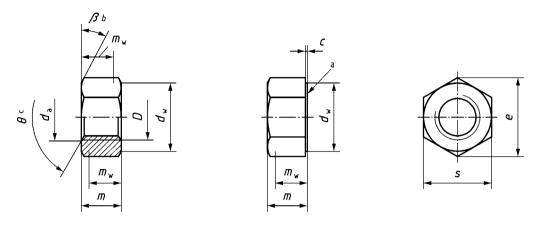

- ^a Unless otherwise specified at the time of order, the nuts are delivered without washer-face.
- b $\beta = 15^{\circ} \text{ to } 30^{\circ}.$
- $\theta = 90^{\circ} \text{ to } 120^{\circ}.$

iTeh STFigure 1 A Dimensions EVIEW

Table 1 Preferred threads

ISO/DIS 8673

Dimensions in millimetres

Thread $(D \times P)$		ps: M8×1 /25s.it	eh.a jvj10.k1 g/sta		8441-6 8 1 9547	d0- M20 ×2	M24×2
С	max.	0,60	0,60	1825/iso-dis-86 0,60	0,80	0,80	0,80
	min.	0,15	0,15	0,15	0,20	0,20	0,20
da	max.	8,75	10,80	13,00	17,30	21,60	25,90
ua	min.	8,00	10,00	12,00	16,00	20,00	24,00
d_{W}	min.	11,63	14,63	16,63	22,49	27,70	33,25
e	min.	14,38	17,77	20,03	26,75	32,95	39,55
	max.	6,80	8,40	10,80	14,80	18,00	21,50
m	min.	6,44	8,04	10,37	14,10	16,90	20,20
$m_{ m W}$	min.	5,15	6,43	8,30	11,28	13,52	16,16
	nom. = max.	13,00	16,00	18,00	24,00	30,00	36,00
s —	min.	12,73	15,73	17,73	23,67	29,16	35,00
Thread $(D \times P)$		M30×2	M36×3	M42×3	M48×3	M56×4	M64×4
_	max.	0,80	0,80	1,00	1,00	1,00	1,00
С	min.	0,20	0,20	0,30	0,30	0,30	0,30
d a	max.	32,40	38,90	45,40	51,80	60,50	69,10
	min.	30,00	36,00	42,00	48,00	56,00	64,00
dw	min.	42,75	51,11	59,95	69,45	78,66	88,16
е	min.	50,85	60,79	71,30	82,60	93,56	104,86
m	max.	25,60	31,00	34,00	38,00	45,00	51,00

	min.	24,30	29,40	32,40	36,40	43,40	49,10
mw	min.	19,44	23,52	25,92	29,12	34,72	39,28
s -	nom. = max.	46,00	55,00	65,00	75,00	85,00	95,00
	min.	45,00	53,80	63,10	73,10	82,80	92,80

 ${\bf Table~2-Non\text{-}preferred~threads}$

Dimensions in millimetres

	1		1					in minimieu es
Th	read $(D \times P)$	M10×1	M12×1,25	M14×1,5	M18×2	M18×1,5	M20×1,5	M22×2
c	max.	0,60	0,60	0,60	0,80	0,80	0,80	0,80
	min.	0,15	0,15	0,15	0,20	0,20	0,20	0,20
a	max.	10,80	13,00	15,10	19,50	19,50	21,60	23,70
<i>d</i> a	min.	10,00	12,00	14,00	18,00	18,00	20,00	22,00
d_{w}	min.	14,63	16,63	19,64	24,85	24,85	27,70	31,35
e	min.	17,77	20,03	23,36	29,56	29,56	32,95	37,29
	max.	8,40	10,80	12,80	15,80	15,80	18,00	19,40
m	min.	8,04	10,37	12,10	15,10	15,10	16,90	18,10
mw	min.	6,43	68,30	N9,68 A	12,08 _R	12,08	13,52	14,48
	nom. = max.	16,00	18,00	21,00	27,00	27,00	30,00	34,00
s —	min.	15,73	17,73	20,67	26,16	26,16	29,16	33,00
Thread $(D \times P)$		M22×1,5	M27×2	M33×2DIS	<u>8673</u> M39×3	M45×3	M52×4	M60×4
	max.	0,80 https://	standards iteh.ai 0,80	catalog/standard 0,80 78408054825/i	s/sist/c99b8acd- 1,00 so-dis-8673	4a59-47d0-800 1,00	1,00	1,00
С	min.	0,20	0,20	0,20	0,30	0,30	0,30	0,30
ı	max.	23,70	29,10	35,60	42,10	48,60	56,20	64,80
$d_{\rm a}$	min.	22,00	27,00	33,00	39,00	45,00	52,00	60,00
d_{w}	min.	31,35	38,00	46,55	55,86	64,70	74,19	83,41
e	min.	37,29	45,20	55,37	66,44	76,95	88,25	99,21
m	max.	19,40	23,80	28,70	33,40	36,00	42,00	48,00
	-		22,50	27,40	31,80	34,40	40,40	46,40
111	min.	18,10	22,30	27,10				
m _w	min. min.	18,10 14,48	18,00	21,92	25,44	27,52	32,32	37,12
		,	·		25,44 60,00	27,52 70,00	32,32 80,00	37,12 90,00

4 Requirements and reference International Standards

See Table 3.

Table 3 — Requirements and reference International Standards

Mate	rial	Ste	el	Stainless	steel	Non-ferrous metal			
General requirements	International Standard								
	Tolerance class	6Н ^а							
Thread	International Standards	ISO 262, ISO 724, ISO 965-2							
	Property class	8 mm ≤ <i>D</i> ≤ 16 mm	6 ^b ,8 ^c ,10 ^c	8 mm ≤ <i>D</i> ≤ 24 mm	A2-70, A4-70, A4-80				
Mechanical		16 mm < <i>D</i> ≤39 mm	6 ^c , 8 ^c , 10 ^c	24 mm < <i>D</i> ≤ 39 mm	A2-50, A2- 70, A4-70, A4-80	Mechanical			
properties		D < 8 mm and D > 39 mm	Mechanical properties as agreed ^d	D < 8 mm and D > 39 mm	Mechanical properties as agreed	properties as agreed			
	International Standards	(stand							
Tolerance	Product grade https://st	andards.iteh.ai/catalo	ISO/DIS 8673 g/standards/sist/c9	<i>D</i> ≤ 16 mm: A <i>D</i> > 16 mm: B 9b8acd-4a59-47d0-	800f-				
Tolerance	International Standard	178d08054825/iso-dis-8673 ISO 4759-1							
		As processed		Clean and bright	As processed				
		Requirements for e specified in ISO 404	quirements for electroplating are ecified in ISO 4042. A method for passivation is specified in ISO 16048.		Requirements for electroplating are				
Finish — Coating		Requirements for n electrolytically app coatings are specific	non- lied zinc flake			specified in ISO 4042.			
		Additional requirements or other finishes or coatings shall be agreed between the supplier and the purchaser.							
Surface integrity		Limits for surface dare specified in ISO		_		_			
Acceptability		Acceptance inspection is specified in ISO 3269.							

^a Other tolerance classes may be specified prior to coating, depending on the type of coating to be applied. For coated nuts, see relevant coating standards, e.g. ISO 4042 and ISO 10683.

5 Designation

EXAMPLE A hexagon regular nut (style 1), with nominal diameter 16 mm, with fine pitch 1,5 mm and property class 8 is designated as follows:

b May be quenched and tempered at the manufacturer's discretion, in accordance with ISO 898-2.

^c Shall be quenched and tempered in accordance with ISO 898-2.

d See ISO/TR 16224 for information.

Hexagon regular nut ISO $8673 - M16 \times 1,5 - 8$

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/DIS 8673

https://standards.iteh.ai/catalog/standards/sist/c99b8acd-4a59-47d0-800f-178d08054825/iso-dis-8673

Bibliography

ISO/TR 16224, Technical aspects of nut design

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/DIS 8673 https://standards.iteh.ai/catalog/standards/sist/c99b8acd-4a59-47d0-800f-178d08054825/iso-dis-8673