
**Transport packaging — Small load
container systems —**

**Part 3:
Bond Stackable System (BSS)**

Emballage — Systèmes de transport de petites charges —

Partie 3: Systèmes à gerbage croisé (SCG)
iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TS 19709-3:2016](https://standards.iteh.ai/catalog/standards/sist/aeaacea5-2e4f-4122-87e7-8deff192909a/iso-ts-19709-3-2016)

<https://standards.iteh.ai/catalog/standards/sist/aeaacea5-2e4f-4122-87e7-8deff192909a/iso-ts-19709-3-2016>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/TS 19709-3:2016

<https://standards.iteh.ai/catalog/standards/sist/aeaacea5-2e4f-4122-87e7-8deff192909a/iso-ts-19709-3-2016>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Characteristics.....	2
5 Dimensions, masses and applied loads.....	2
5.1 BSS SLC.....	2
5.1.1 Main dimensions and tolerances.....	2
5.1.2 Detailed dimensions for BSS SLCs.....	4
5.2 Accessories.....	6
6 Essential functional features.....	12
6.1 BSS SLC.....	12
6.2 Carrying handles.....	13
6.3 Vertical ribs for lifting grippers.....	14
6.4 Centering holes.....	15
6.5 BSS-SLC base.....	15
7 Material.....	15
8 Marking and labelling.....	15
Annex A (informative) Bond stacking of palletized loads on transport pallets with a size of 1 200 mm × 1 000 mm.....	16
Annex B (informative) Colours.....	18

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 122, *Packaging*.

ISO 19709 consists of the following parts, under the general title *Transport packaging — Small load container systems*:

- *Part 1: Common requirements and test methods*
- *Part 2: Column Stackable System (CSS)* [Technical Specification]
- *Part 3: Bond Stackable System (BSS)* [Technical Specification]

Introduction

The small load container (SLC) system specified in this part of ISO 19709 was first conceived for handling, storage and transport of goods and designed to meet the needs of automotives manufacturers and their suppliers.

The multi-functional design of its elements allow a SLC system manufactured in accordance with ISO 19709 to meet the requirements of different manual, mechanical and automatic handling, transport and storage systems in the automotive industry transportation chain. It is likely that this system of SLCs and accessories will frequently be used in a pool.

The special characteristic of the system specified in ISO 19709 is the self-securing mechanism of the unit load in the column stack. For this reason this system is called column stackable system.

The CS system consists of the following elements:

- CSS-SLC;
- Lid [the prefix “D” reflects the German term for “lid” (Deckel)];
- Pallet cover [the prefix “A” reflects the German term for “cover” (Abdeckung)].

The use of CSS-SLC systems with palletized loads is discussed in [Annex A](#).

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/TS 19709-3:2016](#)

<https://standards.iteh.ai/catalog/standards/sist/aeaacea5-2e4f-4122-87e7-8deff192909a/iso-ts-19709-3-2016>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/TS 19709-3:2016

<https://standards.iteh.ai/catalog/standards/sist/aeaacea5-2e4f-4122-87e7-8deff192909a/iso-ts-19709-3-2016>

Transport packaging — Small load container systems —

Part 3: Bond Stackable System (BSS)

1 Scope

This part of ISO 19709 specifies the main characteristics and the testing of durable, reusable, parallelepipedic containers and their accessories which form a bond stackable system (BSS) designed to contain bulk or precisely located component loads up to maximum load of 20 kg used for automotive industry applications.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 19709-1:—¹⁾, *Transport packaging — Small load container systems — Part 1: Common requirements and test methods*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 19709-1 and the following apply.

3.1

BSS small load container

small load container (SLC) with special functional features which ensure a mutual compatibility

3.2

self-securing

design feature which allows the base of an BSS-SLC to interlock with a system pallet to ensure stability of a stack of BSS-SLCs without use of additional securing measures such as strapping, stretch, or shrink wrapping

3.3

pallet cover

system element with a safeguarding and protective function that closes the top of the loading unit with a level surface that distributes the mass of overlying loads in a stack

3.4

SLC capacity

usable inner volume which is calculated by multiplying the usable inner length by the usable inner width (both measured at half height) and the usable inner height

3.5

SLC lid (D 65, D 45, D 35)

BSS-SLC and CSS-SLC system elements with virtually neutral height for protection of the cargo

Note 1 to entry: The prefix “D” reflects the German term for “lid” (Deckel).

1) To be published.

Note 2 to entry: The number 65 means lid for the 600 mm × 400 mm size containers. The number 45 means lid for the 400 mm × 300 mm size containers. The number 35 means lid for the 300 mm × 200 mm size containers.

3.6 SLC unit load

load consisting of a SLC which forms a unit for handling, transport, stacking and storage

4 Characteristics

The heights of BSS SLCs are determined in such a way that when used in combination with a 150 mm high pallet and a cover they form a nominal unit load height of 1 000 mm (see [Annex A](#)).

The bond stackable system is characterized by the following features:

- a) maximum load: 20 kg;
- b) “load space” and “functional space for handling” are clearly separated;
- c) smooth, flat internal SLC surfaces without undercuts permit rapid, reliable manual removal of the contents and mechanical/automatic filling and emptying;
- d) functional features see [Clause 6](#).

5 Dimensions, masses and applied loads


iTeh STANDARD PREVIEW
(standards.iteh.ai)

5.1 BSS SLC

5.1.1 Main dimensions and tolerances

When tested in accordance with [ISO 19709-1](#), [Annex A](#), [A.2.1](#), [A.2.2](#) and [A.2.4](#), the main dimensions of the BSS SLC shall be as given in [Table 1](#).

The flange height shall be 15 mm (see [Figure 1](#)).

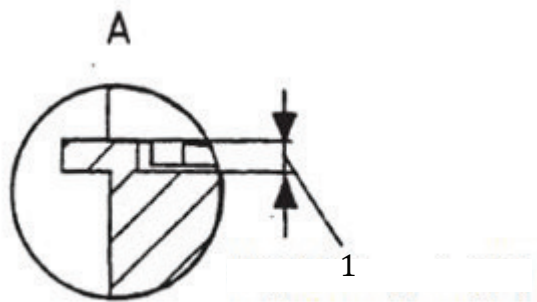

Key
1 height ≥ flange height

Figure 1 — Flange height

The stacking clearance shall ensure an easy location when two BSS SLCs are stacked. Stacking clearance in length and width of two BSS SLCs may not exceed 4,8 mm.

To ensure the functioning of the BSS, the overall height of an individual BSS SLC shall be 147,5 mm or 213 mm or 280 mm.

NOTE For the area base module of 300 mm × 200 mm only, the height ratios of 147,5 mm is applicable.

Table 1 — Main dimensions of BSS SLCs

Dimensions in millimetres

Type	Nominal dimension L×W×H	Length			Width			Height			Tolerance
		outer	inner	tolerance	outer	inner	tolerance	total	inner	usable inner height F	
6429	600 × 400 × 280	594	540	0 -4,8	396	361,5	0 -3,2	280	257	242	±1
6422	600 × 400 × 213							213	190	175	
6415	600 × 400 × 147							147,5	124,5	109,5	
4329	400 × 300 × 280	396	342,5	0 -3,2	297	263	0 -2,4	280	257	242	±1
4322	400 × 300 × 213							213	190	175	
4315	400 × 300 × 147							147,5	124,5	109,5	
3215	300 × 200 × 147	297	241	0 -2,4	198	161	0 -1,6	147,5	144,5	129,5	±1

When tested in accordance with ISO 19709-1: —, Annex A, A.2.1, A.2.2 and A.2.4, volumes and masses of BSS SLC shall be as given in [Table 2](#).


Table 2 — Volumes and masses of BSS SLCs

Type	Volume dm ³		Tare mass ±1 % kg	Nominal load kg	Nominal stacking load kg
	outer	usable inner (capacity)			
6429	65	48	2,97	20	600
6422	51	34,9	2,6		
6415	35	22	2,1		
4329	33	22	1,85		
4322	25,5	16,2	1,61		
4315	17	10	1,29		
3215	8,7	5,3	0,57	20	400

5.1.2 Detailed dimensions for BSS SLCs

Detailed dimensions for BSS SLC shall be as given in Figures 2, 3 and 4.

Dimensions in millimetres

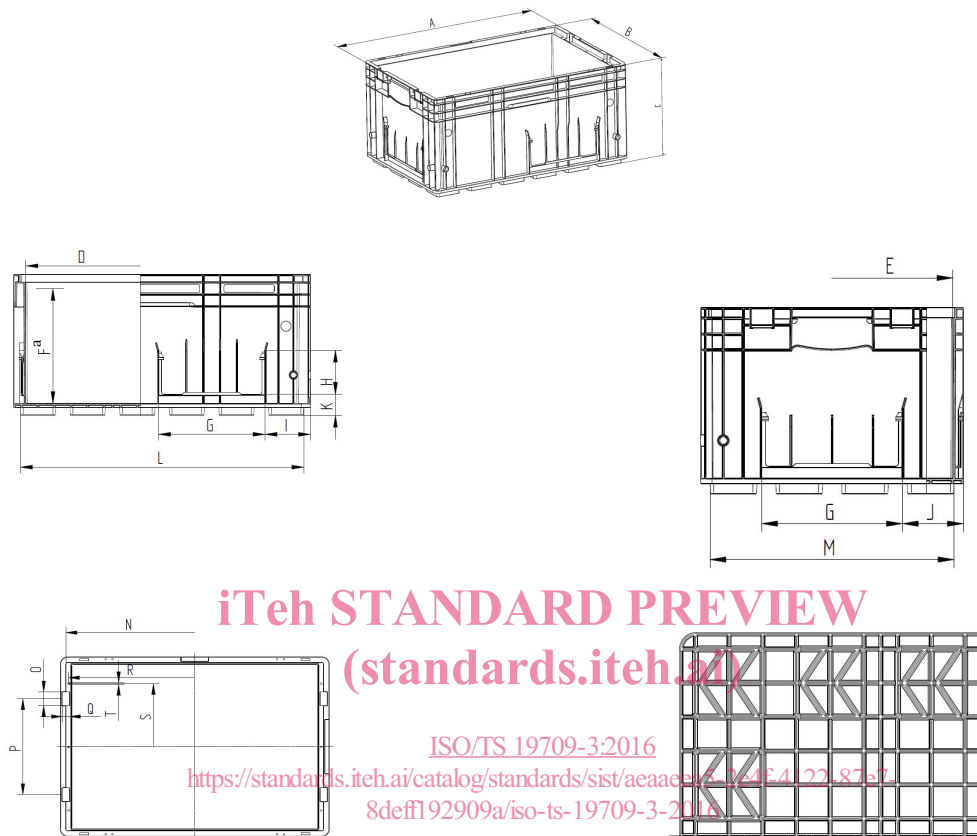


Key

a Usable inner height.

SLC type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
6415	594	396	147,5	540	361,5	109,5	212	82	92	92	65,5	563	366	567	30	210	15	556	280	Ø4
6422	594	396	213	540	361,5	190	212	82	92	92	41,5	563	366	567	30	210	15	556	280	Ø4
6429	594	396	280	540	361,5	242	212	82	92	92	41,5	563	366	567	30	210	15	556	280	Ø4

Figure 2 — BSS SLC type 6415 and BSS SLC type 6429

Dimensions in millimetres

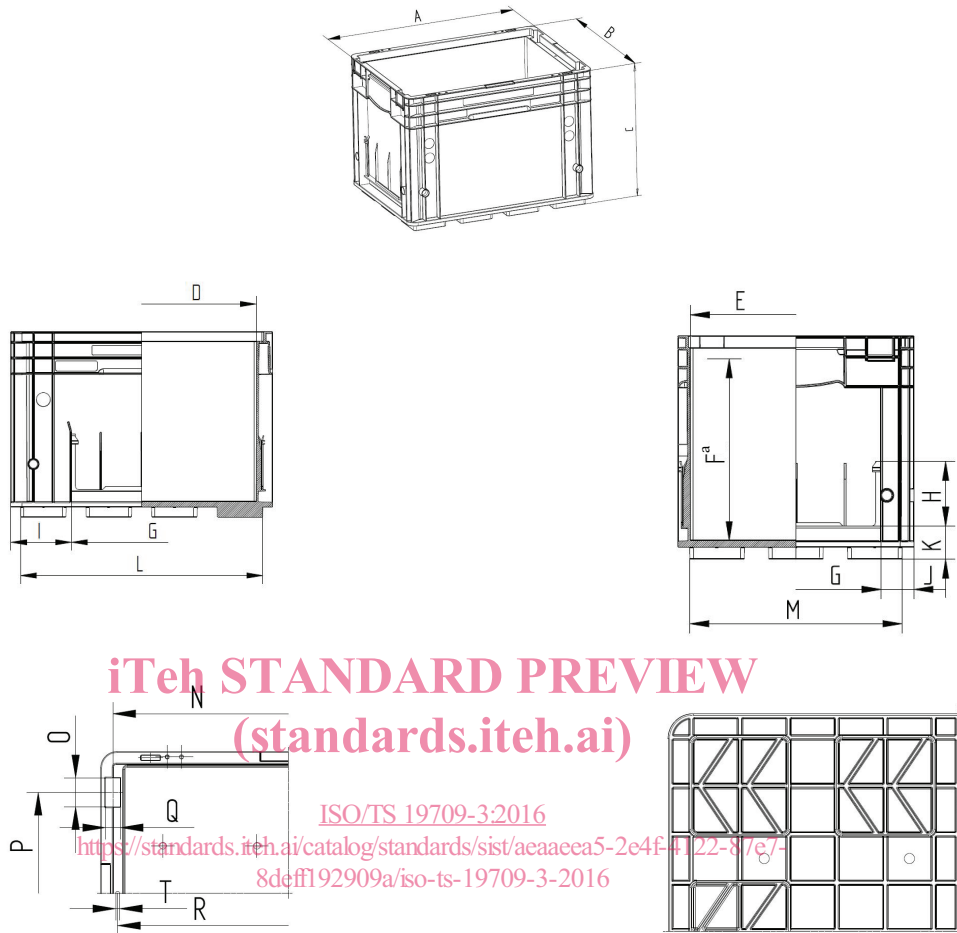

Key

a Usable inner height.

SLC type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	T
4315	396	297	147,5	342,5	263	109,5	212	82	92	42,5	65,5	365	266	369,5	30	211	15	257	Ø4
4322	396	297	213	342,5	263	190	212	82	9	42,5	41,5	365	266	369,5	30	211	15	257	Ø4
4329	396	297	280	342,5	263	242	212	82	92	42,5	41,5	365	266	369,5	30	211	15	257	Ø4

Figure 3 — BSS SLC type 4315 and BSS SLC type 4329