

---

---

## Hydrometry — Open channel flow measurement using thin-plate weirs

*Hydrométrie — Mesure de débit dans les canaux découverts au moyen  
de déversoirs à paroi mince*

iTeh Standards  
(<https://standards.iteh.ai>)  
Document Preview

[ISO 1438:2017](https://standards.iteh.ai/catalog/standards/iso/c9b30af3-12e7-4151-8e84-82cd6a732d89/iso-1438-2017)

<https://standards.iteh.ai/catalog/standards/iso/c9b30af3-12e7-4151-8e84-82cd6a732d89/iso-1438-2017>



iTeh Standards  
(<https://standards.iteh.ai>)  
Document Preview

ISO 1438:2017

<https://standards.iteh.ai/catalog/standards/iso/c9b30af3-12e7-4151-8e84-82cd6a732d89/iso-1438-2017>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

Page

<b>Foreword</b>	<b>v</b>
<b>1 Scope</b>	<b>1</b>
<b>2 Normative references</b>	<b>1</b>
<b>3 Terms and definitions</b>	<b>1</b>
<b>4 Symbols and abbreviated terms</b>	<b>1</b>
<b>5 Principle</b>	<b>2</b>
<b>6 Installation</b>	<b>2</b>
6.1 General	2
6.2 Selection of site	2
6.3 Installation conditions	2
6.3.1 General	2
6.3.2 Weir	3
6.3.3 Approach channel	3
6.3.4 Downstream channel	4
<b>7 Measurement of head</b>	<b>4</b>
7.1 Head-measuring devices	4
7.2 Stilling or float well	5
7.3 Head-measurement section	5
7.3.1 Upstream head-measurement	5
7.3.2 Downstream head measurement	5
7.4 Head-gauge datum (gauge zero)	5
<b>8 Maintenance</b>	<b>6</b>
<b>9 Rectangular thin-plate weir</b>	<b>6</b>
9.1 Types	6
9.2 Specifications for the standard weir	8
9.3 Specifications for installation	8
9.4 Determination of gauge zero	8
9.5 Discharge formulae — General	11
9.6 Formulae for the basic weir form (all values of $b/B$ )	11
9.6.1 Kindsvater-Carter formula	11
9.6.2 Evaluation of $C_d$ , $k_b$ and $k_h$	11
9.6.3 Formulae for $C_d$	13
9.6.4 Practical limitations on $h/p$ , $h$ , $b$ and $p$	14
9.7 Formulae for full-width weirs ( $b/B = 1,0$ )	14
9.7.1 Modular flow discharge formula	14
9.7.2 Non-modular flow discharge formula	15
<b>10 Triangular-notch thin-plate weir</b>	<b>16</b>
10.1 Specifications for the standard weir	16
10.2 Specifications for the installation	19
10.3 Specifications for head measurement	19
10.3.1 General	19
10.3.2 Determination of notch angle	19
10.3.3 Determination of gauge zero	19
10.4 Discharge formulae — General	20
10.5 Formula for all notch angles between $\pi/9$ and $5\pi/9$ radians ( $20^\circ$ and $100^\circ$ )	20
10.5.1 Kindsvater-Shen formula	20
10.5.2 Evaluation of $C_d$ and $k_h$	20
10.5.3 Practical limitations on $\alpha$ , $h/p$ , $p/B$ , $h$ and $p$	22
10.6 Formula for specific notch angles (fully-contracted weir)	22
10.7 Accuracy of discharge coefficients — Triangular-notch weirs	23

<b>11</b>	<b>Uncertainties of flow measurement</b>	<b>23</b>
11.1	General	23
11.2	Combining measurement uncertainties	24
11.3	Uncertainty of discharge coefficient, $u^*(C_d)$ , for thin-plate weirs	25
11.4	Uncertainty budget	26
<b>12</b>	<b>Example</b>	<b>26</b>
12.1	General	26
12.2	Characteristics — Gauging structure	26
12.3	Characteristics — Gauged head instrumentation	27
12.4	Discharge coefficient	27
12.5	Discharge estimate	27
12.6	Uncertainty statement	27
<b>Annex A</b> (informative)	<b>Flow measurement with small weir tanks</b>	<b>30</b>
<b>Annex B</b> (normative)	<b>Guide to the design and installation of a flow straightener</b>	<b>32</b>
<b>Annex C</b> (informative)	<b>Introduction to measurement uncertainty</b>	<b>34</b>
<b>Annex D</b> (informative)	<b>Sample measurement performance for use in hydrometric worked examples</b>	<b>42</b>
<b>Annex E</b> (informative)	<b>Specimen tables</b>	<b>45</b>
<b>Bibliography</b>		<b>60</b>

iTeh Standards  
(<https://standards.itih.ai>)  
Document Preview

[ISO 1438:2017](https://standards.itih.ai/catalog/standards/iso/c9b30af3-12e7-4151-8e84-82cd6a732d89/iso-1438-2017)

<https://standards.itih.ai/catalog/standards/iso/c9b30af3-12e7-4151-8e84-82cd6a732d89/iso-1438-2017>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 113, *Hydrometry*, Subcommittee SC 2, *Flow measurement structures*.

This third edition cancels and replaces the second edition (ISO 1438:2008), which has been technically revised. It also incorporates the Technical Corrigendum ISO 1438:2008/Cor 1:2008.

The major changes from ISO 1438:2008 are as follows:

- a) the modular flow discharge formula for weirs with weir plate height of  $1 \text{ m} \leq p \leq 2,5 \text{ m}$  has been supplemented in [9.7.1](#);
- b) the  $C_d$  formula for rectangular weir with  $b/B = 1,0$ , [Formula \(5\)](#), has been corrected to the same formula as the full-width weir, [Formula \(15\)](#);
- c) subclause numbers of [9.6](#) have been re-numbered.



# Hydrometry — Open channel flow measurement using thin-plate weirs

## 1 Scope

This document defines the requirements for the use of rectangular and triangular (V-notch) thin-plate weirs for the measurement of flow of clear water in open channels under free flow conditions. It includes the requirements for the use of full-width rectangular thin-plate weirs in submerged (drowned) flow conditions.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 772, *Hydrometry — Vocabulary and symbols*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 772 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

## 4 Symbols and abbreviated terms

Symbol	Unit	Description
$A$	$\text{m}^2$	Area of approach channel
$B$	$\text{m}$	Width of approach channel
$b$	$\text{m}$	Measured width of the notch
$b_{\text{max}}$	$\text{m}$	Width of notch at maximum head (V-notch)
$C$		Discharge coefficient (gauged head)
$C_d$		Coefficient of discharge
$f$		Drowned flow reduction factor
$C_v$		Coefficient of velocity
$e_b$	$\text{m}$	Random uncertainty in the width measurement
$g$	$\text{m/s}^2$	Acceleration due to gravity
$H$	$\text{m}$	Total head above crest level
$h$	$\text{m}$	Upstream gauged head above crest level (upstream head is inferred if no subscript is used)
$J$		Numerical constant
$l$	$\text{m}$	Distance of the head measurement section upstream of the weir
$n$		Number of measurements in a set
$p$	$\text{m}$	Height of the crest relative to the floor
$Q$	$\text{m}^3/\text{s}$	Volumetric rate of flow

Symbol	Unit	Description
$S$		Submergence ratio, $h_2/h_1$
$S_1$		Modular limit
$\bar{V}$	m/s	Mean velocity
$U$	%	Expanded percentage uncertainty
$u^*(b)$	%	Percentage uncertainty in $b$
$u^*(C)$	%	Percentage uncertainty in $C$
$u^*(E)$	%	Percentage uncertainty in datum measurement
$u^*(h_1)$	%	Percentage uncertainty in $h_1$
$u^*(Q)$	%	Percentage uncertainty in $Q$
$\alpha$	°	Notch angle

### Subscripts

1	upstream
2	downstream
e	effective
r	rectangular
t	triangular

## 5 Principle

The discharge over thin-plate weirs is a function of the upstream head on the weir (for free-flow), upstream and downstream head (for drowned flow), the size and shape of the discharge area, and an experimentally determined coefficient which takes into account the head, the geometrical properties of the weir and approach channel, and the dynamic properties of the water.

## 6 Installation

### 6.1 General

General requirements of weir installations are described in the following clauses. Special requirements of different types of weirs are described in clauses which deal with specific weirs (see [Clause 9](#) and [Clause 10](#)).

### 6.2 Selection of site

The type of weir to be used for discharge measurement is determined in part by the nature of the proposed measuring site. Under some conditions of design and use, weirs shall be located in rectangular flumes or in weir boxes which simulate flow conditions in rectangular flumes. Under other conditions, weirs may be located in natural channels, as well as flumes or weir boxes, with no significant difference in measurement accuracy. Specific site-related requirements of the installation are described in [6.3](#).

### 6.3 Installation conditions

#### 6.3.1 General

Weir discharge is critically influenced by the physical characteristics of the weir and the weir channel. Thin-plate weirs are especially dependent on installation features which control the velocity



distribution in the approach channel and on the construction and maintenance of the weir crest in meticulous conformance with standard specifications.

### 6.3.2 Weir

Thin-plate weirs shall be vertical and perpendicular to the walls of the channel. The intersection of the weir plate with the walls and floor of the channel shall be watertight and firm, while the weir shall be capable of withstanding the maximum flow without distortion or damage.

Stated practical limits associated with different discharge formulae such as minimum width, minimum weir height, minimum head, and maximum values of  $h/p$  and  $b/B$  (where  $h$  is the measured head,  $p$  is the height of crest relative to floor,  $b$  is the measured width of the notch and  $B$  is the width of the approach channel), are factors which influence both the selection of weir type and the installation.

### 6.3.3 Approach channel

For the purposes of this document, the approach channel is the portion of the weir channel which extends upstream from the weir a distance not less than five times the width of the nappe at maximum head. If the weir is located in a weir tank, ideally, the length of the tank should equal up to 10 times the width of the nappe at maximum head. Information on the use of small weir tanks is given in [Annex A](#).


The flow in the approach channel shall be uniform and steady, with the velocity distribution approximating that in a channel of sufficient length to develop satisfactory flow in smooth, straight channels. [Figure 1](#) shows measured velocity distributions perpendicular to the direction of flow in rectangular channels, upstream from the influence of a weir. Baffles and flow straighteners can be used to simulate satisfactory velocity distribution, but their location with respect to the weir shall be not less than the minimum length prescribed for the approach channel.

The influence of approach-channel velocity distribution on weir flow increases as  $h/p$  and  $b/B$  increase in magnitude. If a weir installation unavoidably results in a velocity distribution that is appreciably non-uniform, the possibility of error in calculated discharge should be checked by means of an alternative discharge-measuring method for a representative range of discharges.

If the approach conditions are judged to be unsatisfactory, then flow straighteners shall be introduced in accordance with [Annex B](#).

If the maximum head to be measured is restricted to  $(2/3)p$  for all types of weirs, flow straighteners can be used to reduce the effective length of the approach channel to  $B + 3h_{\max}$  for triangular and rectangular weirs and to  $B + 5h_{\max}$  for full-width weirs.

**NOTE** This restriction on the maximum head to be measured is necessary due to distortion of the velocity near the water surface in the approach channel that results from flow coming through the openings in the baffle of the flow straightener.

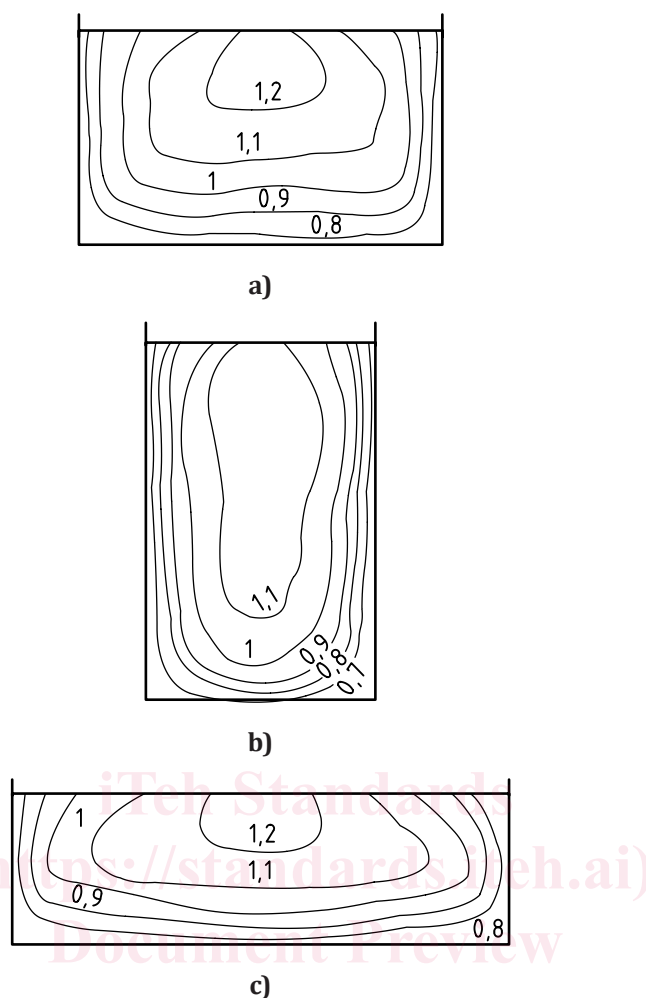

NOTE The contours refer to values of local flow velocity relative to the mean cross-sectional velocity.

**Figure 1 — Examples of normal velocity distribution in rectangular channels**

#### 6.3.4 Downstream channel

For most applications, the level of the water in the downstream channel shall be a sufficient vertical distance below the crest to ensure free, fully ventilated discharges. Free (non-submerged) discharge occurs when the discharge is independent of the downstream water level. Fully ventilated discharge is ensured when the air pressure on the lower surface of the nappe is fully ventilated. Drowned flow operation is permitted for full-width weirs under certain conditions (see 9.7.2). Under these circumstances, downstream water levels may rise above crest level.

## 7 Measurement of head

### 7.1 Head-measuring devices

In order to obtain the discharge measurement accuracies specified for the standard weirs, the head on the weir shall be measured with a laboratory-grade hook gauge, point gauge, manometer, or other gauge of equivalent accuracy. For a continuous record of head variants, precise float gauges and servo-operated point gauges can be used. Staff and tape gauges can be used when less accurate measurements are acceptable.

Additional specifications for head-measuring devices are given in ISO 4373.

## 7.2 Stilling or float well

For the exceptional case where surface velocities and disturbances in the approach channel are negligible, the headwater level can be measured directly (for example, by means of a point gauge mounted over the water surface). Generally, however, to avoid water-level variations caused by waves, turbulence or vibration, the headwater level should be measured in a separate stilling well.

Separate stilling wells are connected to the approach channel by means of a suitable conduit, equipped if necessary with a throttle valve to damp oscillations. At the channel end of the conduit, the connection is made to floor or wall piezometers or a static tube at the head-measurement section.

Additional specifications for stilling wells are given in ISO 18365.

## 7.3 Head-measurement section

### 7.3.1 Upstream head-measurement

The head-measurement section shall be located a sufficient distance upstream from the weir to avoid the region of surface drawdown caused by the formation of the nappe. On the other hand, it shall be sufficiently close to the weir that the energy loss between the head-measurement section and the weir is negligible. For the weirs included in this document, the location of the head-measurement section will be satisfactory if it is at a distance equal to two to four times the maximum head ( $2h_{\max}$  to  $4h_{\max}$ ) upstream from the weir.

If high velocities occur in the approach channel or if water-surface disturbances or irregularities occur at the head-measurement section because of high values of  $h/p$  or  $b/B$ , it may be necessary to install several pressure intakes to ensure that the head measured in the gauge well is representative of the average head across the measurement section.

In the case of a full-width thin-plate weir, the effect of frictional effects upon the upstream channel requires an adjustment to the standard coefficient of discharge. The correction is in terms of both  $l/h$  and  $h/p$  and given in Table 1.

ISO 1438:2017  
https://standards.iso.org/standards.html Table 1 — Factors to be applied to the standard discharge coefficient values 2017

$h/p$	$l/h$			
	2	4	6	8
3,5 to 4,0	1,00	1,00	0,96	0,92
3,0 to 3,5	1,00	1,00	0,97	0,94
2,5 to 3,0	1,00	1,00	0,98	0,96
2,0 to 2,5	1,00	1,00	0,99	0,98
Less than 2,0	1,00	1,00	1,00	1,00

### 7.3.2 Downstream head measurement

If the weir is to be operated in the submerged (drowned) flow range, a measurement of downstream head is required in addition to the upstream. The downstream head measurement position shall be  $10 h_{\max}$  downstream from the upstream face of the weir. If a stilling well is included in the design, it is recommended that the downstream head measurement be located no closer to the weir than  $4 h_{\max}$ .

## 7.4 Head-gauge datum (gauge zero)

Accuracy of head measurements is critically dependent upon the determination of the head-gauge datum or gauge zero, which is defined as the gauge reading corresponding to the level of the weir crest (rectangular weirs) or the level of the vertex of the notch (triangular-notch weirs). When necessary, the gauge zero shall be checked. Numerous acceptable methods of determining the gauge zero are in

use. Typical methods are described in subsequent clauses dealing specifically with rectangular and triangular weirs. See [Clause 9](#) and [Clause 10](#).

Because of surface tension, the gauge zero cannot be determined with sufficient accuracy by reading the head gauge with the water in the approach channel drawn down to the apparent crest (or notch) level.

## 8 Maintenance

Maintenance of the weir and the weir channel is necessary to ensure accurate measurements.

The approach channel shall be kept free of silt, vegetation and obstructions which might have deleterious effects on the flow conditions specified for the standard installation. The downstream channel shall be kept free of obstructions which might cause submergence or inhibit full ventilation of the nappe under all conditions of flow.

The weir plate shall be kept clean and firmly secured. In the process of cleaning, care shall be taken to avoid damage to the crest or notch, particularly the upstream edges and surfaces. Construction specifications for these most sensitive features should be reviewed before maintenance is undertaken.

Head-measurement piezometers, connecting conduits and the stilling well shall be cleaned and checked for leakage. The hook or point gauge, manometer, float or other instrument used to measure the head shall be checked periodically to ensure accuracy.


If a flow straightener is used in the approach channel, perforated plates shall be kept clean so that the percentage open area remains greater than 40 %.

## 9 Rectangular thin-plate weir

### 9.1 Types

The rectangular thin-plate weir is a general classification in which the rectangular-notch weir is the basic form and the full-width weir is a limiting case. A diagrammatic illustration of the basic weir form is shown in [Figure 2](#) with intermediate values of  $b/B$  and  $h/p$ . When  $b/B = 1,0$ , that is, when the width of the weir ( $b$ ) is equal to the width of the channel at the weir section ( $B$ ), the weir is of full-width type (also referred to as a “suppressed” weir, because its nappe lacks side contractions).

Dimensions in millimetres

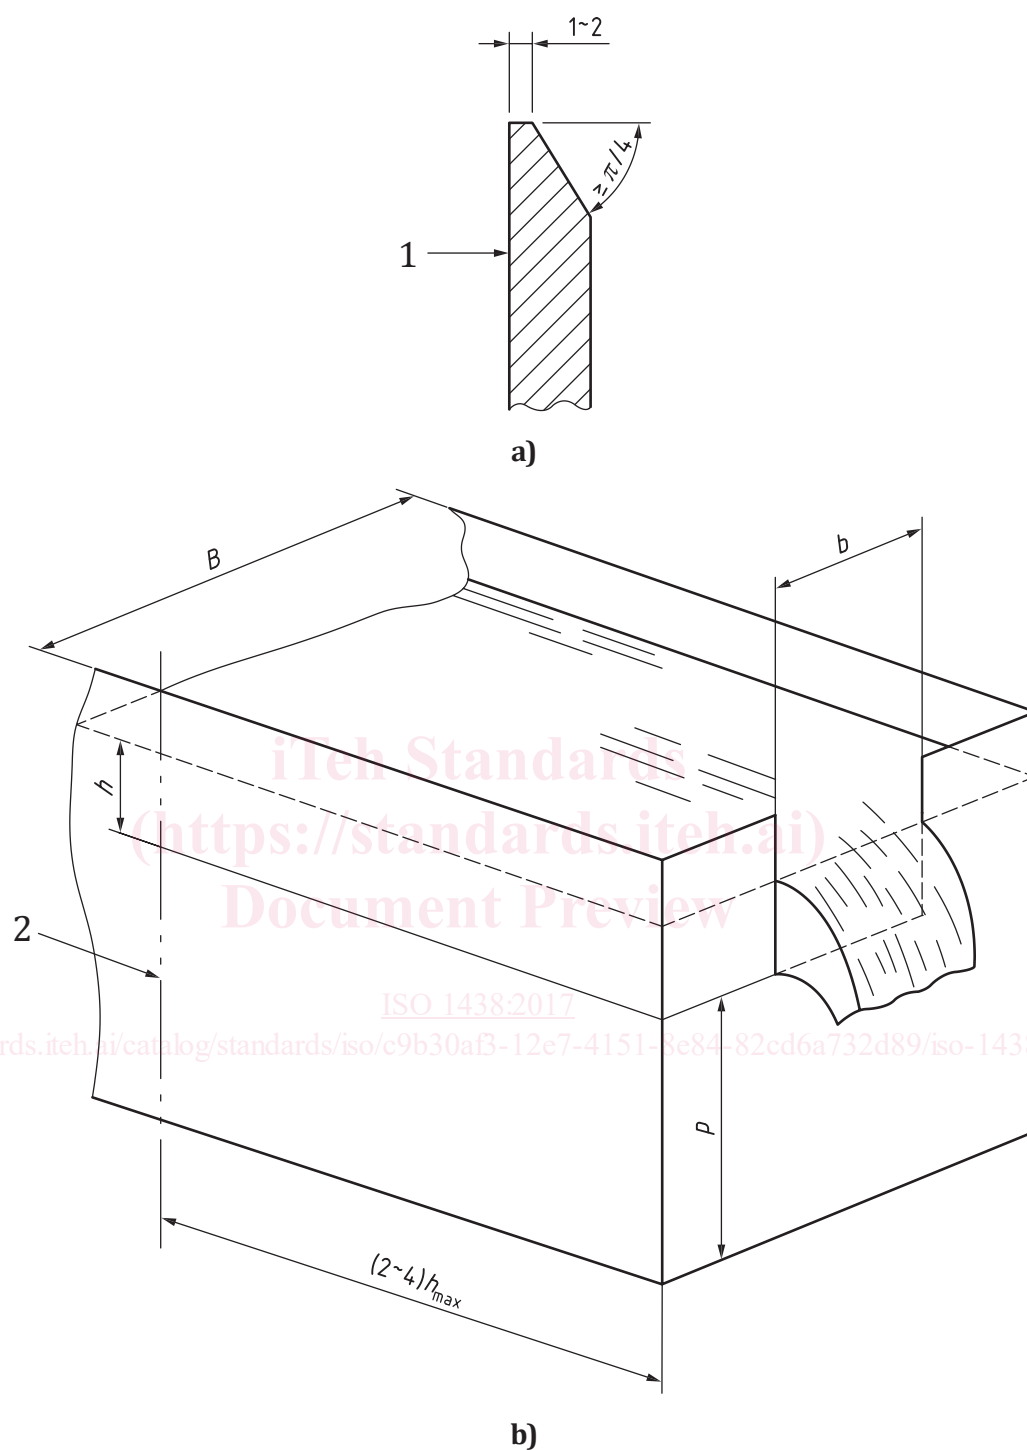**Key**

- 1 upstream face of weir plate
- 2 head measurement section, measured value  $h$

**Figure 2 — Rectangular-notch, thin-plate weir**

## 9.2 Specifications for the standard weir

The basic weir form consists of a rectangular notch in a vertical thin plate. The plate shall be plane and rigid and perpendicular to the walls and the floor of the approach channel. The upstream face of the plate shall be smooth (in the vicinity of the notch, it shall be equivalent in surface finish to that of rolled sheet-metal).

The vertical bisector of the notch shall be equidistant from the two walls of the channel. The crest surface of the notch shall be a horizontal, plane surface, which shall form a sharp edge at its intersection with the upstream face of the weir plate. The width of the crest surface, measured perpendicular to the face of the plate, shall be between 1 mm and 2 mm. The side surfaces of the notch shall be vertical plane surfaces which shall make sharp edges at their intersection with the upstream face of the weir plate. For the limiting case of the full-width weir, the crest of the weir shall extend to the walls of the channel, which, in the vicinity of the crest, shall be plane and smooth (see also [9.3](#)).

To ensure that the upstream edges of the crest and the sides of the notch are sharp, they shall be machined or filed, perpendicular to the upstream face of the weir plate, free of burrs or scratches, and untouched by abrasive cloth or paper. The downstream edges of the notch shall be chamfered if the weir plate is thicker than the maximum allowable width of the notch surface. The surface of the chamfer shall make an angle of not less than  $\pi/4$  radians ( $45^\circ$ ) with the crest and side surfaces of the notch (see detail shown in [Figure 2](#)). The weir plate in the vicinity of the notch preferably shall be made of corrosion-resistant metal; but if it is not, all specified smooth surfaces and sharp edges shall be kept coated with a thin protective film (for example, oil, wax and silicone) applied with a soft cloth.

## 9.3 Specifications for installation

The specifications stated in [6.3](#) shall apply. In general, the weir shall be located in a straight, horizontal, rectangular approach channel if possible. However, if the effective opening of the notch is so small in comparison with the area of the upstream channel that the approach velocity is negligible, the shape of the channel is not significant. In any case, the flow in the approach channel shall be uniform and steady, as specified in [6.3.3](#).

If the width of the weir is equal to the width of the channel at the weir section (i.e. a full-width weir), the sides of the channel upstream from the plane of the weir shall be vertical, plane, parallel and smooth (equivalent in surface finish to that of rolled sheet-metal). The sides of the channel above the level of the crest of a full-width weir shall extend at least  $0,3 h_{\max}$  downstream from the plane of the weir. Fully ventilated discharge shall be ensured as specified in [6.3.4](#).

The approach channel floor shall be smooth, flat and horizontal when the height of the crest relative to the floor ( $p$ ) is small and/or  $h/p$  is large. For rectangular weirs, the floor should be smooth, flat and horizontal, particularly when  $p$  is less than 0,1 m and/or  $h_{\max}/p$  is greater than 1. Additional conditions are specified in connection with the recommended discharge formulae.

## 9.4 Determination of gauge zero

The head-gauge datum or gauge zero shall be determined with great care and it shall be checked when necessary. A typical, acceptable method of determining the gauge zero for rectangular weirs is described as follows.

- a) Still water in the approach channel is drawn to a level below the weir crest.
- b) A temporary hook gauge is mounted over the approach channel, a short distance upstream from the weir crest.
- c) A precise machinists' level is placed with its axis horizontal, with one end lying on the weir crest and the other end on the point of the temporary hook gauge (the gauge having been adjusted to hold the level in this position). The reading of the temporary gauge is recorded.