

SLOVENSKI STANDARD**SIST EN 4641-200:2019****01-januar-2019**

**Aeronautika - Kabli, optični, zunanji premer obloge vlakna 125 µm - 200. del:
Polohlapna struktura obloge GI 9/125 µm, zunanji premer vlakna 0,9 mm -
Standard za proizvod**

Aerospace series - Cables, optical, 125 µm diameter cladding - Part 200: Semi-loose structure 9/125 µm GI fibre nominal 0,9 mm outside diameter - Product standard

Luft- und Raumfahrt - Kabel, optisch, 125 µm Außendurchmesser des Fasermantels - Teil 200: Festaderaufbau GI 9/125 µm, Faser Kabelaußendurchmesser 0,9 mm - Produktnorm

Série aérospatiale - Câbles, optiques, diamètre extérieur de la gaine optique 125 µm - Partie 200 : Câble à structure semi-libre, fibre à gradient d'indice 9/125 µm, diamètre extérieur 0,9 mm - Norme de produit

Ta slovenski standard je istoveten z: EN 4641-200:2018

ICS:

33.180.10	(Optična) vlakna in kabli	Fibres and cables
49.060	Letalska in vesoljska električna oprema in sistemi	Aerospace electric equipment and systems

SIST EN 4641-200:2019**en,fr,de**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

SIST EN 4641-200:2019

<https://standards.iteh.ai/catalog/standards/sist/57282781-cd26-4f16-9cd8-bb5fcb797135/sist-en-4641-200-2019>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 4641-200

November 2018

ICS 49.090

English Version

**Aerospace series - Cables, optical, 125 µm diameter
cladding - Part 200: Semi-loose structure 9/125 µm GI
fibre nominal 0,9 mm outside diameter - Product standard**

Série aérospatiale - Câbles, optiques, diamètre extérieur de la gaine optique 125 µm - Partie 200 :
Câble à structure semi-libre, fibre à gradient d'indice 9/125 µm, diamètre extérieur 0,9 mm - Norme de produit

Luft- und Raumfahrt - Lichtwellenleiterkabel,
Mantelaußendurchmesser 125 µm - Teil 200:
Kompaktaderstruktur, 9/125 µm GI-Faser,
Kabelaußendurchmesser 0,9 mm - Produktnorm

This European Standard was approved by CEN on 8 July 2018.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

(standards.iteh.ai)

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

<https://standards.iteh.ai/catalog/standards/sist/57282781-cd26-4f16-9cd8-00017730000000000000000000000000>

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

	Contents	Page
	European foreword	3
1	Scope	4
2	Normative references	4
3	Terms and definitions	4
4	Required characteristics	4
5	Cable construction	5
6	Materials	6
7	Test methods and performances	6
8	Tooling	12
9	Quality assurance	12
10	Designation and marking	13
11	Delivery conditions	13
12	Storage	13
13	Technical specification	13

ITEH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 4641-200:2019
<https://standards.iteh.ai/catalog/standards/sist/57282781-cd26-4f16-9cd8-bb5fcbb797135/sist-en-4641-200-2019>

European foreword

This document (EN 4641-200:2018) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2018, and conflicting national standards shall be withdrawn at the latest by May 2018.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 4641-200:2019

<https://standards.iteh.ai/catalog/standards/sist/57282781-cd26-4f16-9cd8-bb5fcbb797135/sist-en-4641-200-2019>

1 Scope

This European Standard specifies the general characteristics, conditions for qualification, acceptance and quality assurance for a fibre optic cable with a 9/125 µm, MM fibre core, and 900 µm outside cable diameter and of semi-loose buffer construction for “inside avionics box” equipment fibre harnessing.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2424, *Aerospace series — Marking of aerospace products*

EN 2812, *Aerospace series — Stripping of electric cables*

EN 3475-601, *Aerospace series — Cables, electrical, aircraft use — Test methods — Part 601: Smoke density*

EN 3745, (all parts), *Aerospace series — Fibres and cables, optical, aircraft use — Test methods*

EN 3838, *Aerospace series — Requirements and tests on user-applied markings on aircraft electrical cables*

EN 3909, *Aerospace series — Test fluids and test methods for electrical and optical components and sub-assemblies*

EN 4641-001, *Aerospace series — Cables, optical, 125 µm diameter cladding — Part 001: Technical specification*

IEC 60793-1-45, *Optical fibres — Part 1-45: Measurement methods and test procedures — Mode field diameter*¹⁾

TR 4647, *Aerospace series — Termination procedure for EN 4639 optical contact*²⁾

<https://standards.iteh.ai/catalog/standards/sist/57282781-cd26-4f16-9cd8-bb5fcbb797135/sist-en-4641-200-2019>

3 Terms and definitions

For the purposes of this document, the following terms and definitions given in EN 3745-100 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Required characteristics


The characteristics of the cables, tested according to the methods described hereafter shall comply with the values defined in this product standard.

1) Published by: IEC International Electrotechnical Commission <http://www.iec.ch/>

2) Published as ASD-STAN Technical Report at the date of publication of this standard by Aerospace and Defence Industries Association of Europe-Standardization (ASD-STAN), (www.asd-stan.org).

5 Cable construction

See Figure 1 and Table 1.

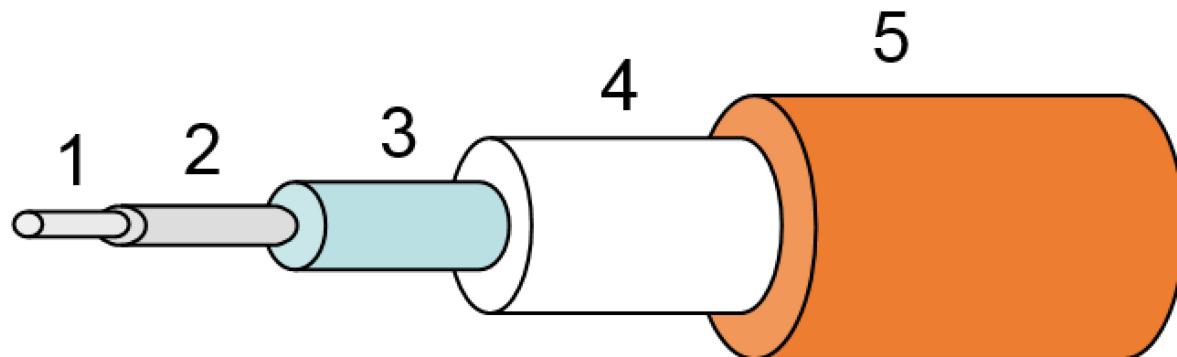

Key

- 1 Core
- 2 Cladding
- 3 Primary coating
- 4 Primary buffer
- 5 Cable jacket

iTeh STANDARD PREVIEW (standards.iteh.ai)

Table 1
SIST EN 4641-200:2019

Property	Value
Mode field diameter	1 310 nm: $(9,0 \pm 0,5) \mu\text{m}$ 1 550 nm: $(10,1 \pm 0,6) \mu\text{m}$
Cladding	$(125 \pm 1,0) \mu\text{m}$
Primary Coating diameter	$(250 \pm 10) \mu\text{m}$
Core/Cladding concentricity	$\leq 0,5 \mu\text{m}$
Cladding non-circularity	$\leq 0,7 \%$
Coating/Cladding concentricity	$\leq 10 \mu\text{m}$
Finished cable diameter	$(0,9 \pm 0,06) \text{ mm}$
Cable mass	$1,0 \pm 0,2 \text{ g/m}$
Operating temperature	- 65 °C to 150 °C
Fibre cut-off wavelength	$\leq 1,260 \text{ nm}$
Minimum bend radius (20 °C)	Installation: 4 mm Long term: 6 mm Storage: 18 mm (20 x cable outside diameter)
Fibre tensile strength	> 200 N

6 Materials

See Table 2.

Table 2

Element		Material
Fibre	Core	Silica
	Cladding	
Primary coating		Polyacrylate
Primary buffer		PTFE
Cable jacket		Polyimide

7 Test methods and performances

7.1 Tests in accordance with EN 3745-100

7.1.1 Optical fibre

See Table 3.

iTech STANDARD PREVIEW

Test method EN 3745-	Designation of test https://standards.itech.ai/catalog/standards/sist/57282781-cd26-4f16-9cd8-0051eb97125/sist-en-4641-200-100	Test conditions and results
201	Visual examination	SIST EN 4641-200:2019 Pass
IEC 60793-1-45	Fibre Mode Field Diameter (MFD)	MFD: $(9,0 \pm 0,5) \mu\text{m}$
501	Optical fibre proof test	> 1 %
301 Method D	Fibre attenuation	Maximum attenuation $\leq 0,5 \text{ dB/km}$ at 1 310 nm, $\leq 0,4 \text{ dB/km}$ at 1 550 nm at 20 °C Minimum sample length: $\geq 100 \text{ m}$

7.1.2 Fibre optic cable

See Table 4.

Table 4 — Fibre optic cable performance requirements (1 of 4)

Test method EN 3745-	Designation of test	Test conditions and results
201	Visual examination	The cable outer layer shall be continuous and free of visible defects such as lumps, abrasions, cracks, splits or blisters Number of sample: 1 Sample length: 3 m.
203	Buffer diameter	(245 ± 10) µm
203	Outer jacket outside diameter	(915 ± 60) µm
205 Method A	Longitudinal stability	Change in longitudinal dimensions between A and B: ≤ 7 mm. Number of samples: 3 Sample length: (2 ± 0,05) m Perform Temperature Cycling – Test Method 3745-402 – 25 Cycles
301 Method D	Cable attenuation	Maximum attenuation ≤ 0,50 dB/km at 1 310 nm, ≤ 0,40 dB/km at 1 550 nm at 20 °C. Minimum sample length: ≥ 100 m
305	Cable immunity to ambient light	Not applicable due to installation application
306/402	Attenuation during temperature cycling SIST EN 4641-200:2019	Visual examination in accordance with EN 3745-201 Maximum variation of attenuation: $\Delta\alpha \leq 0,25$ dB at 1 310 nm Test method EN 3745-402 – 10 cycles High temperature: 150 °C Low temperature: – 65 °C Duration at extreme temperatures: 30 min Rate of change: 5 °C per minute Number of samples: 3 – Sample length: ≥ 3 m
401	Cable accelerated aging	Visual examination in accordance with EN 3745-201 Maximum variation in attenuation at 1 310 nm Maximum variation in attenuation after 24 h: $\Delta\alpha \leq 0,10$ dB Residual maximum variation in attenuation: $\leq \Delta\alpha 0,10$ dB Mandrel diameter: 18 mm Test temperature: 150 °C – Number of temperature cycles: 1 Number of samples: 1 – Sample length: (2 ± 0,10) m
404	Thermal shock	Visual examination in accordance with EN 3745-201 Maximum permissible variation in attenuation during test sequence and after 24h: $\Delta\alpha \leq 0,25$ dB at 1 310 nm. High temperature: 150 °C Low temperature: – 65 °C Duration at extreme temperatures: 30 min Number of samples: 3 Sample length: ≥ 3 m Number of temperature cycles: 10
405	Low/High Temperature Bend	Not applicable due to installation application.