
Določanje lastnosti samovžiga usedlih plasti prahu

Determination of the spontaneous ignition behaviour of dust accumulations

Bestimmung des Selbstentzündungsverhaltens von Staubschüttungen

Détermination de l'aptitude à l'auto-inflammation des accumulations de poussières

Ta slovenski standard je istoveten z: prEN 15188

<https://standards.iteh.ai/catalog/standards/sist/3f4f2a56-1e1b-4e81-9f41-da62a88c96bb/sist-en-15188-2021>

ICS:

13.220.40	Sposobnost vžiga in obnašanje materialov in proizvodov pri gorenju	Ignitability and burning behaviour of materials and products
13.230	Varstvo pred eksplozijo	Explosion protection

oSIST prEN 15188:2019**en,fr,de**

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 15188

April 2019

ICS 13.230

Will supersede EN 15188:2007

English Version

Determination of the spontaneous ignition behaviour of dust accumulations

Détermination de l'aptitude à l'auto-inflammation des
accumulations de poussières

Bestimmung des Selbstentzündungsverhaltens von
Staubschüttungen

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 305.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents

Page

European foreword.....	4
Introduction	5
1 Scope.....	6
2 Normative References	6
3 Terms and definitions	6
4 Test apparatus.....	7
4.1 Sample baskets.....	7
4.2 Oven and test conditions	8
4.3 Thermocouples	9
4.4 Temperature recording equipment	9
5 Preparation of dust samples	9
6 Procedure.....	10
6.1 Experimental Procedure	10
6.2 Evaluation of tests.....	11
6.3 Calibration of thermocouples.....	12
7 Test report.....	12
8 Precision.....	13
8.1 General.....	13
8.2 Extrapolation of results	13
8.3 Single-basket-test (10 cm basket).....	14
Annex A (normative) Theoretical Basis to Determinations and Extrapolations.....	15
A.1 Introduction	15
A.2 Methods based on the thermal explosion theory	15
A.3 Modification to theory for realistic boundary conditions.....	17
A.4 Limitations to Analysis by Thermal Explosion Theory	19
A.5 Scaling Plot (Pseudo-Arrhenius plot)	19
Annex B (informative) Extrapolation of induction times	21
Annex C (informative) Extrapolation to Temperatures or Volumes of Interest by Numerical solution of Fourier's equation	23
C.1 Numerical solution of Fourier's equation	23
Annex D (informative) Alternative method for running tests adiabatically and interpreting the results.....	26
D.1 Summary and justification.....	26
D.2 Experimental Set-up.....	26
D.3 Experimental procedure	26
D.4 Evaluation of tests.....	27
Annex E (normative) Safety Precautions	30

E.1	General	30
E.2	General precautions:	30
Annex F (informative)	Significant Changes between this European Standard and EN 15188:2007	31
(informative)	Relationship between this European Standard and the essential requirements of Directive 2014/34/EU aimed to be covered.....	33
Bibliography		34

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 15188:2021

<https://standards.iteh.ai/catalog/standards/sist/3f4f2a56-1e1b-4e81-9f41-da62a88c96bb/sist-en-15188-2021>

prEN 15188:2019 (E)**European foreword**

This document (prEN 15188:2019) has been prepared by Technical Committee CEN/TC 305 “Potentially explosive atmospheres – Explosion prevention and protection”, the secretariat of which is held by DIN.

This document is currently submitted to the CEN Enquiry.

This document will supersede EN 15188:2007.

This document has been prepared under a standardization request given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive 2014/34/EU.

For relationship with EU Directive 2014/34 EU, see informative Annex ZA, which is an integral part of this document.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 15188:2021

<https://standards.iteh.ai/catalog/standards/sist/3f4f2a56-1e1b-4e81-9f41-da62a88c96bb/sist-en-15188-2021>

Introduction

The self-ignition behaviour of dusts and granular materials and their mixtures depends on their chemical composition as well as on related substance properties. It also depends on the size and geometry of the body of material, and, last but not least on the ambient temperature.

The reason for self-heating (or possibly self-ignition) is that the surface molecules of combustible dust or granular materials undergo exothermic reactions with air or other oxidising atmospheres transported into the void volume between the particles even at normal temperatures. Any heat then released will cause the temperature of the reactive system to rise, thus accelerating the reaction of additional molecules with oxygen, etc. A heat balance involving the heat produced inside the bulk (quantity and surface of reactive surface molecules, specific heat producing rate) and the heat loss to the surroundings (heat conductivity and dimension of the bulk, heat transfer coefficient on the outside surface of the bulk and the size of the latter) is decisive as to whether a steady-state temperature is reached at a slightly higher temperature level (the heat loss terms are larger than the heat production term), or whether temperatures in the bulk will continue to rise up to self-ignition of the material, if heat transport away from the system is insufficient (in this case the heat production term is larger than all heat losses).

The experimental basis for describing the self-ignition behaviour of a given dust or granular material is the determination of the self-ignition temperatures (T_{SI}) of differently-sized bulk volumes by isoperibolic hot storage experiments (storage at constant oven temperatures) in commercially available ovens. The results thus measured reflect the dependence of self-ignition temperatures upon volume of the accumulation.

Different evaluation procedures – described in Annex A – allow interpolation and extrapolation, to characterize the self-ignition behaviour of deposits of a different scale and of a different bulk geometric shapes. Primary method is the evaluation based on the thermal explosion theory according to Frank-Kamenetskii (Annex A.2) and Thomas (Clause A.3).

Interlaboratory tests have shown, that it is necessary to provide prescribed test conditions, e.g. by installation of a mesh wire screen into the oven, surrounding the dust samples and the thermocouples. In this way the spread of results will be minimized. If it is possible based on suitable thermo-analytic test procedures (adiabatic, isothermal or dynamic tests) to derive a reliable formal kinetic model, which describes the heat production of the substance as a function of temperature, then the volume dependency of the self-ignition temperature may be calculated according to the methods described in Annex A.

1 Scope

This document specifies analysis and evaluation procedures for determining self-ignition temperatures (T_{SI}) of combustible dusts or granular materials as a function of volume by hot storage experiments in ovens of constant temperature. The specified test method is applicable to any solid material for which the thermal explosion theory according to Annex A.2 holds (i.e. not limited to only oxidatively unstable materials).

The specified test is applicable to any dust or granular material that reacts primarily with oxygen from the air. For safety reasons, this test shall not be used with materials mixed with solid/liquid oxidant (e.g. gunpowder, thermites, wood impregnated with liquid oxygen) or materials that could undergo violent non-oxidative reactions (e.g. peroxides, explosives). On a case by case basis, some types of materials undergoing non-oxidative reactions (e.g. non-violent exothermic decomposition reactions) may be however tested provided that additional safety precautions are taken. Where any doubt exists about the existence of hazard due to the properties of the test material (e.g. toxic or explosive), expert advice should be sought.

This document is not applicable to the ignition of dust layers or bulk solids under aerated conditions (e.g. as in fluid bed dryer).

2 Normative References

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1127-1, *Explosive atmospheres - Explosion prevention and protection - Part 1: Basic concepts and methodology*

EN 13237, *Potentially explosive atmospheres - Terms and definitions for equipment and protective systems intended for use in potentially explosive atmospheres*

3 Terms and definitions

For the purposes of this document, for the purposes of this document, the terms and definitions given in EN 13237, EN 1127-1 and the following apply.

3.1 self-ignition temperature

T_{SI}
highest temperature at which a given volume of dust just does not ignite

NOTE Self-ignition temperature is expressed in °C.

3.2 oven temperature

arithmetic mean of the measured values of two thermocouples, both freely-installed in an oven at a distance of 5 cm to the surface of the dust sample

NOTE Oven temperature is expressed in °C.

3.3 sample temperature

temperature measured at the centre of the dust sample using a thermocouple

NOTE Sample temperature is expressed in °C.

3.4**induction time**

interval of time between reaching the storage temperature and start of ignition (defined by the inflection point, see Figure 3 case C)

NOTE Induction time is expressed in h.

3.5**ignition**

initiation of combustion

[EN ISO 19353:2016, 3.20]

3.6**bulk density**

sample mass divided by the determined volume of the basket

3.7**dust**

finely divided solid particles, up to 500 µm in nominal size

3.8**granules**

discrete particles larger than 500 µm

4 Test apparatus**4.1 Sample baskets**

The samples shall be loosely filled into mesh wire baskets of different volumes. The baskets shall be open at the top and closed at the bottom. They shall consist of two layers of narrow-meshed wire net, made of e.g. stainless steel. The width of the mesh for the inner sample container shall be chosen in such a way that the dust cannot fall through the mesh, but the diffusion of the oven air into the dust sample is not hindered (e.g. mesh opening of 0.05 mm). The outer basket should be made from coarser mesh wire (e.g. mesh opening of 0,5 mm). The outer basket defines the test volume therefore the inner basket should be tightly fitting within, such that it does not distort when inserted. Recommended shapes of the mesh wire baskets are that of a cube, or that of a cylinder with a height to diameter ratio of 1.

To allow an assessment of the self-ignition behaviour of larger sizes of dust accumulations than the laboratory-scale, by extrapolation, at least four mesh wire baskets of different volumes shall be used for the tests.

The smallest volume should normally be in the order of 100 cm³ and the largest should normally not be smaller than approximately 1 000 cm³. The volume ratio of the baskets should be approx. 1:1.7:5:8; e.g. cubes with edge length of 5 cm, 6 cm, 8,5 cm and 10 cm.

NOTE 1 Larger baskets are acceptable when sufficient material is available.

If only a limited amount of sample material is available, even smaller baskets may be used.

NOTE 2 For the sake of comparing products with respect to their self-ignition behaviour in devices or apparatus, where the sizes of the dust accumulations are limited for the reason of a specific design, often the determination of the self-ignition temperature for a basket of 400 cm³ or 1 000 cm³ is sufficient.

The volume of the sample baskets shall be determined by using suitable material consisting of sufficiently small particles of spherical shape having a smooth surface and therefore of a known and stable bulk density, e.g. glass beads with a diameter of approx. 0,3 mm. The baskets are filled with the suitable material; any surplus material

from the upper margin shall be removed. The basket is weighted before and after filling. The volume results from the weight of the filled in material with known bulk density (mean value of at least two measurements).


4.2 Oven and test conditions

Commercially available ovens (natural and forced convection) can be used. They shall have an air inlet opening in the lower section and an air outlet opening in the upper section and should be controllable in a temperature range from 35 °C to 300 °C. After reaching the test temperature the oven temperature shall be stable over time within a range of ± 1 K.

The temperature field surrounding the sample shall exhibit maximum spatial temperature differences of 4 K at an oven temperature of 120 °C. To determine the differences the temperature shall be measured on 6 sides of a 10 cm sample cube in a distance of 5 cm, respectively. This measurement shall be performed after installing the set-up and if the set-up (including hot storage oven) is changed. The measurement shall be repeated once a year.

To achieve these conditions a mesh wire screen shall be installed into the oven. The minimum distance between the screen and the oven walls shall be 5 cm. The screen consists of mesh wire with mesh opening of e.g. 0,5 mm. The screen shall be equipped with a front door and a sample holder, see Figure 1. The sample baskets shall freely hang in the oven. Additional metal sheets (thickness 0,25 mm to 0,5 mm) can be installed at half height and on top to protect the sample from radiation. The width of the sheets shall be chosen in such a way, that the largest sample basket, hanging in the screen, is covered.

For measuring the oven temperature two thermocouples have to be installed on opposite sides at a distance of 5 cm to the sample. The thermocouples have to be re-positioned for sample baskets of differing sizes. The minimum distance between the thermocouples and the wall of the screen is 2,5 cm, see Figure 2.

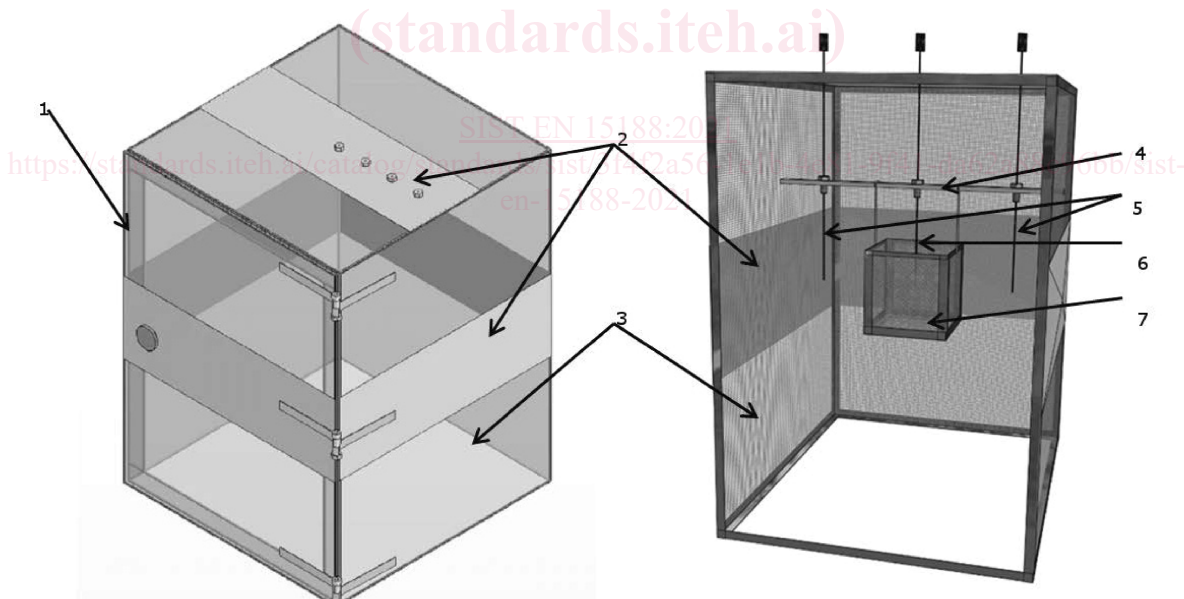

Key

- | | |
|---------------------------|--|
| 1 front door | 5 thermocouples for measuring oven temperature |
| 2 metal sheets (optional) | 6 thermocouples for measuring sample temperature |
| 3 mesh wire | 7 mesh wire container with dust sample |
| 4 sample holder | |

Figure 1 — Mesh wire screen to be installed into the heating oven

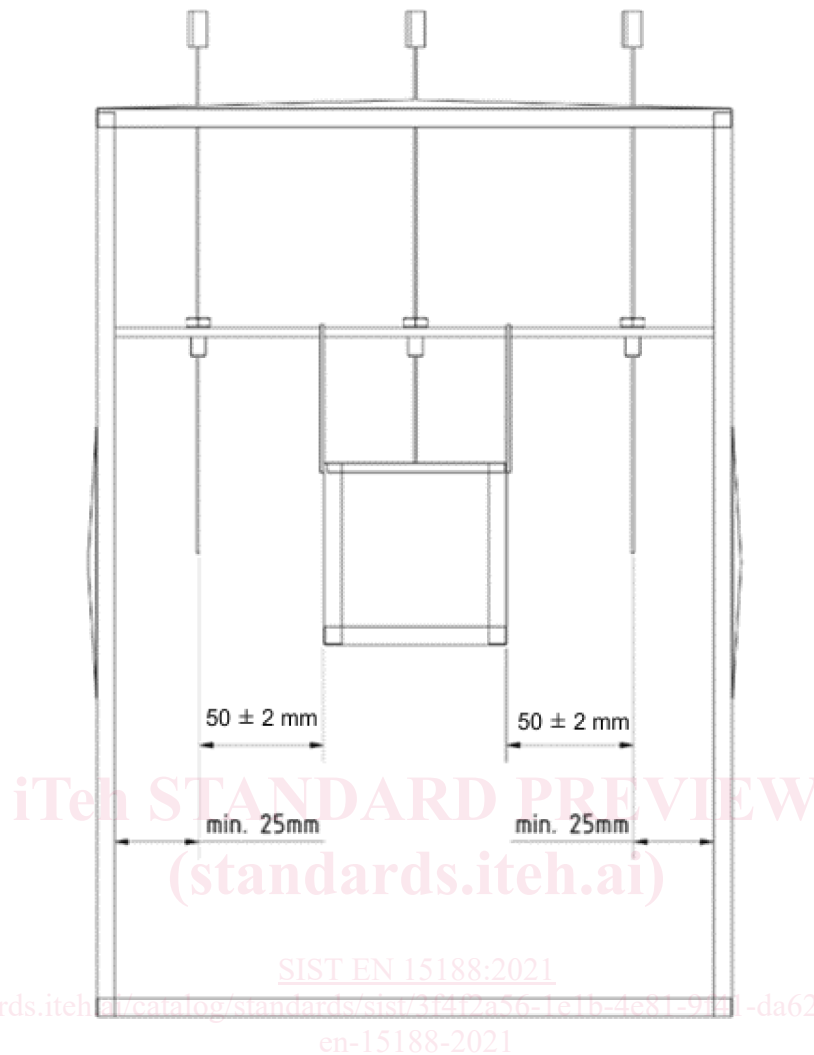


Figure 2 — Position of sample and thermocouples

Alternative test arrangements can be used to provide the specified test conditions.

4.3 Thermocouples

Both for measuring the sample temperature as well as for measuring the oven temperature, sheathed thermocouples with an external diameter of e.g. 1 mm are recommended.

4.4 Temperature recording equipment

Appropriate data acquisition may be used for measuring and recording signals of the thermocouples.

5 Preparation of dust samples

To investigate situations occurring in practice a representative sample should be used (produced by the operating conditions of the process). The sample characteristics shall be recorded in the test report.

The bulk density of the sample should be adjusted to the respective practical conditions (if known).

The bulk density shall be determined in the baskets and shall not vary by more than $\pm 2 \%$ in the test series.

6 Procedure

6.1 Experimental Procedure

The test basket shall be filled with the dust sample with the settled bulk density. Any surplus dust from the upper margin shall be removed. It shall be checked by weighting if the settled bulk density is reached with an accuracy of $\pm 2\%$. Position the basket at the centre of the oven (see Figure 1) that has been preheated to the test temperature.

NOTE It is also possible to position the basket at the centre of cold oven if the target oven temperature is reached and is stable within 30 min.

The thermocouple for measuring the sample temperature is to be positioned with its hot junction directly at the centre of the sample. The hot junctions of two additional thermocouples on opposite sides will be freely installed in the air space at a distance of 5 cm to the sample (see Figure 2). These two thermocouples are used to measure the oven temperature, corresponding to, in critical cases, the T_{SI} . The temperatures of these three thermocouples shall be recorded continuously over time.

In cases where the sample ignites the oven temperature may increase due to the heat released by the burning sample. To prevent misinterpretation the oven temperature shall be taken at the crossing point (where the temperature of the sample first reaches, and is equal to, the oven temperature) for the evaluation of the test.

The temperature difference of both thermocouples measuring the oven temperature shall not exceed 2 K. If a larger temperature difference is observed the calibration of thermocouples and, if necessary, the spatial temperature differences around the sample shall be checked.

The air inlet and air outlet openings of the oven shall be left open during the test to enable fresh air to enter and combustion gases to leave the oven. A sufficient number of hot storage tests – with a fresh dust sample for each test – shall be carried out to determine the highest oven temperature at which no ignition occurs, as well as the lowest oven temperature at which the dust sample showed an ignition for each sample volume chosen. Normally the test can be stopped if the temperature in the sample falls (see case B in Figure 3) or if a situation like case C in Figure 3 occurs. Striking features during testing (e.g. production of gases, physical changes to the sample) and the mass loss from samples shall be written down.

Figure 3 is an idealised one. In some cases, the type B curve is followed by a steep increase of sample temperature after the temperature drop has occurred. Attention should be paid to the fact that this may happen after significantly long periods of time. In such cases, such modified type B curves shall be evaluated as type C ones. This situation may also occur with type A curves.