This document is not an ASTM standard and is intended only to provide the user of an ASTM standard an indication of what changes have been made to the previous version. Because it may not be technically possible to adequately depict all changes accurately, ASTM recommends that users consult prior editions as appropriate. In all cases only the current version of the standard as published by ASTM is to be considered the official document.



Designation: F109-04 Designation: F 109 - 04 (Reapproved 2009)

Standard Terminology Relating to Surface Imperfections on Ceramics¹

This standard is issued under the fixed designation F 109; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This terminology describes and illustrates imperfections observed on whitewares and related products. For additional definitions of terms relating to whitewares and related products, refer to Terminology C 242. To observe these defects, examination shall be performed visually, with or without the aid of a dye penetrant, as described in Test Method C 949. Agreement by the manufacturer and the purchaser regarding specific techniques of observation is strongly recommended.

2. Referenced Documents

2.1 ASTM Standards:²

C 242 Terminology of Ceramic Whitewares and Related Products C949–<u>949</u> Test Method for Porosity in Vitreous Whitewares by Dye Penetration E165 Practicefor Liquid Penetrant Inspection Method<u>165 Test Method for Liquid Penetrant Examination</u>

3. Terminology

blemish-strained or discolored area attributable to normal composition or forming, or both. (See also inclusion .)



blister—bubble or gaseous inclusion at the surface which if broken could form a pit, pock, or hole.



burr—fragment of excess material or foreign particle adhering to the surface.

camber-a single arch of curvature. (See also waviness.)


Copyright © ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States.

¹ This terminology is under the jurisdiction of ASTM Committee C21 on Ceramic Whitewares and Related Products and is the direct responsibility of C21.01 Editorial and Teminology on Nomenclature.


Current edition approved MayJan. 1, 2004-2009. Published June 2004. February 2009. Originally approved in 1969. Last previous edition approved 20012004 as F109-91(2001). F 109 - 04.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For Annual Book of ASTM Standards volume information, refer to the standard's Document Summary page on the ASTM website.

∰ F 109 – 04 (2009)



chip—area along an edge or corner where the material has broken off.




where:

w = widthl = length, and

d = depth.

closed chip-fractured area on the edge or corner when the material has not broken off (Syn. potential chip).

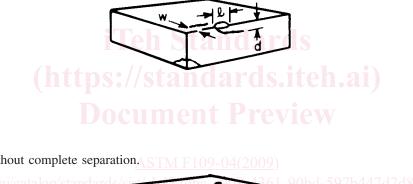


where: W = width


= length, and l

= depth. d

crack—line of fracture without complete separation. STM F109-04(2009)




crawling—a parting and contraction of the glaze on the surface of ceramic ware during drying or firing, resulting in unglazed areas bordered by coalesced glaze.



crazing—the cracking that occurs in fired glazes or other ceramic coatings as a result of tensile stresses, may also occur in the

surface portion of uncoated (unglazed) whiteware bodies.



fin-fine feather-edge protrusion from the surface (Syn. flash).




(https://standards.iteh.ai) Document Preview

ASTM F109-04(2009


https://standards.iteh.ai/catalog/standards/sist/ab434dbc-c909-4361-90bd-597b447d2d86/astm-f109-042009

F 109 – 04 (2009)

flow line—one or more streaks distinguished by a difference in light reflectance from the surrounding area, charateristic of injection-molded parts. (See also weld mark.)




grinding mark—a pattern of fine striations or scoring, usually directional, resulting from machining, as distinct from surface marks



hole—a deep depression or void, the bottom of which is not visible by normal (20/20) vision under 200 fc illumination.



inclusion—embedded foreign material or a stain other than from normal composition or forming, or both (see **blemish**). **kink**—a type of waviness occurring interior to the edges, not to be confused with the more abrupt departures as ridges or surface

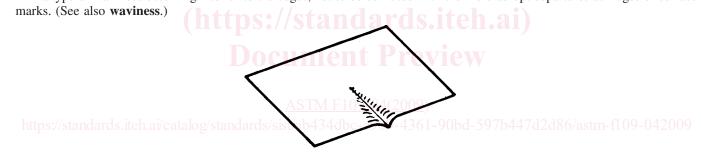

lump—a raised area on the surface having the appearance of being solid.