
**Intelligent transport systems —
Cooperative adaptive cruise control
systems (CACC) — Performance
requirements and test procedures**

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[ISO 20035:2019](#)

<https://standards.itih.ai/catalog/standards/iso/04cb71a7-ea69-4d29-aae6-7d26a480c942/iso-20035-2019>



iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 20035:2019](https://standards.iteh.ai/catalog/standards/iso/04cb71a7-ea69-4d29-aae6-7d26a480c942/iso-20035-2019)

<https://standards.iteh.ai/catalog/standards/iso/04cb71a7-ea69-4d29-aae6-7d26a480c942/iso-20035-2019>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Symbols and abbreviated terms	3
5 Classification	4
5.1 Type of CACC systems.....	4
5.2 Curve capabilities.....	4
5.3 Classes of on-board V2X devices.....	4
6 Requirements	5
6.1 V2V CACC.....	5
6.1.1 V2V CACC response.....	5
6.1.2 Region of interest.....	5
6.1.3 Potential Vehicle of Interest (PVOI).....	5
6.1.4 State transition diagram.....	6
6.1.5 Control operation strategy.....	7
6.1.6 V2V CACC data requirements.....	9
6.2 I2V CACC.....	10
6.2.1 Control Operation Strategy.....	10
6.2.2 I2V CACC data requirements.....	12
6.3 General operational control requirements.....	12
7 Performance evaluation test methods	12
7.1 V2V CACC.....	12
7.1.1 Communication range test.....	12
7.1.2 Accuracy test (lane and range discrimination tests).....	12
7.1.3 V2V cooperative operating modes/states tests.....	13
7.2 I2V CACC.....	15
7.2.1 Set speed test.....	15
7.2.2 Time fap test.....	16
7.3 Test environment conditions.....	16

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

ISO 20035:2019

<https://standards.iteh.ai/catalog/standards/iso/04cb71a7-ea69-4d29-aae6-7d26a480c942/iso-20035-2019>

Introduction

Cooperative Adaptive Cruise Control (CACC) system is an enhancement to the Adaptive Cruise Control (ACC) system by the addition of wireless communication with preceding vehicles and/or the infrastructure to augment the ACC active sensing capability. It uses active sensing data such as ranging to forward vehicle, subject vehicle data, over the air data from other surrounding vehicles and from infrastructure, and driver input to longitudinally control the vehicle via throttle and brake controls, and to convey the appropriate CACC status information to the driver (see [Figure 1](#)).

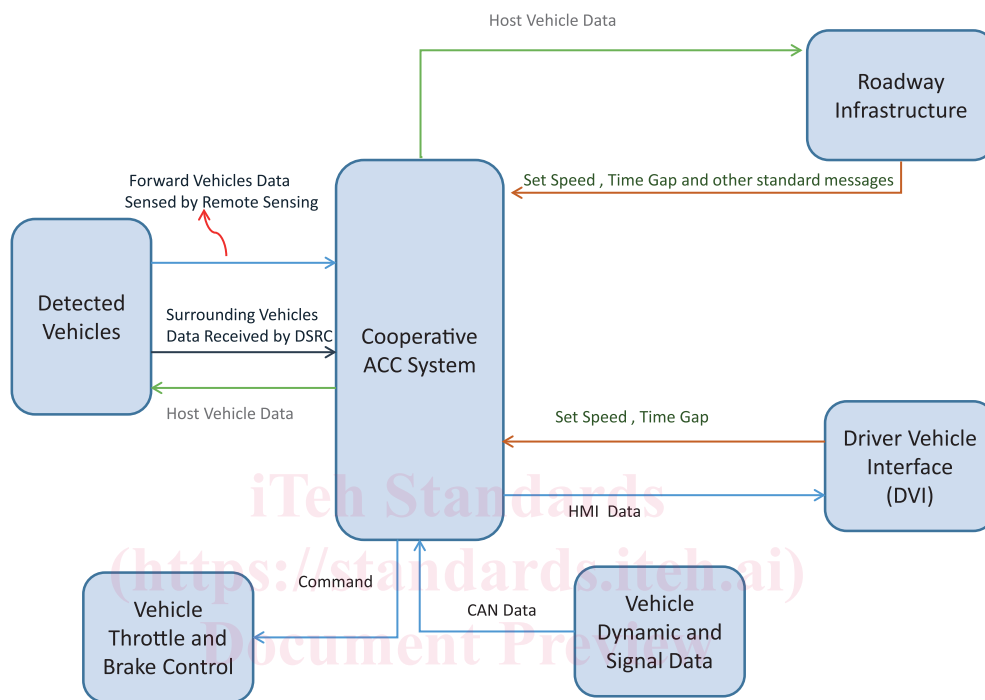


Figure 1 — Functional CACC elements

ACC systems can be made cooperative by adding vehicle-vehicle (V2V) and/or infrastructure-vehicle (I2V) communication capabilities and adjusting the performance of the system to make use of the information received via the communication system, e.g. Dedicated Short Range Communication System (DSRC) (see [Figure 2](#)).

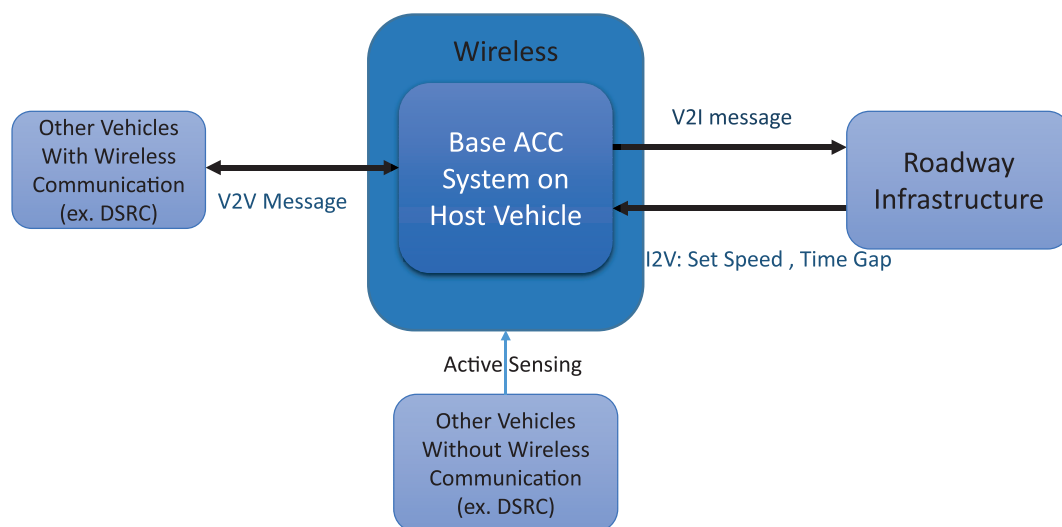


Figure 2 — CACC additions to ACC

The V2V communications can provide the ACC system with frequent updates about the speed, acceleration and commands (throttle and brake) of multiple vehicles driving in the surrounding area of the CACC-equipped vehicle. This enables the following performance improvements over ACC:

- higher-accuracy control of vehicle following gap, while maintaining smooth ride quality;
- significantly faster responses to speed changes by multiple forward vehicles, not only the vehicle immediately ahead of the subject vehicle;
- shorter vehicle-following gap settings, without compromising safety or driver confidence and comfort with the system.

These performance improvements produce the following benefits:

- increased driver confidence in the responsiveness of the system, leading to willingness to select shorter gap settings and use ACC under a wider range of traffic conditions;
- fewer cut-ins at the shorter gaps may make ACC acceptable to a wider range of drivers;
- significant damping of traffic flow disturbances, improving traffic flow dynamics and thereby reducing energy use and emissions;
- significant increase in the effective capacity (throughput) per lane of highway traffic.

The I2V communications can provide the ACC system with inputs from the local traffic management system, which determines the recommended values for set speed and vehicle-following gap. These can be used to enhance the effectiveness of traffic management strategies on limited access highways, where it is possible to determine the speed and gap settings that are likely to maximize the effective capacity of a bottleneck section. When the I2V CACC vehicles follow these recommended values, the overall traffic flow capacity can be optimized with a minimum of active intervention by the vehicle drivers (other than opting in to decide to follow the infrastructure-based guidance). This means that the driver of the subject vehicle gains a smoother trip, with less acceleration and braking and lower energy consumption, and the highway as a whole gains a higher effective capacity, reduced energy consumption and pollution, and reduced traffic delays.

[ISO 20035:2019](https://standards.iteh.ai/catalog/standards/iso/04cb71a7-ea69-4d29-aae6-7d26a480c942/iso-20035-2019)

<https://standards.iteh.ai/catalog/standards/iso/04cb71a7-ea69-4d29-aae6-7d26a480c942/iso-20035-2019>

Intelligent transport systems — Cooperative adaptive cruise control systems (CACC) — Performance requirements and test procedures

1 Scope

Cooperative Adaptive Cruise Control (CACC) system is an expansion to existing Adaptive Cruise Control (ACC) control strategy by using wireless communication with preceding vehicles (V2V) and/or the infrastructure (I2V). Both multi vehicle V2V data and I2V infrastructure data are within the scope of this document. When V2V data is used CACC can enable shorter time gaps and more accurate gap control, which can help increase traffic throughput and reduce fuel consumption. It can also receive data from the infrastructure, such as recommended speed and time gap setting, to improve traffic flow and safety.

This document addresses two types of Cooperative Adaptive Cruise Control (CACC): V2V, and I2V. Both types of CACC system require active sensing using for example radar, lidar, or camera systems. The combined V2V and I2V CACC is not addressed in this document. The following requirements are addressed in this document:

- classification of the types of CACC;
- definition of the performance requirements for each CACC type;
- CACC state transitions diagram;
- minimum set of wireless data requirements;
- test procedures.

CACC: <https://standards.iteh.ai/catalog/standards/iso/04cb71a7-ea69-4d29-aae6-7d26a480c942/iso-20035-2019>

- does only longitudinal vehicle speed control;
- uses time gap control strategy similar to ACC;
- has similar engagement criteria as ACC.

Coordinated strategies to control groups of vehicles, such as platooning, in which vehicle controllers base their control actions on how they affect other vehicles, and may have a very short following clearance gap are not within the scope of this document. CACC system operates under driver responsibility and supervision.

This document is applicable to motor vehicles including light vehicles and heavy vehicles.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 15622, *Intelligent transport systems — Adaptive cruise control systems — Performance requirements and test procedures*

3 Terms and definitions

For the purpose of this document, the following definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

active brake control

function which causes application of the brake(s), controlled by the CACC system not by the driver

3.2

Adaptive Cruise Control

ACC

enhancement to conventional cruise control systems [see Conventional Cruise Control (3.7)], which allows the subject vehicle to follow a forward vehicle at an appropriate distance proportional to the time gap set by the driver by controlling the engine and/or power train and potentially the brake

3.3

brake

part in which the forces opposing the movement of the vehicle develop and which may be a friction brake (when the forces are generated by friction between two parts of the vehicle moving relatively to one another); an electrical brake (when the forces are generated by electro-magnetic action between two parts of the vehicle moving relatively but not in contact with one another); a fluid brake (when the forces are generated by the action of a fluid situated between two parts of the vehicle moving relatively to one another); or an engine brake (when the forces are derived from an artificial increase in the braking action, transmitted to the wheels, of the engine)

Note 1 to entry: For the purposes of this document, transmission control devices are not considered as brakes.

[SOURCE: UN ECE Regulation 13-H:1998, 2.6] [ISO 20035:2019](https://standards.iteh.ai/catalog/standards/iso/04cb71a7-aa69-4d29-aae6-7d26a480c942/iso-20035-2019)

3.4 <https://standards.iteh.ai/catalog/standards/iso/04cb71a7-aa69-4d29-aae6-7d26a480c942/iso-20035-2019>

CACC system states

operation modes of the system presented in this document as three system states as shown in 6.1.4 and Figure 4

3.5

clearance

distance from the forward vehicle's trailing surface to the subject vehicle's leading surface

3.6

connected vehicle

any vehicle that has a V2X wireless communication system and broadcasts over the air standard message protocol

3.7

conventional cruise control

system capable of controlling the speed of a vehicle as set by the driver

3.8

forward vehicle

vehicle in front of and moving in the same direction and travelling on the same roadway as the subject vehicle

3.9

free-flowing traffic

smooth flowing and heavy traffic excluding stop and go and emergency braking situations

3.10**heavy vehicle category**

single vehicle or combination of vehicles defined as Category 1-2 or Category 2 in the United Nations Economic and Social Council World Forum for Harmonization of Vehicle Regulations (WP.29) TRANS/WP.29/1045

Note 1 to entry: A truck is in the heavy vehicle category.

3.11**Potential Vehicle of Interest****PVOI**

connected vehicle that exists in the V2V CACC region of interest, communicates with the subject vehicle, is of possible interest to the longitudinal control, and is not the target vehicle (TV)

3.12**region of interest****ROI**

area where PVOI and TV may exist and affect CACC system control operations

3.13**set speed**

desired travel speed, set by either the driver or by some control system that is external to the CACC system and which is the maximum desired speed of the vehicle while under CACC control

3.14**stationary object**

object in front of the subject vehicle which is stationary

3.15**steady state**

condition whereby the value of the described parameter does not change with respect to time, distance, etc.

3.16**subject vehicle****SV**

vehicle equipped with the system in question and related to the topic of discussion

3.17**target vehicle****TV**

vehicle that the subject vehicle follows which may or may not be equipped with a connected vehicle device

3.18**time gap**

τ

value calculated from vehicle speed v and clearance c by $\tau = c/v$

Note 1 to entry: to entry: v is the subject vehicle speed and c the distance between the subject vehicle and the forward vehicle.

4 Symbols and abbreviated terms

A	utilised area, general for area
A_t	illuminated surface
$a_{\text{lateral_max}}$	maximum allowed lateral acceleration in curves

- a_{min} minimum allowed longitudinal acceleration = Maximum allowed longitudinal deceleration
- a_{max} maximum allowed longitudinal acceleration
- a_{test} maximum allowed acceleration during curve test
- $a_{vehicle_max}$ maximum possible deceleration capability during manual driving
- CTT coefficient for Test Target for infrared reflectors
- c clearance, inter vehicle distance
- PVOI Potential Vehicle of Interest
- ROI region of interest
- TV target vehicle
- V2V vehicle to vehicle
- v the true subject vehicle speed over ground
- τ gap, time gap between vehicles

5 Classification

5.1 Type of CACC systems

Types of CACC are based on the type of the over the air data that may affect the longitudinal control of the vehicle. Two types of CACC systems are addressed in this document: V2V and I2V.

Table 1 — CACC system types

CACC type	Active sensing required	Wireless communication requirement (for example: DSRC is low latency, and 4G is higher latency)	Type of data affecting the longitudinal control
V2V	Yes	Low latency is minimum requirement	V2V over the air data
I2V	Yes	Some data can be broadcast using higher latency as appropriate to message urgency.	I2V over the air data

5.2 Curve capabilities

This document is applicable to CACC systems of different curve capabilities as specified in ISO 15622.

5.3 Classes of on-board V2X devices

Type A: OEM device that receives and processes vehicle CAN data.

Type B: OEM device that does not receive or process CAN data.

Type C: Non-OEM device that receives and processes CAN data.

Type D: Non OEM device that does not receive or process CAN data.