



Edition 1.2 2009-04 CONSOLIDATED VERSION

INTERNATIONAL STANDARD

NORME INTERNATIONALE

BASIC EMC PUBLICATION PUBLICATION FONDAMENTALE EN CEM

Electromagnetic compatibility (EMC) – Part 4-28: Testing and measurement techniques – Variation of power frequency, immunity test for equipment with input current not exceeding 16 A per phase

Compatibilité électromagnétique (CEM) –

Partie 4-28: Techniques d'essai et de mesure – Essai d'immunité à la variation de la fréquence d'alimentation pour des matériels avec un courant appelé n'excédant pas 16 A par phase 994240-3345-4341-866-a1740(03490a/ec-61000-4-28-1999)





THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office 3, rue de Varembé CH-1211 Geneva 20 Switzerland Tel.: +41 22 919 02 11 info@iec.ch www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and

once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

Centre: sales@iec.ch. atalog/standards/iec/9994a240-a345-43e1-86fb-a1740f03490a/iec-61000-4-28-1999

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC online collection - oc.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.





Edition 1.2 2009-04 CONSOLIDATED VERSION

INTERNATIONAL STANDARD

NORME INTERNATIONALE

BASIC EMC PUBLICATION PUBLICATION FONDAMENTALE EN CEM

Electromagnetic compatibility (EMC) – **Constant of** Part 4-28: Testing and measurement techniques – Variation of power frequency, immunity test for equipment with input current not exceeding 16 A per phase

Compatibilité électromagnétique (CEM) -

Partie 4-28: Techniques d'essai et de mesure – Essai d'immunité à la variation de la fréquence d'alimentation pour des matériels avec un courant appelé n'escédant pas 16 A par phase 994a240-a345-43e1-86fb-a1740f03490a/iec-61000-4-28-1999

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

ICS 33.100.20

ISBN 978-2-8891-0390-4

Warning! Make sure that you obtained this publication from an authorized distributor. Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

 Registered trademark of the International Electrotechnical Commission Marque déposée de la Commission Electrotechnique Internationale

CONTENTS

	FO	REWORD				
	INT	RODUCTION				
	1	Scope				
	2	Normative references				
	3	General7				
	4	Definitions7				
	5	Test levels				
	6	Test equipment				
		 6.1 Test generators: characteristics and performances				
	7	Test set-up				
	8	Test procedure				
		8.1 Climatic conditions				
		8.2 Execution of the test				
	9	Evaluation of test results11				
	10	Test report				
	Anr	nex A (informative) Sources and effects of variation of the power frequency				
	Anr	nex B (informative) Electromagnetic environment classes				
	Figure 1 – Frequency variation sequence					
	Fig	ure 2 – Example of transitional period <i>t</i> p12				
	Fig	ure 3 – Schema of test instrumentation with power amplifier				
		ure 4 – Example of test generator verification load9				
	Tab	ble 1 – Test levels for frequency variations				
		ble 2 – Characteristics of the generator				

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ELECTROMAGNETIC COMPATIBILITY (EMC) -

Part 4-28: Testing and measurement techniques – Variation of power frequency, immunity test for equipment with input current not exceeding 16 A per phase

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
 - 6) All users should ensure that they have the latest edition of this publication.
 - 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
 - 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
 - 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendments has been prepared for user convenience.

IEC 61000-4-28 edition 1.2 contains the first edition (1999) 77A/287/FDIS and 77A/299/ RVD], its amendment 1 (2001) 77B/291+293/FDIS and 77B/298+300/RVD] and its amendment 2 (2009) 77A/673/FDIS and 77A/676/RVD].

A vertical line in the margin shows where the base publication has been modified by amendments 1 and 2.

International Standard IEC 61000-4-28 has been prepared by subcommittee 77A: Low-frequency phenomena, of IEC technical committee 77: Electromagnetic compatibility.

This standard forms part 4-28 of the IEC 61000 series. It has the status of a basic EMC publication in accordance with IEC Guide 107.

Annexes A and B are for information only.

The committee has decided that the contents of the base publication and its amendments will remain unchanged until the maintenance result date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh Standards (https://standards.iteh.ai) Document Preview

IEC 61000-4-28:1999

https://standards.iteh.ai/catalog/standards/iec/9994a240-a345-43e1-86fb-a1740f03490a/iec-61000-4-28-1999

INTRODUCTION

IEC 61000 is published in separate parts according to the following structure:

Part 1: General

General considerations (introduction, fundamental principles) Definitions, terminology

Part 2: Environment

Description of the environment

Classification of the environment

Compatibility levels

Part 3: Limits

Emission limits

Immunity limits (in so far as they do not fall under the responsibility of the product committees)

Part 4: Testing and measurement techniques **Teh Standards**

Measurement techniques

Testing techniques

Part 5: Installation and mitigation guidelines

Installation guidelines

Mitigation methods and devices

https:/Part 6: Generic/standards/ards/iec/9994a240-a345-43e1-86fb-a1740f03490a/iec-61000-4-28-1999

Part 9: Miscellaneous

Each part is further subdivided into several parts, published either as International Standard, technical specifications or technical reports, some of which have already been published as sections. Others will be published with the part number followed by a dash and completed by a second number identifying the subdivision.

ELECTROMAGNETIC COMPATIBILITY (EMC) -

Part 4-28: Testing and measurement techniques – Variation of power frequency, immunity test for equipment with input current not exceeding 16 A per phase

1 Scope

This part of IEC 61000 is a basic EMC (electromagnetic compatibility) publication. It considers immunity tests for electric and/or electronic equipment in its electromagnetic environment. Only conducted phenomena are considered, including immunity tests for equipment connected to public and industrial networks.

The object of this part is to establish a reference for evaluating the immunity of electric and electronic equipment when subjected to variations of the power frequency.

This standard applies to electric and/or electronic equipment connected to 50 Hz or 60 Hz distributed network with rated line current up to 16 A per phase.

It does not apply to electric and/or electronic equipment connected to a.c. 400 Hz distribution networks. Tests concerning these networks will be covered by other IEC standards.

In general, electrical and electronic equipment is not susceptible to minor variations of the power frequency. Testing according to this standard should be limited to products which are assessed to be susceptible to power frequency variations by virtue of design, environment or failure consequences.

The immunity test levels required for a specific electromagnetic environment together with the performance criteria are indicated in the product, product family or generic standards as applicable.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050(161), International Electrotechnical Vocabulary (IEV) – Chapter 161 Electromagnetic compatibility

IEC 60068-1, Environmental testing – Part 1: General and guidance

IEC 61000-2-4, Electromagnetic compatibility (EMC) – Part 2: Environment – Section 4: Compatibility levels in industrial plants for low-frequency conducted disturbances 61000-4-28 © IEC:1999+A1:2001 +A2:2009

3 General

The purpose of the test is to investigate effects of power frequency variations on equipment which may be sensitive to this disturbance. The effects are generally instantaneous.

Electrical and electronic equipment may be affected by variations of the power frequency.

The frequency of a.c. power derived from public systems is directly related to the rotational speed of the generators, as is the frequency of a.c. power derived from an alternator which is separate from the public network. The frequency depends at any instant on the dynamic balance between the loads and the capacity of the generating plants. Consequently, as this dynamic balance changes, small changes in frequency will occur. The size and duration of these changes depends on the characteristics of the load changes and response of the generating plant to the load changes. Where the supply is derived from an independent inverter, the frequency may be derived from the control circuitry and is then fixed.

The frequency of public systems is, under normal conditions, generally declared by the supplier in terms of a nominal value (50 Hz or 60 Hz) with a small bandwidth within which these changes in frequency will normally be limited. However, in non-interconnected systems (small networks isolated like islands), variations of frequency are likely to be greater and consequently more important.

Frequency variations can affect

- control systems referring to time (measurement errors, loss of synchronization, etc.);
- equipment including passive filter (de-tuned).

4 Definitions

For the purposes of this part of IEC 61000, the following definitions and terms apply as well as the definitions of IEC 60050(161).

4.1

immunity

ability of a device, equipment or system to perform without degradation in the presence of an electromagnetic disturbance [IEV 161-01-20]

4.2

malfunction

termination of the ability of an equipment to carry out intended functions or the execution of unintended functions by the equipment

5 Test levels

The test is performed at nominal mains voltage.

The equipment under test (EUT) is initially in operation at a mains frequency f_1 and is then subjected to frequency variation sequence according to figure 1.

 $\Delta f/f_1$ is specified as a percentage of nominal frequency f_1 .

Test values are specified in table 1.

Test levels	Frequency variation $(\Delta f/f_1)$	Transitional period <i>t</i> _p
Level 1	No test required	No test required
Level 2	±3 %	10 s
Level 3	+4 % -6 %	10 s
Level 4	±15 %	1 s
Level X	Open	Open

Table 1 – Test levels for frequency variations

During the transitional period, t_p , (figure 2), the maximum change in frequency per cycle shall be less than 0,5 % of f_1 .

Levels 1 and 2 are specified for equipment in relation to class 1 and 2 in IEC 61000-2-4 respectively (see annex B).

Levels 3 and 4 are specified for equipment of which the misoperation is critical for specific application. These two test levels cover the frequency variations 100 % of the week.

Level 3 is specified for interconnected networks and level 4 is specified for non-interconnected networks.

X is an open test level. All of the levels can be proposed by a product committee, however, the value shall not be less than level 2 for equipment connected to public networks

NOTE The upper and the lower frequency operation limits defined by the product manufacturer should not, however, be exceeded.

EC 61000-4-28:1999

https://ftanTest.equipment_/standards/iec/9994a240-a345-43e1-86fb-a1740f03490a/iec-61000-4-28-1999

6.1 Test generators: characteristics and performances

The generator shall have provisions to prevent the emission of heavy disturbances which, if injected in the power supply network, may influence the test results.

Output voltage accuracy	±2 %	
Output voltage and current capability	The generator shall be able to supply enough voltage and current according to the type of EUT	
Phase accuracy for each phase	2° (0,5 % of 360°)	
Frequency accuracy	0,3 % of <i>f</i> ₁ (50 Hz or 60 Hz)	
Frequency capability range	f ₁ ± 20 %	
Test duration accuracy	±10 %	

Table 2 – Characteristics of the generator

61000-4-28 © IEC:1999+A1:2001 +A2:2009


6.2 Verification of the characteristics

It is recognized that there is a wide range of EUTs, and that consequently test generators with different output power capabilities may be utilized, as required by particular tests.

It shall be verified that the test generator meets the characteristics and performance specifications as listed in Table 2.

Performance of the test generator shall be verified with a resistive load drawing an r.m.s. current of no more than the output capability of the generator. For example, a 230V/16A generator shall be verified with a 14,3 Ω load.

In addition, the generator's output current capability shall be verified as being able to provide a crest factor of at least 3 when U_N is applied to a single phase load drawing an rms current of no more than the output capability of the generator. Each output phase of the generator shall be verified in turn. An example of a 230 V/16 A verification load is given in Figure 4.

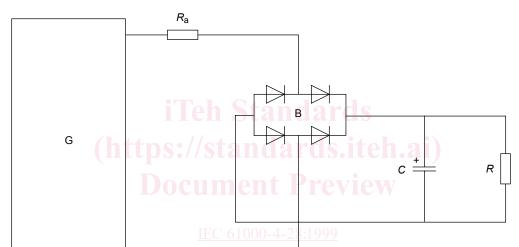

https://standards.iteh.ai/catalog/slandards/iec/9994a240-a345-43e1-86fb-a1740f03490a/iec-61000-4-28-1999

Components

- G Test generator
- B Bridge rectifier
- C 11 000 μ F \pm 20 % electrolytic capacitor
- R 61 $\Omega \pm 1$ % resistor
- R_a Additional resistor

NOTE R_a is selected so that the total series resistance (sum of the additional resistor R_a , the wiring resistance R_{wire} , the internal resistance of two conducting diodes R_{diodes} and the internal resistance of the capacitor R_c) is 92 m Ω (±10 %).

Figure 4 – Example of test generator verification load