
INTERNATIONAL STANDARD



1985

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION - МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ - ORGANISATION INTERNATIONALE DE NORMALISATION

**Test conditions for surface grinding machines with
vertical grinding wheel spindle and reciprocating
table — Testing of accuracy**

*Conditions d'essais des machines à rectifier les surfaces planes, à broche porte-meule à axe vertical —
Contrôle de la précision*

iTeh STANDARD PREVIEW

First edition — 1974-11-01

(standards.iteh.ai)

ISO 1985:1974

<https://standards.iteh.ai/catalog/standards/sist/f883b4f9-0bea-4d2c-b391-65fc208264b8/iso-1985-1974>

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

Prior to 1972, the results of the work of the technical Committees were published as ISO Recommendations; these documents are now in the process of being transformed into International Standards. As part of this process, Technical Committee ISO/TC 39 has reviewed ISO Recommendation R 1985 and found it suitable for transformation. International Standard ISO 1985 therefore replaces ISO Recommendation R 1985-1971.

<https://standards.iteh.ai/catalog/standards/sist/883b49-0bea-4d2c-b391-651c20826468/iso-1985-1974>

ISO Recommendation R 1985 was approved by the Member Bodies of the following countries :

Belgium	India	South Africa, Rep. of
Chile	Italy	Spain
Czechoslovakia	Japan	Sweden
Egypt, Arab Rep. of	Korea, Rep. of	Thailand
France	Netherlands	United Kingdom
Greece	New Zealand	U.S.A.
Hungary	Portugal	

The Member Bodies of the following countries expressed disapproval of the Recommendation on technical grounds :

Germany
Switzerland

No Member Body disapproved the transformation of ISO/R 1985 into an International Standard.

Test conditions for surface grinding machines with vertical grinding wheel spindle and reciprocating table – Testing of accuracy

iTeh STANDARD PREVIEW (standards.iteh.ai)

1 SCOPE AND FIELD OF APPLICATION

This International Standard describes, with reference to ISO/R 230, *Machine tool test code*, both geometrical and practical tests on general purpose and normal accuracy surface grinding machines with reciprocating table and vertical grinding wheel spindle, and the corresponding permissible deviations which apply.

It is not applicable to surface grinding machines with fixed or rotating tables or to machines having longitudinal traverse of the wheelhead.¹⁾

This International Standard deals only with the verification of accuracy of the machine. It does not apply to the testing of the running of the machine (vibrations, abnormal noises, stick-slip motion of components, etc.), or to machine characteristics (speeds, feeds, etc.) which should generally be checked before testing accuracy.

2 PRELIMINARY REMARKS

2.1 In this International Standard, all the dimensions are expressed in millimetres and in inches.

2.2 To apply this International Standard, reference should be made to ISO/R 230, especially for the installation of the

machine before testing, warming up of spindles and other moving parts, description of measuring methods and recommended accuracy of testing equipment.

2.3 The sequence in which the geometrical tests are given is related to the sub-assemblies of the machine and this in no way defines the practical order of testing. In order to make the mounting of instruments or gauging easier, tests may be applied in any order.

2.4 When inspecting a machine, it is not always necessary to carry out all the tests described in this International Standard. It is up to the user to choose, in agreement with the manufacturer, those tests relating to the properties which are of interest to him, but these tests are to be clearly stated when ordering a machine.

2.5 Practical tests should be made with finishing cuts.

2.6 When the tolerance is established for a measuring range different from that given in this International Standard (see sub-clause 2.311 in ISO/R 230), it should be taken into consideration that the minimum value of tolerance is 0,001 mm (0.000 04 in) for geometrical tests and practical tests.

1) For reasons of simplicity, the diagrams in this International Standard illustrate only one type of machine.

Permissible deviation		Measuring instruments	Observations and references to the test code ISO/R 230
mm	in		
<p>a) 0,02 up to 1000</p> <p>For each 1000 mm increase in length, add</p> <p>0,015</p> <p>Maximum permissible deviation :</p> <p>0,05</p>	<p>a) 0.0008 up to 40</p> <p>For each 40 in increase in length, add</p> <p>0.0006</p> <p>Maximum permissible deviation :</p> <p>0.002</p>	Precision levels, optical or other methods	<p>a) Clauses 3.11, 3.21, 5.212.21 and 5.212.22</p> <p>Measurements should be made at a number of positions equally spaced along the length of the slideways.</p> <p>For machines standing on three support points or having a table travel less than 1 500 mm (60 in) the table need not be removed. In this case the level should be placed successively on the exposed portions of the slideways and on the table. The table should be in its central position.</p>
<p>b) variation of level :</p> <p>0,02/1000</p>	<p>b) variation of level :</p> <p>0.0008/40</p>		<p>b) Clause 5.412.7</p> <p>A level should be placed transversely on the slideways, and measurements should be taken at a number of positions equally spaced along the length of the slideway. The variation of level measured at any position should not exceed the permissible deviation.</p>
<p>0,02 up to 1000</p> <p>For each 1000 mm increase in length, add</p> <p>0,02</p> <p>Maximum permissible deviation :</p> <p>0,05</p> <p>Local tolerance :</p> <p>0,01</p> <p>over any measuring length of 300</p>	<p>0.0008 up to 40</p> <p>For each 40 in increase in length, add</p> <p>0.0008</p> <p>Maximum permissible deviation :</p> <p>0.002</p> <p>Local tolerance :</p> <p>0.0004</p> <p>over any measuring length of 12</p>	Straightedge, support and dial gauge, or taut wire and microscope	<p>Clause 5.232.1</p> <p>The dial gauge should be fixed on a support A of a suitable form such that it can slide in the slideways with the stylus touching a straightedge laid parallel to the slideways.</p>
<p>0,01 up to 1000</p> <p>For each 1000 mm increase in length, add</p> <p>0,01</p> <p>Maximum permissible deviation :</p> <p>0,025</p>	<p>0.0004 up to 40</p> <p>For each 40 in increase in length, add</p> <p>0.0004</p> <p>Maximum permissible deviation :</p> <p>0.001</p>		<p>Clauses 5.232.1 or 5.212.3 – 5.232.2</p> <p>In alternative 1), the dial gauge support should be placed on a fixed part of the machine, the stylus touching a straightedge laid parallel to the general direction of the longitudinal movement of the table.</p>

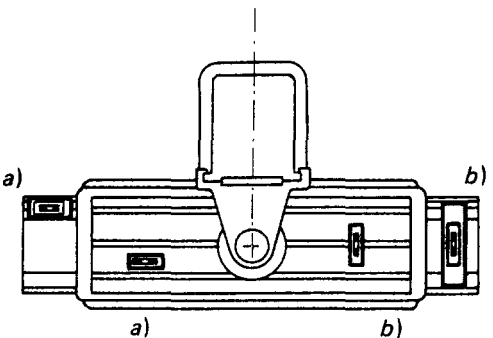

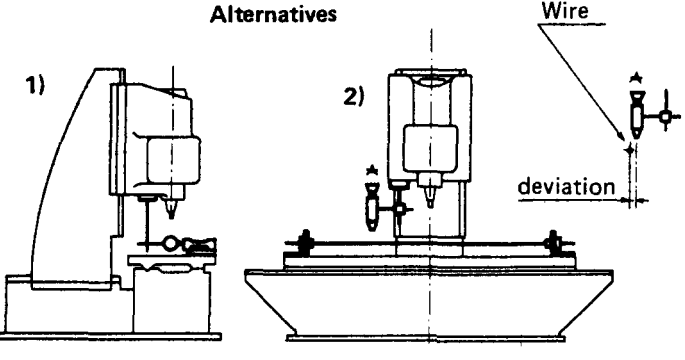
iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 1985:1974

<https://standards.iteh.ai/catalog/standards/sist/f883b4f9-0bea-4d2c-b391-65fc208264b8/iso-1985-1974>

3 TEST CONDITIONS AND PERMISSIBLE DEVIATIONS

3.1 Geometrical tests

No.	Diagram	Object
G 1		<p>Verification of levelling of slideways</p> <p>a) Longitudinal verification : Straightness of slideways in the vertical plane.</p> <p>b) Transverse verification : Slideways should be in the same plane.</p>
G 2		<p>ISO 1985:1974 https://standards.iteh.ai/catalog/standards/sist/f883b4f9-0bea-4d2c-b391-65fc208264b8/iso-1985-1974</p> <p>Verification of straightness of slideways in a horizontal plane. (Only for machines with cross movement of the table or the wheelhead.)</p>
G 2	<p>Alternatives</p> 	<p>(These alternatives are for small machines where the table is not to be dismantled.)</p> <p>Verification of the straightness of the longitudinal movement of the table.</p>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Permissible deviation		Measuring instruments	Observations and references to the test code ISO/R 230
mm	in		
0,01 up to 1000 For each 1000 mm increase in length, add 0,01 Maximum permissible deviation : 0,04 Local tolerance : 0,005 over any measuring length of 300	0.0004 up to 40 For each 40 in increase in length, add 0.0004 Maximum permissible deviation : 0.0016 Local tolerance : 0.0002 over any measuring length of 12	Straightedge and slip gauges or precision level	Clauses 5.322 and 5.323 The table should be positioned at the centre of travel. The table should not be locked.
0,01	0.0004	Dial gauge	Clauses 5.612.1 and 5.612.2 The stylus of the dial gauge should be set normal to the surface which is to be checked. Checking should be carried out at each extremity of the taper. This is not stated in the test code ISO/R 230.
0,01	0.0004	Dial gauge	Clauses 5.622.1 and 5.622.2 A force F , specified by the manufacturer of the machine, should be exerted coaxially with the spindle. The line of action of the stylus of the dial gauge should be co-axial with the spindle.
a) 0,015 up to 1000 For each 1000 mm increase in length, add 0,01 Maximum permissible deviation : 0,05 Local tolerance : 0,008 over any measuring length of 300 b) 0,01 up to 1000	a) 0.0006 up to 40 For each 40 in increase in length, add 0.0004 Maximum permissible deviation : 0.002 Local tolerance : 0.0003 over any measuring length of 12 b) 0.0004 up to 40	Dial gauge	Clause 5.422.21 Checking by direct contact with the table. If the spindle can be locked, the dial gauge may be mounted on it. If the spindle cannot be locked, the dial gauge should be placed on a fixed part of the machine. The stylus to be placed approximately in the wheel spindle axis.
a) 0,01 up to 1000 For each 1000 mm increase in length, add 0,005 Maximum permissible deviation : 0,035 b) 0,01 up to 1000	a) 0.0004 up to 40 For each 40 in increase in length, add 0.0002 Maximum permissible deviation : 0.0014 b) 0.0004 up to 40	Dial gauge and precision straightedge	Checking with a straightedge. It is unnecessary to follow the test code ISO/R 230. The checking should be made on a straightedge laid parallel to the table surface and placed in the direction of the movement concerned.

iTeh STANDARD PREVIEW
 (standards.iteh.ai)

ISO 1985:1974

<https://standards.iteh.ai/catalog/standards/sist/1883b4f9-0bea-4d2c-b991-65fc208264b8/iso-1985-1974>

No.	Diagram	Object
G 3		<p>Verification of flatness of the table surface.</p>
G 4		<p>Measurement of run-out of the wheel spindle nose.</p>
G 5		<p>Measurement of periodical axial slip of the wheel spindle.</p> <p>ISO 1985:1974 https://standards.itech.ai/catalog/standards/sist/f883b4f9-0bea-4d2c-b391-65fc208264b8/iso-1985-1974</p>
G 6		<p>Verification of parallelism of the table surface :</p> <p>a) to its longitudinal movement;</p> <p>b) to the transverse movement of the table or wheel spindle. (only for machines having this movement.)</p>

Permissible deviation		Measuring instruments	Observations and references to the test code ISO/R 230
mm	in		
a) 0,02/300 b) 0,02/300	a) 0.0008/12 b) 0.0008/12	Dial gauge and square	Clause 5.522.2 Clamp the wheelhead if possible when taking measurements. If the spindle can be locked, the dial gauge can be mounted on it. If the spindle cannot be locked, the dial gauge should be placed on a fixed part of the wheelhead.
a) 0,01/300* b) 0,01/300*	a) 0.0004/12* b) 0.0004/12*	Dial gauge	Clauses 5.512.1 and 5.512.42 Table in central position. Wheelhead clamped if possible. * Distance between the two points touched.
0,015 up to 1000 For each 1000 mm increase in length, add 0,01 Maximum permissible deviation : 0,05 Local tolerance : 0,008 over any measuring length of 300	0.0006 up to 40 For each 40 in increase in length, add 0.0004 Maximum permissible deviation : 0.002 Local tolerance : 0.0003 over any measuring length of 12	Dial gauge	Clauses 5.422.1 and 5.422.21 If the spindle can be locked, the dial gauge may be mounted on it. If the spindle cannot be locked, the dial gauge should be placed on a fixed part of the machine.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 1985-1974

Dial gauge

<https://standards.iteh.ai/catalog/standards/sist/1883b4f9-0bea-4d2c-b591-65fc208264b8/iso-1985-1974>

No.	Diagram	Object
G 7		<p>Verification of squareness and straightness of the vertical movement of the wheelhead to the table surface :</p> <p>a) in a longitudinal vertical plane;</p> <p>b) in a transverse vertical plane.</p>
G 8		<p>Verification of squareness of the axis of the wheel spindle to the table surface :</p> <p>a) in a longitudinal plane;</p> <p>b) in a transverse plane.</p> <p>(For machines which have no wheel spindle regulation in that plane.)</p>
G 9		<p>Verification of parallelism of the median or reference tee slot to the longitudinal movement of the table.</p> <p>(Only for machines having transverse movement of the wheelhead or the table.)</p>