
**Road vehicles — Diagnostic
communication over Controller Area
Network (DoCAN) —**

**Part 4:
Requirements for emissions-related
systems**

iTeh STANDARD PREVIEW

*Véhicules routiers — Diagnostic sur gestionnaire de réseau de
communication (DoCAN) —*

Partie 4: Exigences applicables aux systèmes associés aux émissions

<https://standards.iteh.ai/catalog/standards/sist/cd70c82d-7e83-427f-b743-5c791009945c/iso-15765-4-2016>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 15765-4:2016

<https://standards.iteh.ai/catalog/standards/sist/cd70c82d-7e83-427f-b743-5c791009945c/iso-15765-4-2016>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword.....	v
Introduction.....	vi
1 Scope.....	1
2 Normative references.....	1
3 Terms, definitions, symbols and abbreviated terms.....	2
3.1 Terms and definitions.....	2
3.2 Symbols.....	2
3.3 Abbreviated terms.....	2
4 Conventions.....	3
5 Document overview.....	3
6 External test equipment initialization sequence.....	4
6.1 General.....	4
6.2 Baudrate validation procedure.....	7
6.2.1 BaudrateRecord.....	7
6.2.2 Baudrate validation.....	7
6.2.3 External test equipment error detection provisions.....	9
6.3 CAN identifier validation procedure.....	9
6.3.1 CAN identifier validation procedure OBD.....	9
6.3.2 CAN identifier validation procedure WWH-OBD.....	11
7 Application layer.....	13
8 Session layer.....	14
9 Transport protocol layer.....	14
10 Network layer.....	14
10.1 General.....	14
10.2 Network layer parameters.....	14
10.2.1 Timing parameter values.....	14
10.2.2 Definition of Flow Control parameter values.....	15
10.2.3 Maximum number of legislated OBD/WWH-OBD ECUs.....	16
10.3 Addressing formats.....	17
10.3.1 Normal and fixed addressing format.....	17
10.3.2 Functional addressing.....	17
10.3.3 Physical addressing.....	17
10.4 CAN identifier requirements.....	18
10.4.1 External test equipment.....	18
10.4.2 Legislated OBD/WWH-OBD server/ECU.....	18
10.5 Mapping of diagnostic addresses.....	19
10.5.1 Legislated OBD/WWH-OBD CAN identifiers.....	19
10.5.2 11 bit CAN identifiers.....	19
10.5.3 29 bit CAN identifiers.....	20
10.6 Support of ECUNAME reporting.....	21
11 Data link layer.....	21
12 Physical layer.....	21
12.1 General.....	21
12.2 External test equipment baudrates.....	21
12.3 External test equipment CAN bit timing.....	21
12.3.1 CAN bit timing parameter values.....	21
12.3.2 Nominal baudrate 250 kBit/s.....	22
12.3.3 Nominal baudrate 500 kBit/s.....	23
12.4 External test equipment.....	23

12.4.1	General.....	23
12.4.2	CAN interface.....	24
12.4.3	External test equipment cable.....	26
Bibliography	27

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 15765-4:2016](https://standards.iteh.ai/catalog/standards/sist/cd70c82d-7e83-427f-b743-5c791009945c/iso-15765-4-2016)

<https://standards.iteh.ai/catalog/standards/sist/cd70c82d-7e83-427f-b743-5c791009945c/iso-15765-4-2016>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

ISO 15765-4:2016

This third edition cancels and replaces the second edition (ISO 15765-4:2011), which has been technically revised. It also incorporates the Amendment ISO 15765-4:2011/Amd 1:2013.

ISO 15765 consists of the following parts, under the general title *Road vehicles — Diagnostic communication over Controller Area Network (DoCAN)*¹⁾:

- Part 1: *General information and use case definition*
- Part 2: *Transport protocol and network layer services*
- Part 4: *Requirements for emissions-related systems*

1) ISO 15765-3 Implementation of unified diagnostic services (UDS on CAN) has been withdrawn and replaced by ISO 14229-3 Road vehicles — Unified diagnostic services (UDS) — Part 3: Unified diagnostic services on CAN implementation (UDSonCAN)

Introduction

This part of ISO 15765 has been established in order to define common requirements for vehicle diagnostic systems implemented on a Controller Area Network (CAN) communication link, as specified in ISO 11898. Although primarily intended for diagnostic systems, it also meets requirements from other CAN-based systems needing a network layer protocol.

To achieve this, it is based on the Open Systems Interconnection (OSI) Basic Reference Model, in accordance with ISO/IEC 7498-1 and ISO/IEC 10731, which structures communication systems into seven layers as shown in [Table 1](#).

Table 1 — Enhanced and legislated OBD diagnostic specifications applicable to the OSI layers

OSI 7 layers ^a	Vehicle-manufacturer-enhanced diagnostics	Legislated OBD (on-board diagnostics)	Legislated WWH-OBD (on-board diagnostics)
Application (layer 7)	ISO 14229-1, ISO 14229-3	ISO 15031-5	ISO 27145-3, ISO 14229-1
Presentation (layer 6)	Vehicle manufacturer specific	ISO 15031-2, ISO 15031-5, ISO 15031-6, SAE J1930-DA, SAE J1979-DA, SAE J2012-DA	ISO 27145-2, SAE 1930-DA, SAE J1979-DA, SAE J2012-DA, SAE J1939-DA (SPNs), SAE J1939-73 Appendix A (FMIs)
Session (layer 5)	ISO 14229-2		
Transport protocol (layer 4)	ISO 15765-2	ISO 15765-2	ISO 15765-4, ISO 15765-2
Network (layer 3)	ISO 11898-1	ISO 11898-1	ISO 15765-4, ISO 11898-1
Data link (layer 2)	ISO 11898-1, ISO 11898-2, ISO 11898-3, or vehicle manufacturer specific	ISO 11898-1, ISO 11898-2	ISO 15765-4, ISO 11898-1, ISO 11898-2
Physical (layer 1)			ISO 27145-4

^a 7 layers according to ISO/IEC 7498-1 and ISO/IEC 10731

The application layer services covered by ISO 14229-3 have been defined in compliance with diagnostic services established in ISO 14229-1 and ISO 15031-5, but are not limited to use only with them.

The transport protocol and network layer services covered by this part of ISO 15765 have been defined to be independent of the physical layer implemented, and a physical layer is only specified for legislated on-board diagnostics (OBD).

For other application areas, ISO 15765 can be used with any CAN physical layer.

Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) —

Part 4: Requirements for emissions-related systems

1 Scope

This part of ISO 15765 specifies requirements for Controller Area Networks (CAN) where one or more controllers comply with on-board diagnostics (OBD) or world-wide harmonized on-board diagnostics (WWH-OBD) regulations. The network presumes the use of an external test equipment for inspection and repair diagnostics, as defined by the regulations. The CAN network requirements for the vehicle and the external test equipment are based on the specifications of ISO 15765-2, ISO 11898-1 and ISO 11898-2.

This part of ISO 15765 places restrictions on those International Standards for the fulfilment of the regulations. It does not specify in-vehicle CAN bus architecture, but seeks to ensure that the vehicle's regulated CAN communications comply with external test equipment requirements.

This part of ISO 15765 defines the requirements to successfully establish, maintain and terminate communication with a vehicle that implements the requirements of the OBD/WWH-OBD regulations. Plug-and-play communication capabilities among vehicles and test equipment are defined to assure the interoperation of external test equipment and vehicles. This part of ISO 15765 details all of the OSI layer requirements to achieve this goal.

This part of ISO 15765 is the entry point for DoCAN (Diagnostic communication over Controller Area Network). Based on the results of the initialization, the external test equipment determines which protocol and diagnostic services are supported by the vehicle's emissions-related system:

- legislated OBD: ISO 15031 (all parts);
- legislated WWH-OBD: ISO 27145 (all parts).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 11898-1, *Road vehicles — Controller area network (CAN) — Part 1: Data link layer and physical signalling*

ISO 11898-2, *Road vehicles — Controller area network (CAN) — Part 2: High-speed medium access unit*

ISO 15031-5, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 5: Emissions-related diagnostic services*

ISO 15765-2, *Road vehicles — Diagnostic communication over Controller Area Networks (DoCAN) — Part 2: Transport protocol and network layer services*

ISO 27145-3, *Road vehicles — Implementation of World-Wide Harmonized On-Board Diagnostics (WWH-OBD) communication requirements — Part 3: Common message dictionary*

3 Terms, definitions, symbols and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 15765-2 apply.

3.2 Symbols

Symbol	Definition	Unit
C_{AC1}, C_{AC2}	capacitance of a.c. termination	F
C_{CAN_H}	capacitance between CAN_H and ground potential	F
C_{CAN_L}	capacitance between CAN_L and ground potential	F
C_{DIFF}	capacitance between CAN_H and CAN_L	F
Δf	oscillator tolerance	Hz
l_{CABLE}	maximum cable length between OBD/WWH-OBD connector and external test equipment	m
Prop_Seg	propagation segment	
Phase_Seg1	phase segment 1	
Phase_Seg2	phase segment 2	
R_{AC1}, R_{AC2}	resistance of a.c. termination	Ω
Sync_Seg	synchronization segment	
t_{BIT}	bit time	μs
t_{BIT_RX}	receive bit time	μs
t_{BIT_TX}	transmit bit time	μs
t_{CABLE}	external-test-equipment cable propagation delay (without external test equipment CAN interface delay)	μs
t_{SEG1}	timing segment 1	μs
t_{SEG2}	timing segment 2	μs
t_{SJW}	resynchronization jump width	μs
$t_{SYNCSEG}$	synchronization segment	μs
t_{TOOL}	external test equipment CAN interface propagation delay (without external test equipment cable delay)	μs
t_Q	time quantum	μs

3.3 Abbreviated terms

BS	block size
CAN	controller area networks
CF	consecutive frame
DLC	data length code
DoCAN	diagnostic communication over CAN
ECU	electronic control unit
ECM	engine control module
FC	flow control
FF	first frame
FS	flow status

OBD	on-board diagnostics
SA	source address
SF	single frame
SJW	synchronization jump width
SP	nominal sample point
TA	target address
TCM	transmission control module
WWH-OBD	world-wide harmonized on-board diagnostics

4 Conventions

ISO 15765 is based on the conventions specified in the OSI Service Conventions (ISO/IEC 10731:1994) as they apply for diagnostic services.

5 Document overview

[Figure 1](#) illustrates the most applicable application implementations utilizing the DoCAN protocol.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 15765-4:2016](#)

<https://standards.iteh.ai/catalog/standards/sist/cd70c82d-7e83-427f-b743-5c791009945c/iso-15765-4-2016>

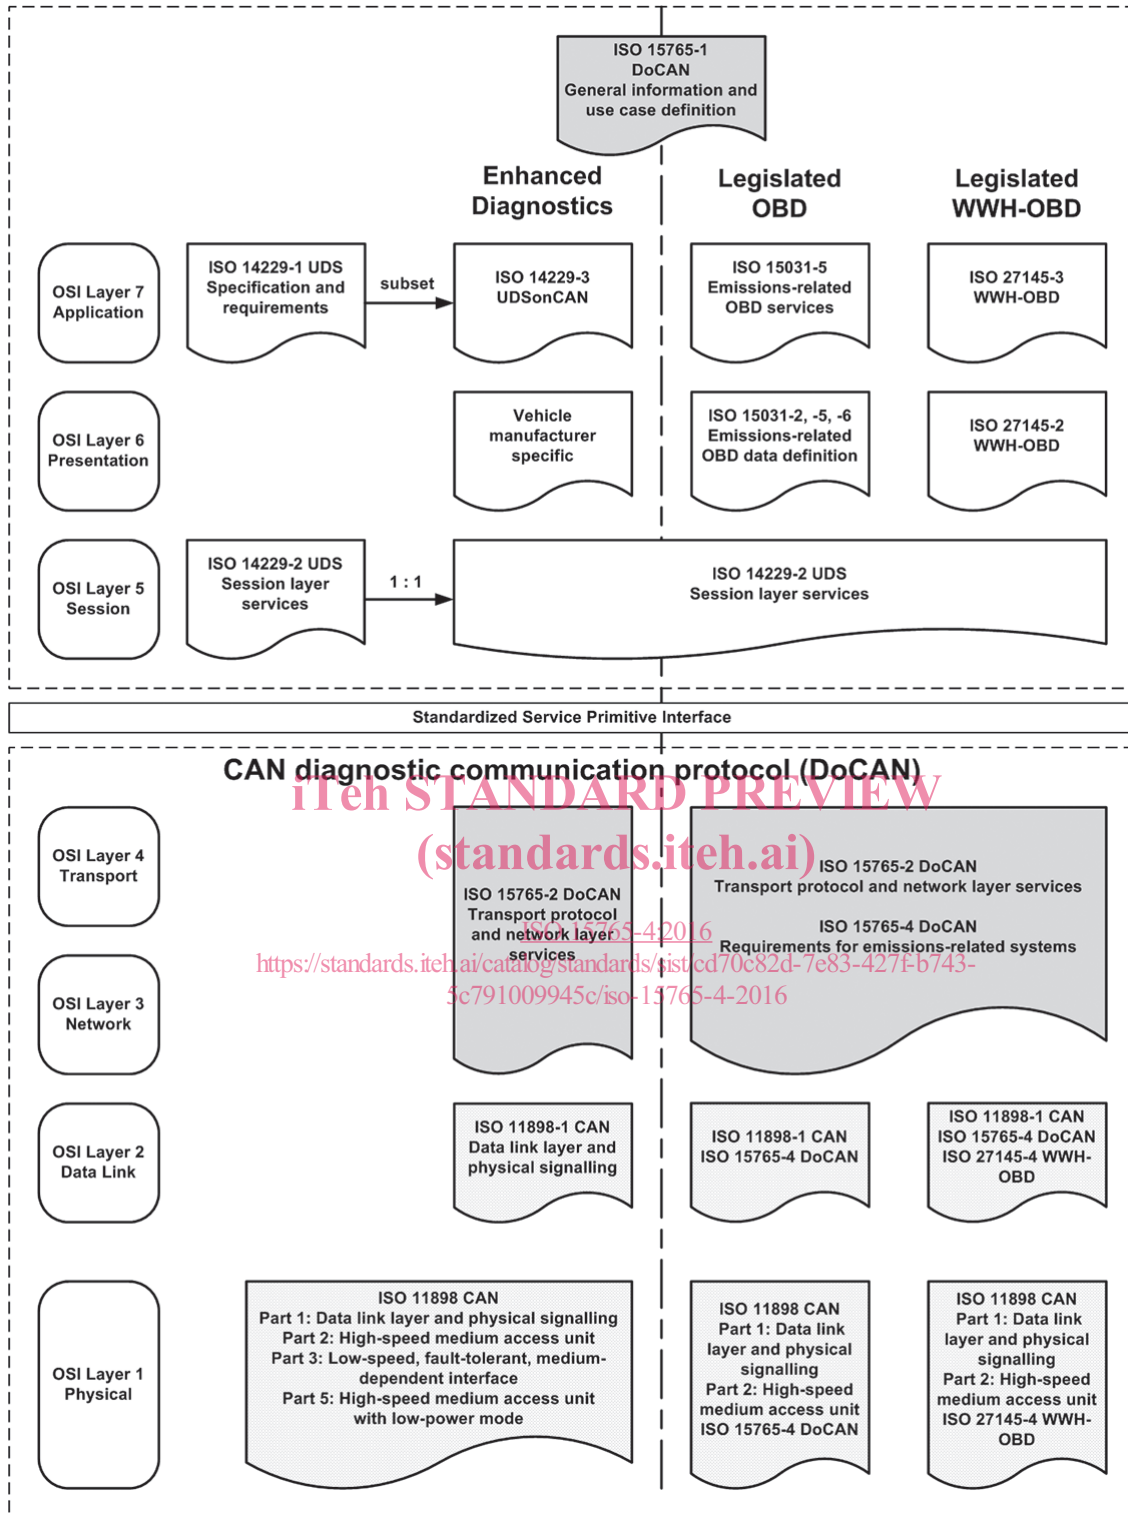


Figure 1 — Diagnostic communication over CAN document reference according to OSI model

6 External test equipment initialization sequence

6.1 General

The external test equipment shall support the initialization sequence specified in this part of ISO 15765 (see [Figure 2](#)).

The purpose of the external test equipment initialization sequence is to automatically detect whether the vehicle supports legislated OBD or WWH-OBD on CAN using the physical layer specified in [Clause 12](#).

Furthermore, the initialization sequence determines the communication compliance status of vehicles by analysing their responses to

- ISO 15031-5 service 01₁₆ 00₁₆ (PID supported) requests, or
- ISO 27145-3 service 22₁₆ F8₁₆ 10₁₆ (DID protocol identification) request with a positive response.

Only vehicles that follow the WWH-OBD regimen will have ECUs that reply to the functional request service 22₁₆ DID F810₁₆ for protocol identification. Vehicles that respond only to the functional request service 01₁₆ PID 00₁₆ support earlier OBD communication methods. Vehicles that do not respond to either request do not support regulated OBD diagnostics under this part of ISO 15765. [6.3](#) describes this procedure.

For each legislated OBD/WWH-OBD service that requires the determination of “supported” information, the external test equipment has to update its list of expected responding legislated OBD/WWH-OBD ECUs prior to any data parameter requests. For applicable services, see either ISO 15031-5 (for legislated OBD) or ISO 27145-3 (for legislated WWH-OBD).

The external test equipment initialization sequence supports single baudrate initialization (e.g. 500 kBit/s) and multiple baudrate initialization (e.g. 250 kBit/s and 500 kBit/s) and is separated into the following tests:

- a) 11 bit CAN identifier validation;
- b) 29 bit CAN identifier validation.

NOTE See [6.2.2](#).

The external test equipment initialization sequence contains provisions for legacy vehicles using either CAN (same or different physical layer as defined for legislated OBD/WWH-OBD) or a different protocol (non-CAN) on the CAN pins of the ISO 15031-3 diagnostic connector.

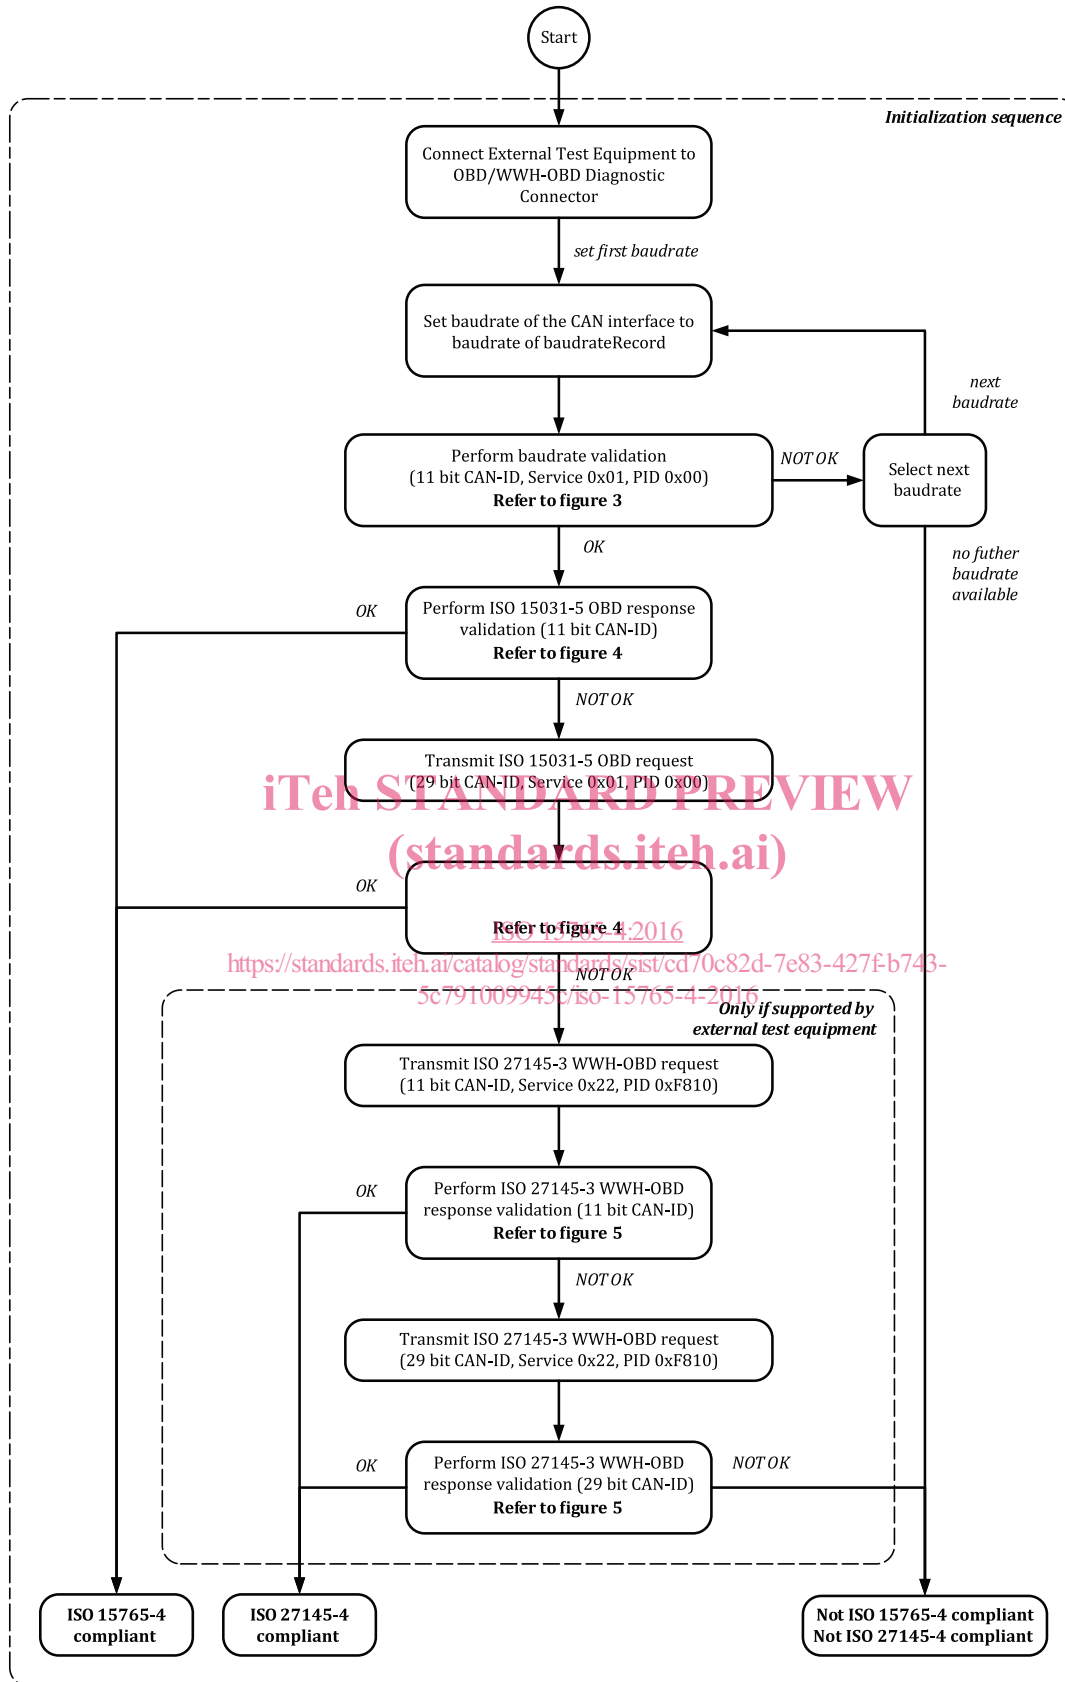


Figure 2 — Initialization sequence overview

6.2 and 6.3 describe the external test equipment initialization to determine baudrate and CAN identifier (11 bit or 29 bit) for OBD (ISO 15031) and WWH-OBD (ISO 27145).