
**Plastics piping systems for renovation
of underground non-pressure
drainage and sewerage networks —**

**Part 2:
Lining with continuous pipes**

iTeh STANDARD PREVIEW
*Systemes de canalisations en plastique pour la rénovation des réseaux
de branchements et de collecteurs d'assainissement enterrés sans
pression —*
(standards.iteh.ai)

Partie 2: Tubage par tuyau continu avec espace annulaire
ISO 11296-2:2018

<https://standards.iteh.ai/catalog/standards/sist/41fd1f14-88f3-4fd2-9526-7d7fc13e1c3a/iso-11296-2-2018>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 11296-2:2018

<https://standards.iteh.ai/catalog/standards/sist/41fd1f14-88f3-4fd2-9526-7d7fc13e1c3a/iso-11296-2-2018>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2018, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and abbreviated terms	2
4.1 Symbols.....	2
4.2 Abbreviated terms.....	2
5 Pipes at the “M” stage	2
5.1 Material.....	2
5.2 General characteristics.....	2
5.3 Material characteristics.....	3
5.4 Geometrical characteristics.....	3
5.5 Mechanical characteristics.....	3
5.6 Physical characteristics.....	3
5.7 Jointing.....	3
5.8 Marking.....	3
5.9 Regional requirements for pipes.....	3
6 Fittings at the “M” stage	3
6.1 Requirements.....	3
6.2 Marking.....	3
6.3 Regional requirements for fittings.....	3
7 Ancillary components	3
8 Fitness for purpose of the system for pipes and fittings at the “I” stage	4
9 Installation practice	4
9.1 Preparatory work.....	4
9.2 Storage, handling and transport.....	4
9.3 Equipment.....	4
9.3.1 Butt fusion equipment and de-beading equipment.....	4
9.3.2 Pipe rollers.....	5
9.3.3 Winching and rod-pulling equipment.....	5
9.3.4 Pipe entry guides.....	5
9.3.5 Electrofusion equipment.....	5
9.3.6 Inspection equipment.....	5
9.3.7 Lifting equipment.....	5
9.4 Installation.....	5
9.5 Process-related inspection and testing.....	6
9.6 Lining termination.....	6
9.7 Reconnection to the existing pipeline system.....	6
9.8 Final inspection and testing.....	6
9.9 Documentation.....	6
Annex A (normative) Layered pipes	7
Bibliography	8

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html. (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 138, *Plastics pipes, fittings and valves for the transport of fluids*, Subcommittee SC 8, *Rehabilitation of pipeline systems*.

A list of all parts in the ISO 11296 series can be found on the ISO website.

Introduction

This document is part of a system standard for plastics piping systems of various materials used for renovation of existing pipelines in a specified application area. System standards for renovation dealing with the following applications are either available or in preparation:

- ISO 11296, *Plastics piping systems for renovation of underground non-pressure drainage and sewerage networks (this application)*;
- ISO 11297, *Plastics piping systems for renovation of underground drainage and sewerage networks under pressure*;
- ISO 11298, *Plastics piping systems for renovation of underground water supply networks*;
- ISO 11299, *Plastics piping systems for renovation of underground gas supply networks*.

These system standards are distinguished from system standards for conventionally installed plastics piping systems by the requirement to verify certain characteristics in the “as installed” condition, after site processing. This is in addition to verification of characteristics of plastics piping systems “as manufactured”.

Each of the system standards comprises a:

- *Part 1: General*


and all applicable renovation technique family-related parts, which for non-pressure drainage and sewerage networks include or potentially include the following:

- *Part 2: Lining with continuous pipes (this document)*
- *Part 3: Lining with close-fit pipes* [ISO 11296-2:2018](https://standards.iteh.ai/catalog/standards/sist/41fd1f14-88f3-4fd2-9526-c3a/iso-11296-2-2018)
- *Part 4: Lining with cured-in-place pipes* <https://standards.iteh.ai/catalog/standards/sist/41fd1f14-88f3-4fd2-9526-c3a/iso-11296-2-2018>
- *Part 5: Lining with discrete pipes*
- *Part 7: Lining with spirally-wound pipes*
- *Part 8: Lining with pipe segments*
- *Part 9: Lining with rigidly anchored plastics inner layer*
- *Part 10: Lining with sprayed polymeric materials*

The requirements for any given renovation technique family are specified in ISO 11296-1, applied in conjunction with the relevant other part. For example, both ISO 11296-1 and this document together specify the requirements relating to lining with continuous pipes. For complementary information, see ISO 11295. Not all technique families are pertinent to every area of application and this is reflected in the part numbers included in each System Standard.

A consistent structure of clause headings has been adopted for all parts to facilitate direct comparisons across renovation technique families.

[Figure 1](#) shows the common part and clause structure and the relationship between ISO 11296 and system standards for other applications.

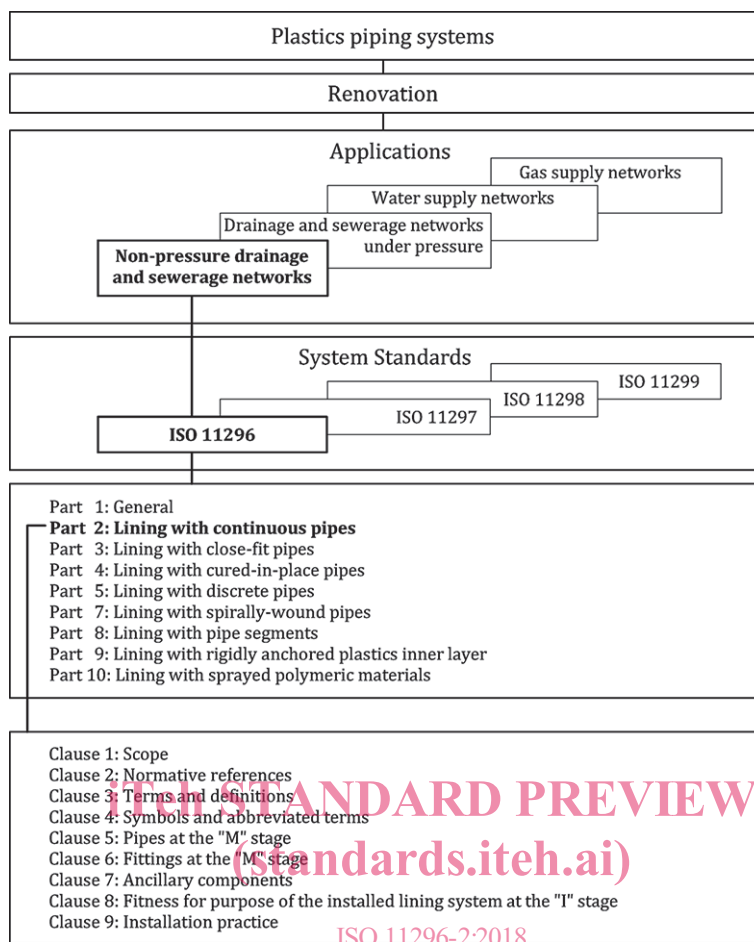

<https://standards.iteh.ai/catalog/standards/sist/41fd1f14-88f3-4fd2-9526-7d16-2e12a5vat1296-2-2018>

Figure 1 — Format of the renovation system standards

Plastics piping systems for renovation of underground non-pressure drainage and sewerage networks —

Part 2: Lining with continuous pipes

1 Scope

This document, in conjunction with ISO 11296-1, specifies requirements and test methods for pipes and fittings which are part of plastics piping systems installed as continuous pipes in the renovation of underground non-pressure drainage and sewerage networks. It is applicable to polyethylene (PE) pipes of three different types:

- PE solid wall single layered pipes (nominal outside diameter, d_n), including any identification stripes;
- PE pipes with co-extruded layers on either or both the outside and inside of the pipe (total outside diameter, d_n), as specified in [Annex A](#), where all layers have the same MRS rating;
- PE coated pipes (outside diameter, d_n) having a peelable, contiguous, thermoplastics additional layer on the outside of the pipe ("coated pipe"), see [Annex A](#).

In addition it covers:

- jointing of pipe lengths by means of butt fusion;
- fabricated and injection-moulded fittings made of PE.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8772, *Plastics piping systems for non-pressure underground drainage and sewerage — Polyethylene (PE)*

ISO 11296-1:2018, *Plastics piping systems for renovation of underground non-pressure drainage and sewerage networks — Part 1: General*

ISO 12176-1, *Plastics pipes and fittings — Equipment for fusion jointing polyethylene systems — Part 1: Butt fusion*

ISO 12176-2, *Plastics pipes and fittings — Equipment for fusion jointing polyethylene systems — Part 2: Electrofusion*

EN 12666-1, *Plastics piping systems for non-pressure underground drainage and sewerage — Polyethylene (PE) — Part 1: Specifications for pipes, fittings and the system*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11296-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>

— ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 compound formulation
clearly defined homogenous mixture of base polymer with additives e.g. anti-oxidants, pigments, stabilisers and others, at a dosage level necessary for the processing and intended use of the final product

3.2 coated pipe
pipe with a peelable, contiguous thermoplastic additional layer on the outside of the pipe

3.3 solid wall single layered pipe
pipe with smooth internal and external surface, extruded from the same compound/formulation throughout the wall

3.4 pipe with co-extruded layers
pipe with smooth internal and external surface, having co-extruded layers on either or both the outside and inside of the pipe, where all layers have the same MRS rating

3.5 out-of-roundness
difference between the measured maximum and the measured minimum outside diameter in the same cross-sectional plane of the pipe

iTeh STANDARD PREVIEW
(standards.iteh.ai)

4 Symbols and abbreviated terms

4.1 Symbols

d_n nominal outside diameter [ISO 11296-2:2018
https://standards.iteh.ai/catalog/standards/sist/41fd1f14-88f3-4fd2-9526-7d7fc13e1c3a/iso-11296-2-2018](https://standards.iteh.ai/catalog/standards/sist/41fd1f14-88f3-4fd2-9526-7d7fc13e1c3a/iso-11296-2-2018)

e_{coating} nominal thickness of the coating

4.2 Abbreviated terms

MFR melt mass-flow rate
CCTV closed-circuit television
MRS minimum required strength
OIT oxidation induction time
PE polyethylene

5 Pipes at the “M” stage

5.1 Material

Pipes shall be of PE conforming to the requirements of ISO 8772.

5.2 General characteristics

General characteristics of pipes shall conform to the requirements of ISO 8772.

5.3 Material characteristics

Material characteristics shall conform to the requirements of ISO 8772.

5.4 Geometrical characteristics

Geometrical characteristics of pipes shall conform to the requirements of ISO 8772. In addition, any combination of nominal diameter and wall thickness shall be permitted, provided this is validated by design calculations that take account of both installation and operational loadings on the pipe for a specific application.

5.5 Mechanical characteristics

The mechanical characteristics of pipes shall conform to the requirements of ISO 8772.

5.6 Physical characteristics

The physical characteristics of pipes shall conform to the requirements of ISO 8772.

5.7 Jointing

When pipes are assembled to each other or to components the joints shall conform to ISO 8772. All butt fusions shall be externally de-beaded and, if required by the client, internally de-beaded.

5.8 Marking

All pipes shall be marked either in accordance with ISO 11296-1 or ISO 8772. Where the pipe is coated (see [A.3](#)) the coating shall be marked to clearly distinguishing the pipe from non-coated pipe in service (e.g. by broad colour bands).

5.9 Regional requirements for pipes

In countries of the Single European Market, ISO 8772 specified as normative reference in [5.1](#) to [5.8](#) is replaced by EN 12666-1.

6 Fittings at the “M” stage

6.1 Requirements

Fittings shall fulfil the requirements in ISO 8772.

NOTE Wide tolerance fittings can be required for compatibility with pipe dimensions as specified in [5.4](#).

6.2 Marking

Each fitting shall be marked either in accordance with ISO 11296-1 or ISO 8772.

6.3 Regional requirements for fittings

In countries of the Single European Market, ISO 8772 specified as normative reference in [6.1](#) to [6.2](#) is replaced by EN 12666-1.

7 Ancillary components

This document does not cover any ancillary components.