

SLOVENSKI STANDARD
oSIST prEN ISO 28199-3:2020
01-september-2020

Barve in laki - Vrednotenje lastnosti premaznih sistemov pri nanašanju - 3. del: Vizualno ocenjevanje polzenja, pojava mehurčkov, luknjic in kritnosti (ISO/DIS 28199-3:2020)

Paints and varnishes - Evaluation of properties of coating systems related to the application process - Part 3: Assessment of sagging, formation of bubbles, pinholing and hiding power (ISO/DIS 28199-3:2020)

Beschichtungsstoffe - Beurteilung applikationsbedingter Eigenschaften von Beschichtungssystemen - Teil 3: Visuelle Beurteilung von Ablaufneigung, Kocherbildung, Nadelstichbildung und Deckvermögen (ISO/DIS 28199-3:2020)

<https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8292e8735292/ksist-pr-en-iso-28199-3-2020>

Peintures et vernis - Évaluation des propriétés des systèmes de revêtement liées au mode d'application - Partie 3: Évaluation visuelle du festonnage, de la formation de bulles, des piqûres et du pouvoir masquant (ISO/DIS 28199-3:2020)

Ta slovenski standard je istoveten z: prEN ISO 28199-3

ICS:

87.040 Barve in laki Paints and varnishes

oSIST prEN ISO 28199-3:2020 en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[kSIST FprEN ISO 28199-3:2021](https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021)

<https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021>

DRAFT INTERNATIONAL STANDARD

ISO/DIS 28199-3

ISO/TC 35/SC 9

Secretariat: BSI

Voting begins on:
2020-06-23Voting terminates on:
2020-09-15

Paints and varnishes — Evaluation of properties of coating systems related to the application process —

Part 3:

Assessment of sagging, formation of bubbles, pinholing and hiding power

*Peintures et vernis — Évaluation des propriétés des systèmes de revêtement liées au mode d'application —
Partie 3: Évaluation visuelle du festonnage, de la formation de bulles, des piqûres et du pouvoir masquant*

ICS: 87.040

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ksIST FprEN ISO 28199-3:2021](https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021)<https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.

ISO/CEN PARALLEL PROCESSING



Reference number
ISO/DIS 28199-3:2020(E)

© ISO 2020

iTeh STANDARD PREVIEW (standards.iteh.ai)

[kSIST FprEN ISO 28199-3:2021](https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021)

<https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Tendency to sagging.....	1
4.1 General.....	1
4.2 Evaluation.....	3
5 Bubbles.....	3
5.1 General.....	3
5.2 Evaluation.....	3
6 Pinholing.....	3
6.1 General.....	3
6.2 Evaluation.....	3
7 Hiding power.....	3
7.1 General.....	3
7.2 Evaluation.....	4
8 Test report.....	4
Annex A (informative) Examples of bubbles, pinholes and craters.....	5
Bibliography.....	13

[kSIST FprEN ISO 28199-3:2021](https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021)
<https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021>

ISO/DIS 28199-3:2020(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 35, *Paints and varnishes*, Subcommittee SC 9, *General test methods for paints and varnishes*.

This second edition cancels and replaces the first edition (ISO 28199-3:2009), which has been technically revised.

The main changes compared to the previous edition are as follows:

- assessment using measuring techniques was added for all evaluations;
- process hiding power ([Clause 7](#)) was changed to hiding power;
- 3-D photographs and the associated profiles have been included for bubbles and pinholes;
- the normative references have been updated;
- the standard has been editorially revised.

A list of all parts in the ISO 28199 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

In many areas (e.g. car manufacture, industrial coatings, coatings for plastics) the coating materials used are adapted to the specific application equipment and technologies of the particular user. A coating material is, therefore, to be understood as a semi-manufactured product that only receives its final form in combination with the specific application conditions. The adaptation to the application conditions is therefore decisive for the quality of the coated product.

The test methods specified in ISO 28199 are based on studies by a Working Group of the European Council for Automotive R&D (EUCAR).

They may be used for evaluation of coating materials in research, development and production with regard to their suitability and safety for industrial processes, and error analysis. The properties of coating materials and coatings to be evaluated depend on the film thickness, so a coating system of increasing thickness is applied to a test panel under defined conditions.

The following characteristics are measured (in accordance with ISO 28199-1):

- film thickness in accordance with ISO 2808;
- surface texture;
- colour in accordance with ISO 18314-1;
- mottling;
- gloss in accordance with ISO 2813.

The following properties are determined in combination with visual assessment or, if necessary, optical measurement techniques:

- colour stability/colour evaluation, process hiding power, re-dissolving, overspray absorption, wetting, surface texture and mottling (ISO 28199-2);
- tendency to sagging, formation of bubbles, pinholing and hiding power (this document).

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[kSIST FprEN ISO 28199-3:2021](https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021)

<https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021>

Paints and varnishes — Evaluation of properties of coating systems related to the application process —

Part 3:

Assessment of sagging, formation of bubbles, pinholing and hiding power

IMPORTANT — The electronic file of this document contains colours which are considered to be useful for the correct understanding of the document. Users should therefore consider printing this document using a colour printer.

1 Scope

This document specifies visual methods for the assessment of tendency to sagging, formation of bubbles, pinholing and hiding power of coating materials applied to a test panel under defined conditions.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6504-3, *Paints and varnishes — Determination of hiding power — Part 3: Determination of hiding power of paints for masonry, concrete and interior use*

ISO 18314-1, *Analytical colorimetry — Part 1: Practical colour measurement*

ISO 28199-1:2009, *Paints and varnishes — Evaluation of properties of coating systems related to the application process — Part 1: Relevant vocabulary and preparation of test panels*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 28199-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 Tendency to sagging

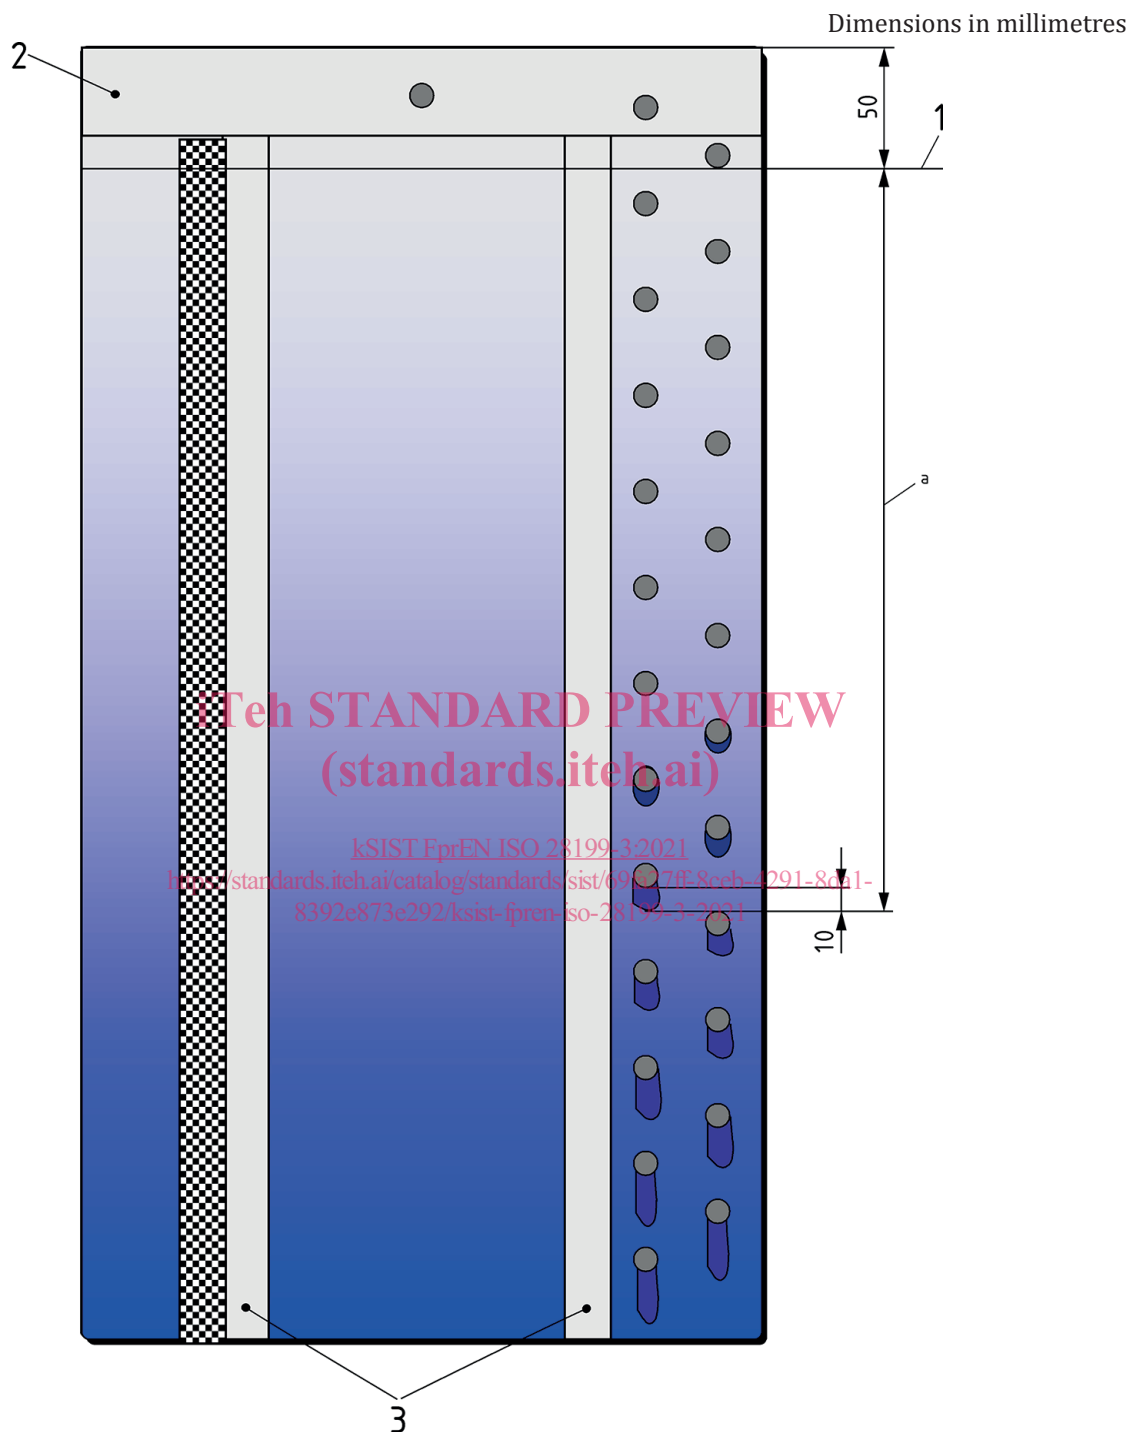
4.1 General

The tendency to sagging is determined by visual assessment or measurement of runs and sags (as defined in ISO 4618, called only sags in the entire text). This assessment is made after drying/curing of the coating, on a panel prepared in accordance with Version A in ISO 28199-1:2009.

If a tendency to sagging is already visible in the liquid layer, this should be marked at the edge of the panel.

ISO/DIS 28199-3:2020(E)

Film thickness is determined using the values measured in accordance with 9.4.2 of ISO 28199-1:2009, 9.4.2.

**Key**

- 1 measuring series 1
- 2 coil-coated reference strip
- 3 clear-coated reference strip
- a Distance from start of coating to a sag with a length of 10 mm

Figure 1 — Example for the assessment of the tendency to sagging

4.2 Evaluation

After drying/curing of the coating, assess the perforated area of the test panel (see ISO 28199-1:2009, Figure 2) to assess the tendency to sagging. Determine the hole at which the sag exceeds a length of 10 mm, for example, as agreed by the contractual parties, from the lower edge of the hole (see [Figure 1](#)), and determine the film thickness corresponding to that hole in accordance with 9.4.2 of ISO 28199-1:2009. The greater the distance a for a given film thickness, the less the tendency of the coating to sag. A control chart of film thickness vs distance a may be helpful in this evaluation.

Other lengths of sag for measuring film thickness may be agreed by interested parties.

5 Bubbles

5.1 General

The bubble formation limit is assessed after drying/curing of the coating. Examples of bubbles in a coating material are shown in [Figures A.1](#) and [A.2](#).

The film thickness is determined in accordance with 9.4.2 of ISO 28199-1:2009.

5.2 Evaluation

After drying/curing of the coating, assess the bubble formation limit (see 3.2 of ISO 28199-1:2009) visually or using measuring techniques in the range of the film thickness measurement pattern in the wedge area (see ISO 28199-1:2009, Figure 5 and Figure 6).

Determine the film thickness which corresponds to this bubble formation limit by using the film thickness measurement pattern.

6 Pinholing

<https://standards.iteh.ai/catalog/standards/sist/69fa27ff-8ceb-4291-8da1-8392e873e292/ksist-fpren-iso-28199-3-2021>

6.1 General

The pinholing limit is assessed after drying/curing of the coating. Examples of pinholes in a coating material are shown in [Figures A.3](#) to [A.6](#).

The film thickness values are determined in accordance with 9.4.2 of ISO 28199-1:2009.

6.2 Evaluation

After drying/curing of the coating, assess the pinholing limit (see 3.11 of ISO 28199-1:2009) visually or using measuring techniques in the range of the film thickness measurement pattern in the wedge area (see ISO 28199-1:2009, Figure 5 and Figure 6).

Using the film thickness measurement pattern, determine the film thickness corresponding to this pinholing limit.

7 Hiding power

7.1 General

With regard to hiding power, a distinction is made between process hiding power and “black/white” hiding power (see ISO 28199-1:2009, 3.12). Assessment of the pinholing limit is made after drying/curing of the coating.

The film thickness values are determined in accordance with 9.4.2 of ISO 28199-1:2009.