



SLOVENSKI STANDARD
SIST EN 420:2003

01-december-2003

BUXca Yý U
SIST EN 420:1996

Varovalne rokavice - Splošne zahteve in preskusne metode

Protective gloves - General requirements and test methods

Schutzhandschuhe - Allgemeine Anforderungen und Prüfverfahren

Gants de protection - Exigences générales et méthodes d'essai

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: ~~SIST EN 420:1996~~ EN 420:2003

<https://standards.iteh.ai/catalog/standards/sist/1e7d1941-8fd5-42d2-85a7-2fa304dd936/sist-en-420-2003>

ICS:

13.340.40 Varovanje dlani in rok Hand and arm protection

SIST EN 420:2003

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 420:2003

<https://standards.iteh.ai/catalog/standards/sist/1e7d1941-8fd5-42d2-85a7-2f6a304dd936/sist-en-420-2003>

English version

Protective gloves - General requirements and test methods

Gants de protection - Exigences générales et méthodes
d'essai

Schutzhandschuhe - Allgemeine Anforderungen und
Prüfverfahren

This European Standard was approved by CEN on 24 July 2003.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovakia, Spain, Sweden, Switzerland and United Kingdom.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 420:2003

<https://standards.iteh.ai/catalog/standards/sist/1e7d1941-8fd5-42d2-85a7-2f6a304dd936/sist-en-420-2003>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

page

Foreword.....	3
Introduction	4
1 Scope	4
2 Normative references	4
3 Terms and definitions.....	5
4 General requirements.....	6
4.1 Glove design and construction — General	6
4.2 Resistance of glove materials to water penetration.....	6
4.3 Innocuousness of protective gloves	7
4.4 Cleaning.....	8
4.5 Electrostatic properties.....	8
5 Comfort and efficiency	8
5.1 Sizing.....	8
5.2 Dexterity.....	10
5.3 Water vapour transmission and absorption	10
6 Test procedures	10
6.1 Hand and glove measurement and dimensions	10
6.2 Test method for determining gloved finger dexterity	11
6.3 Test method for determination of water vapour transmission	11
6.4 Test method for determination of water vapour absorption	14
7 Marking and information	17
7.1 General.....	17
7.2 Marking	17
7.3 Information supplied by the manufacturer.....	18
Annex A (informative) Definition of "For minimal risks only"	20
Annex B (normative) Leather - Chemical tests - Determination of chromium VI content	21
B.1 Scope	21
B.2 Principle	21
B.3 Definition.....	21
B.4 Chemicals	21
B.5 Apparatus	22
B.6 Procedure	23
B.7 Calculation and expression of results	25
B.8 Accuracy	26
B.9 Test report	26
B.10 Reversed phase material.....	26
Annex C (normative) Pictograms.....	27
Annex D (informative) Test results — Uncertainty of measurement.....	28
Annex ZA (informative) Clauses of this European Standard addressing essential requirements or other provisions of EU Directives	29
Bibliography	30

Foreword

This document EN 420:2003 has been prepared by Technical Committee CEN/TC 162 “Protective clothing including hand and arm protection and lifejackets”, the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2004, and conflicting national standards shall be withdrawn at the latest by March 2004.

This document supersedes EN 420:1994.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

Annexes A and D are informative and annexes B and C are normative.

This document includes a Bibliography.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovakia, Spain, Sweden, Switzerland and the United Kingdom.

SIST EN 420:2003

<https://standards.iteh.ai/catalog/standards/sist/1e7d1941-8fd5-42d2-85a7-2f6a304dd936/sist-en-420-2003>

Introduction

This European Standard is a reference standard to be called up as appropriate by the specific European Standards relevant or applicable to protective gloves.

This standard should not be used alone, but only in combination with the appropriate specific standard.

1 Scope

This standard defines the general requirements and relevant test procedures for glove design and construction, resistance of glove materials to water penetration, innocuousness, comfort and efficiency, marking and information supplied by the manufacturer applicable to all protective gloves.

NOTE It can also be applicable to arm protectors and gloves permanently incorporated in containment enclosures.

This European Standard does not address the protective properties of gloves and therefore should not be used alone but only in combination with the appropriate specific European Standard(s).

A non exhaustive list of these standards is given in the Bibliography.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

2 Normative references

[SIST EN 420:2003](#)

<https://standards.iteh.ai/catalog/standards/sist/1e7d1941-8fd5-42d2-85a7-1a30c1d1e1e1/en-420:2003>

This European standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text, and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

EN 344-1:1992, *Safety, protective and occupational footwear for professional use — Part 1: Requirements and test methods.*

EN 374-1:2003, *Protective gloves against chemicals and micro-organisms — Part 1: Terminology and performance requirements.*

EN 407, *Protective gloves against thermal risks (heat and/or fire).*

EN 455-3, *Medical gloves for single use — Part 3 : Requirements and testing for biological evaluation.*

EN 1149-1, *Protective clothing — Electrostatic properties — Part 1: Surface resistivity (Test methods and requirements).*

EN 1149-2, *Protective clothing - Electrostatic properties — Part 2: Test method for measurement of the electrical resistance through a material (vertical resistance).*

prEN 1149-3, *Protective clothing — Electrostatic properties — Part 3: Test methods for measurement of charge decay.*

EN 1413, *Textiles — Determination of pH of aqueous extract.*

EN 20811, *Textiles — Determination of resistance to water penetration — Hydrostatic pressure test.*

EN 23758, *Textiles - Care labelling code using symbols (ISO 3758:1991).*

EN ISO 2419, *Leather - Physical and mechanical tests - Sample preparation and conditioning (ISO 2419:2002).*


EN ISO 3696, *Water for analytical laboratory use — Specification and test methods (ISO 3696:1987).*

EN ISO 4045, *Leather — Determination of pH (ISO 4045:1977).*

EN ISO 4048, *Leather — Determination of matter soluble in dichloromethane (ISO 4048:1977).*

3 Terms and definitions

For the purposes of this European Standard, the following terms and definitions apply (see Figure 1).

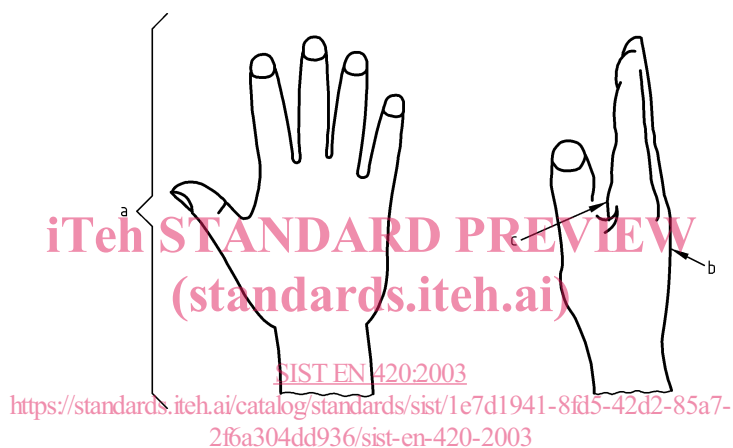

Key

- a Hand
- b Back
- c Palm

Figure 1 — Definitions of hand, palm and back

3.1

hand

part of the body from the tip of the middle finger to the wrist

3.2

glove

personal protective equipment (PPE) which protects the hand or part of the hand against hazards. It can additionally cover part of the forearm and arm

3.3

glove palm

part of the glove which covers the palm of the hand, i.e. from the wrist to the base of the fingers

3.4

glove back

part of the glove which covers the back of the hand (i.e. from the wrist to the base of the fingers)

3.5

dexterity

manipulative ability to perform a task

3.6

hazard

situation which can be the cause of any harm or damage to the health of the human body. A non exhaustive list of specific standards dealing with hazards is given in the Bibliography

3.7

level of performance

number that designates a particular category or range of performance by which the results of testing can be graded

The level of performance is determined by the result of the corresponding test as described in the specific standards referred to in the Bibliography. A high level number corresponds to a high level of performance.

Levels of performance are based upon the results of laboratory tests, which do not necessarily reflect actual conditions in the workplace.

4 General requirements

4.1 Glove design and construction — General

The protective glove shall be designed and manufactured so that in the foreseeable conditions of use for which it is intended, the user can perform the hazard related activity normally whilst enjoying appropriate protection at the highest possible level.

If required, the glove shall be designed to minimize the time needed for putting on and taking off.

When the glove construction includes seams, the material and strength of the seams shall be such that the overall performance of the glove is not significantly decreased. Where relevant, test methods and requirements are specified in the specific standards listed in the Bibliography.

4.2 Resistance of glove materials to water penetration

For glove materials where resistance to water penetration is required (according to the intended use of the glove), the appropriate test methods shall be used :

- For leather gloves: 5.12 of EN 344-1:1992. The results shall be reported according to Table 1;
- Alternative test method which is more appropriate to textile materials: EN 20811. The results shall be reported as a pressure in Pascal as required in EN 20811.

NOTE 1 There is no known correlation between results obtained through these different test methods.

NOTE 2 These tests are not suitable to classify these gloves as waterproof.

Table 1 — Levels of performance — resistance to water penetration according to 5.12 of EN 344-1:1992

Level of performance	Time of penetration min
1	30
2	60
3	120
4	180

4.3 Innocuousness of protective gloves

4.3.1 General

Protective gloves shall be designed and manufactured to provide protection when used according to the manufacturer's instructions, without harm to the user.

Glove materials, degradation products, incorporated substances, seams and edges and particularly those parts of the glove in close contact with the user shall not adversely affect the user's health and hygiene.

The manufacturer or his authorized representative shall name all the substances contained in the glove which are known to cause allergies (see 7.3.8).

4.3.2 Determination of pH Value

SIST EN 420:2003

The pH value for all gloves shall be greater than 3,5 and less than 9,5.

Determination of pH shall be according to EN ISO 4045 for leather gloves, and EN 1413 for other materials. Following amendments shall apply:

- the test piece shall be cut out from the palm area of the glove. If other parts of the glove are made of different materials, then each material shall be tested separately;
- if gloves are made of more than one layer, all layers shall be tested together;
- if the sample contains leather, then EN ISO 4045 shall be used;
- subclause 8.4 of EN ISO 4045:1998 does not apply.

4.3.3 Determination of chromium (VI) content

Chromium VI content in leather gloves shall be less than the detection limit according to the test method described in annex B. Chromium VI content shall be determined according to the test method specified in annex B. At least two samples shall be taken from different gloves for each leather type.

If the glove is made of different types of leather, whether in contact with the skin or not, then the test shall be performed on each type. The highest value shall be considered as the final result.

4.3.4 Determination of extractable protein content

Natural rubber gloves shall be submitted to requirements stated in EN 455-3 on extractable protein content.

NOTE This method has not yet been validated for gloves other than medical gloves for single use.

4.4 Cleaning

All tests required in this standard as well as in the standards for protective gloves shall be performed on unused gloves unless otherwise specified. If care instructions are provided (see 7.3.10), the relevant tests of the specific standards (see Bibliography) shall be performed on the gloves, before and after they have been subjected to the maximum recommended number of cleaning cycles.

The levels of performance shall not be negatively affected throughout the recommended number of cycles.

4.5 Electrostatic properties

If required, the electrostatic properties shall be tested according to the test method described in the relevant standard EN 1149-1 or EN 1149-2 or prEN 1149-3.

The test result shall be reported in the information supplied by the manufacturer accompanied by the information stated in 7.3.11. Electrostatic pictograms shall not be used for this property.

NOTE These tests are designed for garments and have not been validated for gloves. Some interlaboratory trials have shown significant discrepancies in test results for one of the methods. It is thus essential to give comprehensive information about the test parameters used along with any test result.

5 Comfort and efficiency

iteh STANDARD PREVIEW
(standards.iteh.ai)

5.1 Sizing

5.1.1 Sizes and measurement of hands

[SIST EN 420:2003](#)

<https://standards.iteh.ai/catalog/standards/sist/1e7d1941-8fd5-42d2-85a7-2f150-4d336/sist-en-420-2003>

Two primary measurements are taken according to 6.1:

- hand circumference;
- hand length (distance between the wrist and the tip of the middle finger).

Six sizes of hands are defined in Table 2, according to anthropomorphic surveys conducted in different countries. Half sizes can be derived by interpolation between full sizes. Any smaller and larger sizes can be derived by extrapolation of the data in Tables 2 and 3.

Table 2 — Sizes of hands

Hand size ^a	Hand circumference mm	Hand length mm
6	152	160
7	178	171
8	203	182
9	229	192
10	254	204
11	279	215

^a This code is a conventional designation of hand size corresponding to the hand circumference expressed in inches.

5.1.2 Sizes and measurements of glove

Sizes of gloves are defined with respect to the sizes of the hands they are to fit.

Six sizes are defined in Table 3.

The minimum length of glove for half sizes shall be the one of the next higher full size.

Actual measurements of gloves shall be determined by the manufacturer taking into account the behaviour of the glove material and intended use.

[SIST EN 420:2003
https://standards.iteh.ai/catalog/standards/sist/1e7d1941-8fd5-42d2-85a7-2f6a304dd936/sist-en-420-2003](https://standards.iteh.ai/catalog/standards/sist/1e7d1941-8fd5-42d2-85a7-2f6a304dd936/sist-en-420-2003)

Table 3 — Sizes of gloves

Glove size	Fit	Minimum length of glove (in accordance with 6.1.3) mm
6	hands size 6	220
7	hands size 7	230
8	hands size 8	240
9	hands size 9	250
10	hands size 10	260
11	hands size 11	270

Actual measurements of gloves shall be determined, taking into account the behaviour of the glove material and intended use.

5.1.3 Gloves for special applications

It is possible that the length of gloves designed for special applications may not conform to the values of Table 3.

For such gloves, the manufacturer shall demonstrate that they are "fit for special purpose" by clearly stating in the instructions for use (7.3) the intended application(s) and the reason why the gloves do not conform to Table 3.

5.2 Dexterity

A glove should allow as much dexterity as possible given its purpose. Dexterity is related to numerous factors e. g. thickness of glove material, its elasticity, its deformability.

If required, finger dexterity shall be tested according to the test method in 6.2.

The performances shall be graded according to Table 4 hereafter.

Table 4 — Levels of performance - finger dexterity test

Level of performance	Smallest diameter of pin fulfilling test conditions mm
1	11
2	9,5
3	8
4	6,5
5	5

iTech STANDARD PREVIEW
(standards.iteh.ai)

5.3 Water vapour transmission and absorption

5.3.1 Where practicable, protective gloves shall allow water vapour transmission.

<https://standards.iteh.ai/catalog/standards/sist/1e7d1941-8fd5-42d2-85a7-2f2384d51631/en-420:2003>

If required, gloves shall have a water vapour transmission of at least 5 mg/(cm² · h) when tested according to 6.3.

5.3.2 Where the protection characteristics of the glove inhibits or excludes water vapour transmission, then the glove shall be designed to reduce the effect of perspiration as much as possible.

If required, gloves shall have a water vapour absorption of at least 8 mg/cm² for 8 h when tested according to 6.4.

6 Test procedures

6.1 Hand and glove measurement and dimensions

6.1.1 The circumference of the hand is measured with a tape, 20 mm from the crotch between thumb and index finger (see Figure 2).

6.1.2 Length of hand is as shown on Figure 2.

6.1.3 Measure the length by freely suspending the glove with the middle finger on a vertical graduated rule having a rounded tip so as to fit the shape of the finger tip of the glove. Remove wrinkles and folds without stretching the glove. Record the minimum measured length to the nearest millimeter.

NOTE For greater ease of measurement, the rule can be angled backwards slightly so that the glove is in contact with the rule.