



SLOVENSKI STANDARD

oSIST prEN 17394-2:2019

01-september-2019

Tekstilije in tekstilni izdelki - 2. del: Varnost otroških oblačil - Varnost pritrditve gumbov - Preskusna metoda

Textiles and textile products - Part 2: Safety of children's clothing - Security of attachment of buttons - Test method

Textilien und textile Produkte - Teil 2: Sicherheit von Kinderbekleidung - Sicherheit der Befestigung von Knöpfen - Prüfverfahren

Textiles et produits textiles - Partie 2 : Sécurité des vêtements d'enfants — Sécurité d'attache des boutons - Méthode d'essai

Ta slovenski standard je istoveten z: prEN 17394-2

ICS:

61.020	Oblačila	Clothes
97.190	Otroška oprema	Equipment for children

oSIST prEN 17394-2:2019

en,fr,de

ITeH STANDARD PREVIEW
(standards.iteh.ai)

Full standard:
<https://standards.iteh.ai/catalog/standards/sist/013e6d51-839a-45d9-afa4-423d834886b3/osist-pre-17394-2-2019>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 17394-2

July 2019

ICS 61.020; 97.190

English Version

Textiles and textile products - Part 2: Safety of children's clothing - Security of attachment of buttons - Test method

Sicherheit von Kinderbekleidung;
Kleinkinderbekleidung - Teil 1: Sicherheit der
Befestigung von Knöpfen - Prüfverfahren

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 248.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents

European foreword.....	3
Introduction	4
1 Scope	5
2 Normative references	5
3 Terms and definitions	6
4 Method for determination of removal force of buttons	7
4.1 General.....	7
4.2 Principle	7
4.3 Apparatus.....	7
4.3.1 Constant rate of extension (CRE) tensile-testing machine.....	7
4.3.2 Upper Button Box.....	7
4.3.3 Lower Base Clamp.....	9
4.4 Atmosphere for conditioning and testing	10
5 Sampling and selection of test specimens.....	10
5.1 Sampling.....	10
5.2 Selection of test specimens.....	10
6 Procedure.....	11
6.1 Rate of extension or elongation	11
6.2 Machine set-up and test specimen mounting	11
6.3 Operation of the Constant Rate of Extension (CRE) machine.....	11
7 Test report.....	12
Annex A (informative) Interlaboratory Trial Result.....	13
A.1 Background	13
A.2 Overall Conclusion.....	13
A.3 Interlaboratory Trial	13
A.3.1 Principle	13
A.3.2 Objective of trial	13
A.3.3 Trial Method	14
A.3.3.1 Participating test houses	14
A.3.3.2 CRE machines used	14
A.3.3.3 Specimens	14
A.3.4 Statistical Methods.....	15
A.3.5 Results.....	15
A.3.6 Conclusion.....	21
Annex B (informative) Method of test for in-line production process control	22
Annex C (informative) Interpretation of results.....	23
Bibliography.....	24

European foreword

This document (prEN 17394-2:2019) has been prepared by Technical Committee CEN/TC 248 “Textiles and Textile Products”, the secretariat of which is held by BSI.

This document is currently submitted to the Enquiry.

ITeH STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/013e6e51-839a-45d9-afa4-423d834886b3/osist-pre-17394-2-2019>

Introduction

The aim of this document is to assess the attachment strength of buttons.

This standard provides a reference method of test for compliance assessment. A document providing performance specification for infant's clothing is under development.

For the convenience of the clothing industry, a simplified method is provided in Annex B for routine in-house process control, however this does not replace the reference method.

This document has been developed from Annex B of CEN/TR 16792:2014.

ITEH STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/013e6e51-839a-45d9-afa4-423d834886b3/osist-pre-17394-2-2019>

1 Scope

This document defines a test method for security of attachment of functional and decorative buttons to clothing including garments such as gloves, hats, scarves, hosiery, ties, and textile belts.

This document does not apply to:

- a) child care articles;
- b) shoes, boots and similar footwear;
- c) toys (see NOTE 2);
- d) other articles sold with clothing.

NOTE 1 The above items are covered by other CEN Technical Committees and as such are out of scope of this document.

NOTE 2 Toy disguise costumes including carnival costumes are examples of clothing which are also toy and fall within the scope of the Toy Safety Directive.

The scope of this standard is limited to sewn-on button, toggle buttons and tack buttons.

Assessment of other garment components are considered in:

- FprCEN/TS 17394-3, Safety of Children's Clothing - Security of Attachment of metal mechanically applied press fasteners - Test method, or
- FprCEN/TS 17394-4, Safety of Children's clothing - Security of attachment of components except buttons and metal mechanically applied fasteners - Test method

Performance recommendations are provided in FprCEN/TS 17394-1, Textiles and textile products - Safety of children's clothing - Security of attachment of attached components to Infants' clothing - Specification

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN ISO 139, *Textiles - Standard atmospheres for conditioning and testing (ISO 139)*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1
child or young person
 person aged from birth up to age 14 years (that is up to and including 13 years and 11 months) which includes all boys of height up to 182 cm and all girls of height up to 176 cm

[SOURCE: EN 14682:2014, merged Clauses 2.1 and 2.2]

3.2
children's clothing
 all garments intended by design, production route or selling route to be worn by children up to the age of 14 years

[SOURCE: EN 14682:2014, 2.3]

3.3
sewn-on button
 knob or disc which can be attached to the garment by means of, for example, a sewing thread

Note 1 to entry: The sewn-on button may be a means of fastening or decoration.

3.4
toggle button
 cylindrical, elliptical or similar -shaped button, made from hard material often wood, plastic or horn, often attached to the garment by means of passing a cord or sewing thread through one or more holes in the toggle button

Note 1 to entry: Toggle button may be a means of fastening or decoration.

3.5
tack button
 fastening or decorative device comprising a button with a hollow shank on the back and a separate sharp tack, which is attached to a garment by pushing the sharp end of the tack through the fabric from the reverse side into the shank of the button

Note 1 to entry: Tack buttons are also known as stud buttons.

3.6
garment assembly
 section of a garment, made under production conditions, using the production equipment and the components that are to be used in production

[SOURCE: CEN/TR 16792:2014, 3.10]

4 Method for determination of removal force of buttons

4.1 General

This is a laboratory-based method designed for testing of the security of attachments of buttons of all kinds, both functional and decorative. It may be used to test finished garments or garment assemblies at the relevant stages of garment design and production.

4.2 Principle

An attached button is held in the upper grip of a constant rate of extension (CRE) tensile testing machine and the garment or garment panel to which it is attached is held in the lower grip. The grips are separated at a constant rate until the component is removed from the garment. The removal force and the mode of detachment are recorded.

4.3 Apparatus

4.3.1 Constant rate of extension (CRE) tensile-testing machine

The machine shall be provided with means for indicating and recording the force applied to the test specimen in stretching it to rupture. The metrological confirmation system for the tensile testing machine should be in accordance with EN ISO 10012. Under conditions of use, the accuracy of the machine should be Class 1 in accordance with EN ISO 7500-1. The error of the indicated or recorded maximum force at any point in the range in which the machine is used should not exceed 1 %. The machine should be capable of maintaining a constant rate of extension of (100 ± 10) mm/min.

The machine should be such that it is possible to set the gauge length to any value between 1,0 mm and 75 mm, to an accuracy of 0,5 mm.

4.3.2 Upper Button Box

Button box with a slotted plate is the upper grip used for the testing of buttons. Example of a button box is shown in Figure 1. The box should be of sufficient size to accommodate the attachment to be tested but the shape and dimensions of the box are not critical.

The slotted plate shall be as shown in Figure 2 made from steel of thickness between 1,50 mm to 1,75 mm. The slot width, W , is critical and shall be such that the attachment being tested can slide onto the plate without damaging the means of attachment (e.g. sewing thread or shank).

For tack buttons, the steel plate used should have a thickness between 1,80 mm and 2,10 mm .

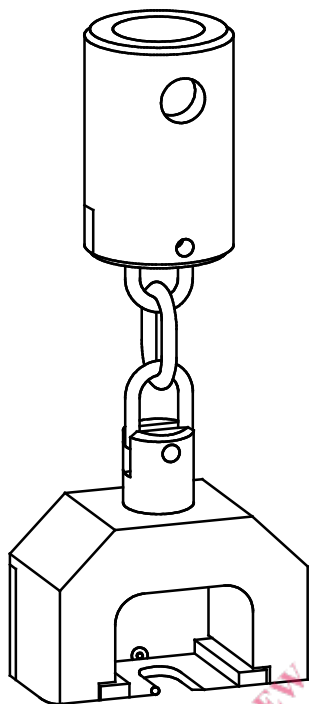


Figure 1 — Example of button box grip

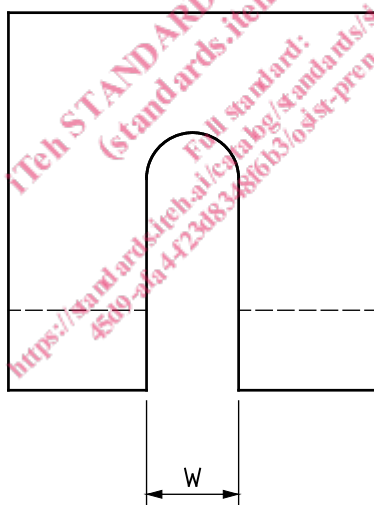


Figure 2 — Slotted plate for use in button box -plan view