

# DRAFT INTERNATIONAL STANDARD

## ISO/DIS 10326-1

ISO/TC 108/SC 4

Secretariat: DIN

Voting begins on:  
2015-08-13

Voting terminates on:  
2015-11-13

---

---

## Mechanical vibration — Laboratory method for evaluating vehicle seat vibration —

### Part 1: Basic requirements

*Vibrations mécaniques — Méthode en laboratoire pour l'évaluation des vibrations du siège de véhicule —  
Partie 1: Exigences de base*

ICS: 13.160; 43.020; 53.100; 65.060.10

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/733e1d27-5eb2-4a3c-800b-8a4f7bc272e4/iso-10326-1-2016>

#### ISO/CEN PARALLEL PROCESSING

This draft has been developed within the International Organization for Standardization (ISO), and processed under the **ISO lead** mode of collaboration as defined in the Vienna Agreement.

This draft is hereby submitted to the ISO member bodies and to the CEN member bodies for a parallel five month enquiry.

Should this draft be accepted, a final draft, established on the basis of comments received, will be submitted to a parallel two-month approval vote in ISO and formal vote in CEN.

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.



Reference number  
ISO/DIS 10326-1:2015(E)

© ISO 2015

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/733e1d27-5eb2-4a3c-800b-8a4f7bc272e4/iso-10326-1-2016>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

## Contents

Page

1	Scope .....	1
2	Normative references .....	1
3	General .....	1
4	Instrumentation .....	2
5	Vibration equipment .....	4
6	Safety requirements .....	4
7	Test conditions .....	5
8	Test input vibration .....	8
9	Test procedure .....	11
10	Acceptance .....	12
11	Test report .....	12
Annex A (informative)	Test method for assessing the ability of a seat suspension to control the effects of impacts caused by over-travel .....	14
Annex B (informative)	Example of a simulated input test signal specified by the PSD .....	21

## Figures

Figure 1	— Location of the accelerometers on the platform (P), on the seat pan (S) and on the backrest (B) .....	2
Figure 2	— A semi rigid mounting disc .....	3
Figure 3	— Suitable posture for testing suspension seats .....	8
Figure A.1	— Vibration exciter platform acceleration waveform $\ddot{x}(t)$ .....	17
Figure A.2	— Example illustration of the test procedure .....	19
Figure B.1	— Example of a simulated input test signal .....	21

## Tables

Table B.1	— Target r.m.s. acceleration on the platform .....	22
-----------	--	----

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 10326-1 was prepared by Technical Committee ISO/TC 108, *Mechanical vibration, shock and condition monitoring*, Subcommittee SC 4, *Human exposure to mechanical vibration and shock*.

This second edition cancels and replaces the first edition (ISO 10326-1:1992 + A1:2007 + A2:2011), which has been editorially revised.

ISO 10326 consists of the following parts, under the general title *Mechanical vibration — Laboratory method for evaluating vehicle seat vibration*

— *Part 1: Basic requirements*

— *Part 2: Application to railway vehicles*

The following part is planned:

— *Part 3: Specification of dynamic dummies for z-axis motion*

## Introduction

Drivers, staff and passengers of vehicles (land, air or water) and mobile machinery are exposed to mechanical vibration which interferes with their comfort, working efficiency and, in some circumstances, safety and health. Such vehicles and mobile machines are often fitted with seats that are designed and made in accordance with current state-of-the-art with regard to their capacity to control or reduce transmitted whole-body vibration.

To assist in the development of such seats, specific test codes have been, or are being, produced to evaluate the performance of seats. The following basic requirements have therefore been developed to give guidance for the specification of laboratory testing of vibration transmission through a vehicle seat to the occupant, and for the evaluation of the ability of a seat to control the shock arising from over-travel of the suspension.

The seat constitutes the last stage of suspension before the driver. To be efficient at attenuating the vibration, the suspension seat should be chosen according to the dynamic characteristics of the vehicle. Any performance criteria provided should be set in accordance with what is attainable using best design practice. Such criteria do not necessarily ensure the complete protection of the operator against risks associated with exposure to vibration and shock which are generally believed to be risk of spinal injury.

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/733e1d77-5eb2-4a3c-800b-8a4f7bc272e4/iso-10326-1-2016>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/733e1d27-5eb2-4a3c-800b-8a4f7bc272e4/iso-10326-1-2016>

# Mechanical vibration — Laboratory method for evaluating vehicle seat vibration — Part 1: Basic requirements

## 1 Scope

This part of ISO 10326 specifies basic requirements for the laboratory testing of vibration transmission through a vehicle seat to the occupant. These methods for measurement and analysis make it possible to compare test results from different laboratories for equivalent seats.

It specifies the test method, the instrumentation requirements, the measuring assessment method and the way to report the test result.

This part of ISO 10326 applies to specific laboratory seat tests which evaluate vibration transmission to the occupants of any type of seat used in vehicles and mobile off-road machinery.

Application standards for specific vehicles should refer to this part of ISO 10326 when defining the test input vibration that is typical for the vibration characteristics of the type or class of vehicle or machinery in which the seat is to be fitted.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2631-1, *Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration — Part 1: General requirements*

ISO 5347 (all parts), *Methods for the calibration of vibration and shock pick-ups*

ISO 8041, *Human response to vibration — Measuring instrumentation*

ISO 13090-1, *Mechanical vibration and shock — Guidance on safety aspects of tests and experiments with people — Part 1: Exposure to whole-body mechanical vibration and repeated shock*

ISO 16063 (all parts), *Methods for the calibration of vibration and shock transducers*

## 3 General

The measurement and assessment methods given in this part of ISO 10326 comply with the present practice standardized in ISO 2631-1. The measuring equipment and the frequency weightings shall be in accordance with ISO 8041.

The primary test for the vibration characteristics of the seat involves measurements under conditions which simulate the range of actual uses of a vehicle or machine. For applications where occasional severe shocks or transient vibration can be expected (and in particular for seats whose suspension travel is short, such as those intended for use on industrial trucks or off-road vehicles), in addition to the damping test, a secondary

test is required to ensure that the seat responds acceptably. Machinery-specific standards shall give guidance on the need for this secondary test which comprises a method for assessing the accelerations associated with impact with the suspension end-stops when over-travel occurs. The test is described in Annex A.

In order to make tests in both horizontal directions,  $x$  and  $y$ , the seat may be turned 90° on the platform.

## 4 Instrumentation

### 4.1 Acceleration transducers

The measuring systems selected for the evaluation of vibration at the seat mounting base or platform of the vibration simulator and that selected for the evaluation of vibration transmitted to the seat occupant, or to an inert mass when used, shall have similar characteristics.

The characteristics of the vibration measuring system, accelerometers, signal conditioning and data acquisition equipment, including recording devices, shall be specified in the relevant application standard, especially the dynamic range, sensitivity, accuracy, linearity and overload capacity.

### 4.2 Transducer mounting

#### 4.2.1 General

One accelerometer shall be located on the platform (P) at the place of the vibration transmission to the seat. The other accelerometer(s) shall be located at the interface between the human body and the seat, at either the seat pan (S) and/or the backrest (B) (see Figure 1).

Dimensions in millimetres

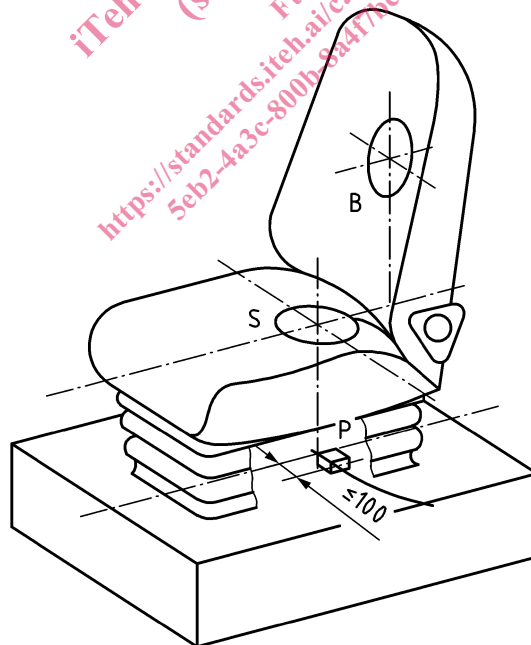


Figure 1 — Location of the accelerometers on the platform (P), on the seat pan (S) and on the backrest (B)



#### 4.2.2 Transducer mounting on the platform

The accelerometer on the platform shall be located within a circle with a diameter of 200 mm centred directly below the seat accelerometer. The measuring directions shall be aligned parallel to the movement of the platform.

#### 4.2.3 Transducer mounting on the seat pan and/or backrest

The accelerometers on the seat pan shall be attached in the centre of a mounting disc with a total diameter of  $250 \text{ mm} \pm 50 \text{ mm}$ . The disc shall be as thin as possible (see Figure 2). The height shall not be more than 12 mm. This semi-rigid mounting disc of approximately 80 to 90 durometer units (A-scale) moulded rubber or plastics material shall have a centre cavity in which to place the accelerometers. The accelerometers shall be attached to a thin metal disc with a thickness of  $1,5 \text{ mm} \pm 0,2 \text{ mm}$  and a diameter of  $75 \text{ mm} \pm 5 \text{ mm}$ .

The mounting disc shall be placed on the surface of the seat pan and taped to the cushion in such a way that the accelerometers are located midway between the ischial tuberosities of the seat occupant with a tolerance to be defined in the relevant application standards. Alternative positioning of the disc may be recommended for certain applications. Any variation from the position here defined shall be specified in application standards.

When tests are performed without a person sitting on the seat, e.g. during damping tests, the disc shall be placed in the same position as if a person were seated in the seat.

If measurements are made on the backrest, the accelerometers shall be (horizontally) located in the vertical longitudinal plane through the centre-line of the seat. The relevant application standards shall specify the vertical position of the accelerometers. The measurement axes shall be aligned parallel to the basicentric coordinate system.

Besides the semi-rigid mounting disc recommended for soft or highly countoured cushions, a rigid disc with a generally flat surface or an individual-form design may be used. Such discs may be, for instance, required for testing rail vehicle passenger seats. The transducer mounting should be made of low-mass materials, so that the resonant frequency of the mounting is at least four times the highest frequency specified for the test.

For practical reasons, it is usually not possible to align perfectly the accelerometers in the disc with the axes of motion of the platform. In a tolerance range within  $15^\circ$  of the appropriate axes, the accelerometers may be considered as aligned parallel to the axes of interest. For deviations greater than  $15^\circ$ , acceleration should be measured along two axes and the acceleration vector sum along the axis of interest should be calculated.

Dimensions in millimetres

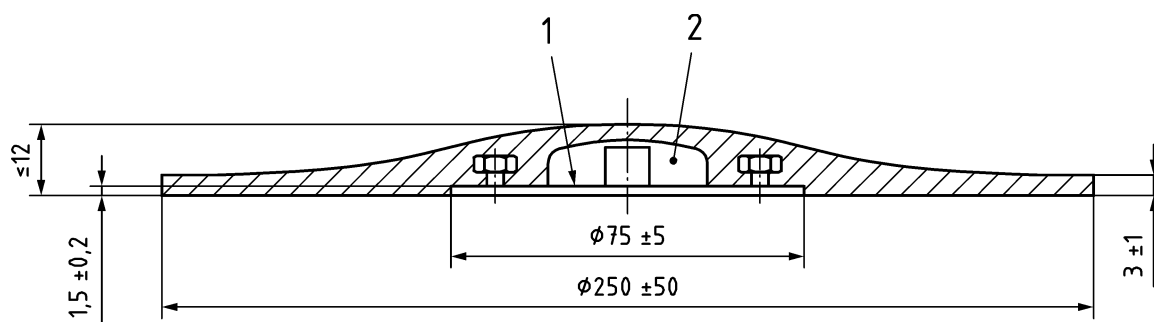


Figure 2 — A semi rigid mounting disc

#### 4.3 Frequency weighting

Frequency weighting shall be in accordance with ISO 8041.

#### 4.4 Calibration

The instrumentation shall be calibrated in accordance with ISO 16063-1 and, depending on the type of measuring system used, to the relevant part of ISO 5347 or ISO 16063.

It is recommended to check the whole measuring chain following the specifications given in ISO 8041.

Calibration shall be made before and after each test series.

Where necessary, the output from each accelerometer amplifier shall be zeroed after mounting the accelerometers in the test position.

### 5 Vibration equipment

#### 5.1 Physical characteristics

The minimum equipment required is a vibrator capable of driving the platform in the vertical and/or horizontal directions. The dynamic response of the exciter shall be capable of exciting the seat with the seated test person and additional equipment, in accordance with the specified test input vibration.

Attributes of performance to be specified include frequency range and displacement capability in each of the required directions.

Application standards shall specify the lowest acceptable resonance frequency of the platform, the acceptable cross-axis motion of the platform and the frequency range for which this applies.

Application standards shall specify requirements for test stand dimensions and equipment to ensure that these are adequate for each particular application.

NOTE It has been observed that the use of certain equipment (e.g. a steering wheel, pedals, etc.) may lower the repeatability of the results.

#### 5.2 Control system

The frequency response characteristics of the vibration test system shall be compensated for to ensure that the power spectral density (PSD) and the probability density function (PDF) of the acceleration amplitudes of the vibration at the seat mounting base comply with the requirements of the specified test input vibration.

### 6 Safety requirements

The guidance on safety requirements with regard to tests in which people are exposed to mechanical vibration and repeated shock as given in ISO 13090-1 shall be followed.

Specific safety requirements shall be considered when the relevant application standard is being developed.