



**SLOVENSKI STANDARD**  
**SIST EN 511:2006**  
**01-julij-2006**

**BUXca Yý U.**  
**SIST EN 511:1996**

---

**Fc\_Uj ]W'nU'nUý ]lc`dfYX`a fUnca**

Protective gloves against cold

Schutzhandschuhe gegen Kälte

Gants de protection contre le froid

**STANDARD PREVIEW**  
**(standards.iteh.ai)**

**Ta slovenski standard je istoveten z: EN 511:2006**

[SIST EN 511:2006](#)

<https://standards.iteh.ai/catalog/standards/sist/069d7fd9-8bb0-4c27-8e8f-1f8e75418bd0/sist-en-511-2006>

---

**ICS:**

13.340.40

**SIST EN 511:2006**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 511:2006

<https://standards.iteh.ai/catalog/standards/sist/069d7fd9-8bb0-4c27-8e8f-1f8e75418bd0/sist-en-511-2006>

English Version

## Protective gloves against cold

Gants de protection contre le froid

Schutzhandschuhe gegen Kälte

This European Standard was approved by CEN on 9 March 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

(standards.iteh.ai)

SIST EN 511:2006

<https://standards.iteh.ai/catalog/standards/sist/069d7fd9-8bb0-4c27-8e8f-1f8e75418bd0/sist-en-511-2006>



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

<b>Contents</b>		<b>Page</b>
<b>1</b>	<b>Scope .....</b>	<b>4</b>
<b>2</b>	<b>Normative references .....</b>	<b>4</b>
<b>3</b>	<b>General requirements .....</b>	<b>4</b>
<b>4</b>	<b>Performance requirements.....</b>	<b>4</b>
<b>5</b>	<b>Test methods.....</b>	<b>6</b>
<b>6</b>	<b>Marking.....</b>	<b>9</b>
<b>7</b>	<b>Information supplied by the manufacturer.....</b>	<b>9</b>
	<b>Annex A (normative) Convective cold — Description of test apparatus .....</b>	<b>10</b>
	<b>Annex B (informative) Protection against cold according to the application .....</b>	<b>13</b>
	<b>Annex C (informative) Uncertainties of measurement and results interpretation .....</b>	<b>15</b>
	<b>Annex D (informative) Significant technical changes between this European Standard and the previous edition .....</b>	<b>16</b>
	<b>Annex ZA (informative) Relationship between this European Standard and the Essential Requirements of EU Directive 89/686/EEC.....</b>	<b>17</b>

**(standards.iteh.ai)**

SIST EN 511:2006

<https://standards.iteh.ai/catalog/standards/sist/069d7fd9-8bb0-4c27-8e8f-1f8e75418bd0/sist-en-511-2006>

## Foreword

This European Standard (EN 511:2006) has been prepared by Technical Committee CEN/TC 162 “Protective clothing including hand and arm protection and lifejackets”, the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2006, and conflicting national standards shall be withdrawn at the latest by October 2006.

This European Standard supersedes EN 511:1994.

Annex D provides details of significant technical changes between this European Standard and the previous edition EN 511:1994.

This European Standard has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive 89/686/EEC.

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this European Standard.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

[SIST EN 511:2006](https://standards.iteh.ai/catalog/standards/sist/069d7fd9-8bb0-4c27-8e8f-1f8e75418bd0/sist-en-511-2006)

<https://standards.iteh.ai/catalog/standards/sist/069d7fd9-8bb0-4c27-8e8f-1f8e75418bd0/sist-en-511-2006>

## 1 Scope

This European Standard specifies the requirements and test methods for gloves which protect against convective and conductive cold down to  $-50\text{ }^{\circ}\text{C}$ . This cold can be linked to the climatic conditions or an industrial activity. The specific values of the different performance levels are decided by the special requirements for each class of risk or the special areas of application. Product tests may only give performance levels and not levels of protection.

## 2 Normative references

The following referenced documents are indispensable for the application of this European Standard. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 388, *Protective gloves against mechanical risks*

EN 420, *Protective gloves — General requirements and test methods*

EN ISO 7854:1997, *Rubber- or plastics-coated fabrics — Determination of resistance to damage by flexing (ISO 7854:1995)*

ISO 4675, *Rubber- or plastics-coated fabrics — Low-temperature bend test*

ISO 5085-1, *Textiles — Determination of thermal resistance — Part 1: Low thermal resistance*

ISO 7000, *Graphical symbols for use on equipment — Index and synopsis*

ISO 15383, *Protective gloves for firefighters — Laboratory test methods and performance requirements*

## 3 General requirements

These gloves shall meet all the applicable requirements of EN 420.

## 4 Performance requirements

### 4.1 Mechanical requirements

The gloves shall at least comply with performance level 1 of EN 388 in abrasion and tear resistance. This minimum requirement can be different according to the levels of protection against cold (see 4.5 and 4.6).

### 4.2 Flexibility behaviour

When tested in accordance with 5.2 there shall not be any cracks. This test is not necessary for uncoated materials.

### 4.3 Water penetration

The gloves shall be tested according to 5.3.

A level of performance of 1 shall be indicated when no leakage is seen at the end of the testing period. If this requirement is not passed, then a performance level of 0 shall be indicated, and a warning stating that the

glove may lose its insulative properties when wet shall be added in the information supplied by the manufacturer (see Clause 7).

#### 4.4 Extreme cold flexibility test

When tested in accordance with 5.4 no crack shall appear at the fold. This test shall be performed on gloves designed to protect at temperatures below  $-30\text{ }^{\circ}\text{C}$ .

#### 4.5 Convective cold

When tested in accordance with 5.5, the thermal insulation properties of the glove shall comply with the values given in Table 1.

**Table 1 — Thermal insulation values**

Performance level	Thermal insulation $I_{TR}$ in $\text{m}^2\text{ K/W}$
1	$0,10 \leq I_{TR} < 0,15$
2	$0,15 \leq I_{TR} < 0,22$
3	$0,22 \leq I_{TR} < 0,30$
4	$0,30 \leq I_{TR}$

For a convective cold performance level of 2 to 4, the product shall record at least level 2 in abrasion and tear resistance according to EN 388, otherwise the maximum convective cold performance that shall be reported is level 1.

#### 4.6 Contact cold

SIST EN 511:2006

<https://standards.iteh.ai/catalog/standards/sist/069d7fd9-8bb0-4c27-8e8f-1fb75d18bd0/sist-en-511-2006>

When tested in accordance with 5.6, the thermal resistance properties of the material shall comply with the values given in Table 2.

**Table 2 — Thermal resistance values**

Performance level	Thermal resistance $R$ in $\text{m}^2\text{ K/W}$
1	$0,025 \leq R < 0,050$
2	$0,050 \leq R < 0,100$
3	$0,100 \leq R < 0,150$
4	$0,150 \leq R$

For a contact cold performance level of 2 to 4, the product shall record at least level 2 in abrasion and tear resistance according to EN 388, otherwise the maximum contact cold performance that shall be reported is level 1.

## 5 Test methods

### 5.1 Conditioning

Except for the convective cold test, before testing, the samples shall be stored for a minimum of 48 h in the following standard atmosphere:

temperature (23 ± 2) °C;

relative humidity (50 ± 5) %.

The test shall be preferably carried out in this atmosphere. If the test is carried out under different climatic conditions then it should be started within 3 min of the time the samples were removed from the standard atmosphere.

For protective gloves with a multi-layer construction the test shall be carried out on all layers simultaneously, even if these, when removed, are not connected to one another (see 5.5).

### 5.2 Flexibility behaviour

The test shall be carried out in accordance with Method A of EN ISO 7854:1997 at a test temperature of (-20 ± 2) °C or an alternative temperature as specified by the glove's manufacturer.

- The number of cycles shall be 10 000.
- From each palm of a pair of protective gloves two samples shall be taken (four samples in total).
- If the direction of manufacture of the material is recognizable then one sample shall be so taken that the longitudinal axis lies in the direction of the manufacture and one in the direction at right angles to it.
- If the direction of manufacture is not given and one cannot be established then the two samples are taken in two directions at right angles to one another.
- The samples are taken without seams. If this is not possible then the sample is taken in such a way that the seams lie, during the test, in the area of the clip and do not influence the bending.

### 5.3 Water penetration

The test shall be carried out according to the whole glove integrity test described in ISO 15383, with complete immersion of the glove up to the wrist line only.

### 5.4 Extreme cold flexibility

The test shall be carried out in accordance with ISO 4675 with a test temperature of (-50 ± 2) °C.

- From each palm and back of a pair of gloves a sample will be taken (four samples in total).
- If the direction of manufacture of the material is recognizable then one sample shall be taken so that the longitudinal axis lies in the direction of manufacture and one in the direction at right angles to it.
- If the direction of manufacture is not given and one cannot be established then the two samples are taken in two directions at right angles to one another.



## 5.5 Convective cold

### 5.5.1 Principle

The thermal insulation of a handwear is determined by measuring the power required to maintain a constant temperature gradient between the surface of a heated, full-scale hand model and the ambient atmosphere.

Design and construction of the hand shall achieve the same constant temperature over the whole hand surface (maximum deviation as specified in A.4).

The gloves shall be stored at test temperature for at least 24 h prior to testing.

The heat input to the hand shall be sufficient to maintain a mean hand temperature in each zone in the range 30 °C to 35 °C at an ambient temperature, which is at least 20 °C lower.

### 5.5.2 Apparatus

The test apparatus consists of:

- hand model;
- climatic room;
- measuring equipment.

See Annex A.

### 5.5.3 Test sample

The test sample shall be of size 9 (see EN 420).

### 5.5.4 Procedure

The hand model is dressed with the test glove and placed vertically, fingers down in the test zone of the climatic room.

The ambient temperature ( $T_A$ ) is set sufficiently low to meet the requirements of Annex A. The air velocity is kept at  $(4 \pm 0,5)$  m/s and relative humidity  $(50 \pm 5)$  %. Alternative conditions may be used provided correlation between the results obtained is demonstrated.

When the temperature of the hand ( $T_{\text{Hand}}$ ) and power consumption ( $Q_{\text{Hand}}$ ) have reached a steady state, the measurements are taken of their average values for a period of 10 min.

The resultant thermal insulation is calculated by:

$$I_{\text{TR}} = \frac{T_{\text{Hand}} - T_A}{Q_{\text{Hand}}}$$

$I_{\text{TR}}$  is the resistance to dry heat loss from the hand, which includes the resistance provided by the handwear and the air layer around the dressed model;

$T_{\text{Hand}}$  is the mean surface temperature of the measuring zone of the hand, in °C;

$T_A$  is the mean temperature of the air in the climatic room, in °C;

$Q_{\text{Hand}}$  is the measured power supply to the measuring zone of the hand during steady state, in W/m<sup>2</sup>.

iTech STANDARD PREVIEW  
(standards.iteh.ai)

SIST EN 511:2006  
<https://standards.iteh.ai/catalog/standards/sist/069d7fd9-8bb0-4c27-8e8f-1f8e75418bd0/sist-en-511-2006>

The average of two independent measurements is used as the mean value for the test glove.

### **5.6 Contact cold**

The test shall be carried out in accordance with ISO 5085-1 using a pressure of 6,9 kPa and expressing the results in m<sup>2</sup> K/W.

Two representative samples of the material used to construct the palm side of the fingers of the glove shall be tested. If this is not possible, then sufficient samples shall be taken from the palm side of a number of gloves. If the palm side of the glove is not uniform, then samples of the different parts of the glove shall be tested and the lowest mean value quoted.

NOTE an alternative test method may be used provided it has been cross-validated against the method described above.

## **iTeh STANDARD PREVIEW (standards.iteh.ai)**


[SIST EN 511:2006](https://standards.iteh.ai/catalog/standards/sist/069d7fd9-8bb0-4c27-8e8f-1f8e75418bd0/sist-en-511-2006)

<https://standards.iteh.ai/catalog/standards/sist/069d7fd9-8bb0-4c27-8e8f-1f8e75418bd0/sist-en-511-2006>

## 6 Marking

The marking shall comply with the appropriate clause of EN 420.

In addition, the pictogram ISO 7000-2412 for the cold protective gloves shall be included with reference of the standard and the performance levels indicated as shown in the example hereunder:

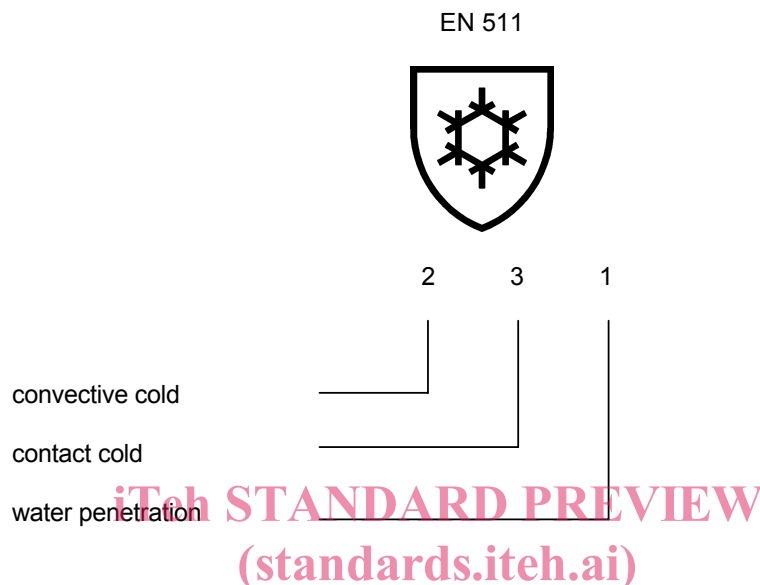

The pictogram shall be used only if a minimum level of 1 is obtained for convective cold according to 4.5 or contact cold according to 4.6.

The sign X, instead of a number, means that the glove is not designed for the use covered by the corresponding test.

## 7 Information supplied by the manufacturer

The information supplied by the manufacturer shall be according to the appropriate clause of EN 420.

If the glove consists of separate parts which are not permanently interconnected, the manufacturer shall indicate that the performance levels and the protection only apply to the complete assembly.

The manufacturer shall provide information or indicate where information can be obtained on the maximum permissible user exposure, e.g. temperature, duration. Annex B may be used as a help.

If the glove is not reaching a level of performance of 1 according to the water penetration test, then a warning stating that the glove may lose its insulative properties when wet shall be added (see 4.3).