
Aeronavtika - Kabelske spojke za vezalno pasovje - 005. del: Plastične vezice s kovinskimi zapornimi napravami, s stalno delovno temperaturo od -65 °C do 105 °C in -65 °C do 150 °C - Standard za proizvod

Aerospace series - Cable ties for harnesses - Part 005: Plastic cable ties with metallic locking devices, operating temperatures -65 °C to 105 °C and -65 °C to 150 °C - Product standard

Luft- und Raumfahrt - Befestigungsbänder für Leitungsbündel - Teil 005: Befestigungsbänder aus Kunststoff mit Metallzunge, betriebstemperatur -65 °C à 105 °C bis -65 °C à 150 °C - Produktnorm

[oSIST prEN 4056-005:2021](https://standards.itih.ai/catalog/standards/sist/4cc0a2a0-2f22-45d9-8e57-80e1993e2042/osist-pr-en-4056-005-2021)

Série aérospatiale - Frettes de câblage pour harnais - Partie 005 : Frettes en plastique avec languette métallique, températures d'utilisation -65 °C à 105 °C et 65 °C à 105 °C - Norme de produit

Ta slovenski standard je istoveten z: prEN 4056-005

ICS:

49.060	Letalska in vesoljska električna oprema in sistemi	Aerospace electric equipment and systems
--------	--	--

oSIST prEN 4056-005:2021

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[oSIST prEN 4056-005:2021](#)

<https://standards.iteh.ai/catalog/standards/sist/4cc0a2a0-2f22-45d9-8e57-80b1993840a2/osist-pren-4056-005-2021>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 4056-005

April 2021

ICS 49.060

English Version

**Aerospace series - Cable ties for harnesses - Part 005:
Plastic cable ties with metallic locking devices, operating
temperatures -65 °C to 105 °C and -65 °C to 150 °C -
Product standard**

Série aérospatiale - Frettes de câblage pour harnais -
Partie 005 : Frettes en plastique avec languette
métallique, températures d'utilisation -65 °C à 105 °C
et 65 °C à 105 °C - Norme de produit

Luft- und Raumfahrt - Befestigungsbänder für
Leitungsbündel - Teil 005: Befestigungsbänder aus
Kunststoff mit Metallzunge, betriebstemperatur -65 °C à
105 °C bis -65 °C à 150 °C - Produktnorm

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee ASD-STAN.

iTeh STANDARD PREVIEW

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents	Page
European foreword	3
1 Scope.....	4
2 Normative references.....	4
3 Terms and definitions.....	4
4 Required characteristics	4
4.1 Dimensions.....	4
4.2 Material	6
4.2.1 Temperature rating (type)	6
4.2.2 Flammability class.....	6
4.2.3 Colour.....	6
4.2.4 Smoke density and toxicity	6
4.3 UV-resistant cable ties	6
4.4 Application tool	6
5 Tests and requirements	7
6 Quality assurance	9
7 Designation	9
8 Marking	9
9 Packaging and storage	9

iTech STANDARD PREVIEW
(standards.itech.ai)

[oSIST prEN 4056-005:2021](https://standards.itech.ai/catalog/standards/sist/4cc0a2a0-2f22-45d9-8c57-80b1993840a2/osist-pren-4056-005-2021)

[https://standards.itech.ai/catalog/standards/sist/4cc0a2a0-2f22-45d9-8c57-](https://standards.itech.ai/catalog/standards/sist/4cc0a2a0-2f22-45d9-8c57-80b1993840a2/osist-pren-4056-005-2021)

[80b1993840a2/osist-pren-4056-005-2021](https://standards.itech.ai/catalog/standards/sist/4cc0a2a0-2f22-45d9-8c57-80b1993840a2/osist-pren-4056-005-2021)

European foreword

This document (prEN 4056-005:2021) has been prepared by the Aerospace and Defence Industries Association of Europe — Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this document has received the approval of the National Associations and the Official Services of the member countries of ASD-STAN, prior to its presentation to CEN.

This document is currently submitted to the Enquiry.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN 4056-005:2021](https://standards.iteh.ai/catalog/standards/sist/4cc0a2a0-2f22-45d9-8e57-80b1993840a2/osist-pren-4056-005-2021)

<https://standards.iteh.ai/catalog/standards/sist/4cc0a2a0-2f22-45d9-8e57-80b1993840a2/osist-pren-4056-005-2021>

prEN 4056-005:2021 (E)**1 Scope**

This document defines the required characteristics of cable ties with a metallic locking device manufactured from plastics material, for installation under controlled tension on aircraft cable harnesses.

It is used together with EN 4056-001.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2825, *Aerospace series - Burning behaviour of non metallic materials under the influence of radiating heat and flames - Determination of smoke density*

EN 2826, *Aerospace series - Burning behaviour of non metallic materials under the influence of radiating heat and flames - Determination of gas components in the smoke*

EN 4056-001:2015, *Aerospace series - Cable ties for harnesses - Part 001: Technical specification*

EN 4057, *(all parts) Aerospace series - Cable ties for harnesses - Test methods¹⁾*

MS 90387, *Tool, hand, adjustable for plastic and metal tiedown straps*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 4056-001 apply.


ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <http://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 Required characteristics**4.1 Dimensions**

See Figure 1 and Table 1.

¹⁾ And all its parts quoted in this document.

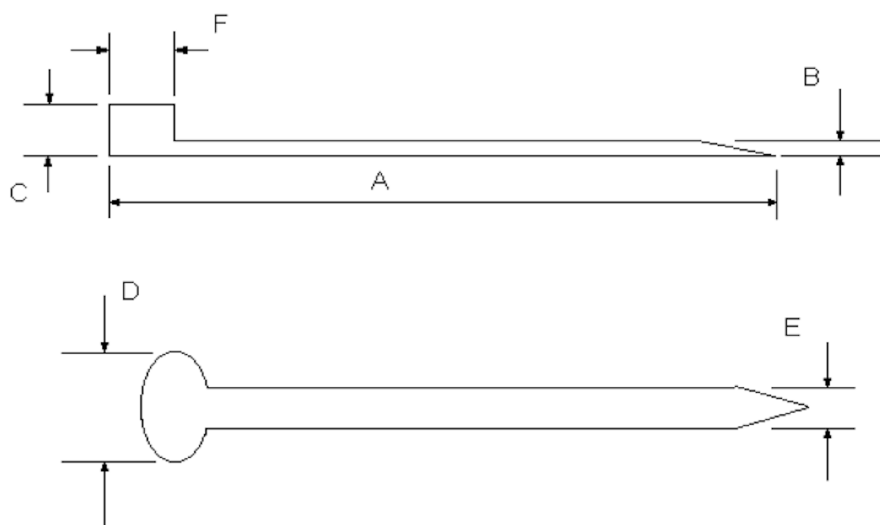

Key

- A Length of tie
- B Thickness of strap
- E Width of strap
- C Height
- Head dimensions**
- F Length
- D Width

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Figure 1 — Cable tie

oSIST prEN 4056-005:2021
Table 1 — Dimensions and mass
<https://standards.iteh.ai/catalog/standards/sist/4cc0a2a0-2f22-45d9-8e57-80b1993840a2/osist-pr-en-4056-005-2021>

Size code	Recommended bundle diameter		Length of tie	Thickness of strap	Width of strap		Head dimensions			Loop tensile strength	Mass of 10 ties related to minimum length
							Length	Width	Height		
							F	D	C		
mm		mm	mm	mm		mm	mm	mm	N	g	
min.	max.	min.	max.	min.	max.	max.	max.	max.	min.	max.	
P	1,6	20	92	1,1	2,3	2,5	4,4	5,0	4,0	80	3,0
R	1,6	50	190	1,3	3,3	3,8	5,6	6,6	5,0	120	9,5
S	1,6	80	280	1,3	4,4	4,8	7,0	8,6	6,0	220	21,0
T	5,0	100	335	1,9	7,4	7,8	9,5	13,5	8,3	530	65,0
U	1,6	110	360	1,3	4,4	4,8	7,0	8,5	6,0	220	28,0
V	5,0	130	456	1,9	6,8	7n8	9,5	13,5	8,3	530	86,0

prEN 4056-005:2021 (E)**4.2 Material****4.2.1 Temperature rating (type)**

The ties shall be capable of use within the following temperature ranges:

- Type 1: -65 °C to 105 °C
- Type 2: -65 °C to 150 °C

4.2.2 Flammability class

Available as class 1 and class 2.

See Table 3 for requirements.

4.2.3 Colour

It shall be in accordance with Table 2 of EN 4056-001:2015.

4.2.4 Smoke density and toxicity**4.2.4.1 General**

Materials for cable ties shall satisfy the following requirements when tested to EN 2825 and EN 2826.

4.2.4.2 Smoke density

The maximum specific optical density (average), shall not exceed:

- $D_m = 200$ (flaming mode);

- $D_m = 150$ (non-flaming mode);

4.2.4.3 Toxicity

The average concentration in parts per million (ppm) of the following gas components shall not exceed the following limits after a test duration of 4 min.

Gas component		Limit of concentration (ppm)
Hydrogen Fluoride	HF	100
Hydrogen Chloride	HCl	150
Hydrogen Cyanide	HCN	150
Sulphur Dioxide	SO ₂	100
Hydrogen Sulphide	H ₂ S	100
Nitrous Gases	NO/NO ₂	100
Carbon Monoxide	CO	1 000

4.3 UV-resistant cable ties

UV-resistant cable ties shall meet the requirements of EN 4057-307, given in Table 3.

4.4 Application tool

Cable ties shall be applied using a tensioning tool, as specified in MS 90387, calibrated in accordance with EN 4057-407, ensuring that the application force does not exceed the values shown in Table 2.

Table 2 — Maximum recommended application force

Size code	N
P	60
R	100
S	150
T	150
U	300
V	150

5 Tests and requirements

It shall be in accordance with Table 3 and EN 4056-001.

Table 3 — Tests

EN 4057-	Designation of the test	Requirement
201	Visual examination	There shall be no sharp or abrasive external edges.
202	Examination of mass and dimensions	The mass and dimensions shall be in accordance with Table 1 of this document.
301	Salt mist test	The ties shall meet the loop tensile requirements as stated in Table 1 of this document.
302	Flammability	After removal of the burner from the specimen, any flame shall extinguish within 5 s. If there are no flaming droplets (or particles) during the test, and the flame extinguishes within 5 s, the specimen will be classified as class 1. If there are flaming droplets (or particles) but all the flames extinguish within 5 s, the specimen will be classified as class 2.
303	Resistance to fluids	All the specimens shall meet the minimum loop tensile strength as stated in Table 1 of this document.
304	Loop tensile strength at maximum working temperature	All specimens shall meet at least 60 % of the minimum loop tensile strength as stated in Table 1 of this document.
305	Colour fastness (applicable only to coloured ties)	The colour fastness of the specimen shall not be less than wool standard number 6.

prEN 4056-005:2021 (E)

306	Heat ageing test	The tensile strength shall not be lower than that specified in the appropriate product standard. The elongation at break of the aged flat samples shall not be less than 75 % of the elongation of the flat unaged samples, as defined in the product standard.	
307	Resistance to ultraviolet radiation	All the specimens shall meet at least 95 % of the requirement for part EN 4057-401. The average elongation at break of the exposed specimens shall not be less than 60 % of the figure for the unexposed samples.	
401	Loop tensile strength	All the specimens shall meet the minimum loop tensile strength for their size code, as stated in Table 1 of this document.	
402	Life cycle	<p>After the vibration test:</p> <ol style="list-style-type: none"> 1) There shall be no damage to the cable insulation when viewed with a 10 magnification aid times. 2) The specimens shall be examined for cracks, breaking and/or release of the locking device during removal from the vibration test harness. 3) All the specimens shall meet the minimum loop tensile strength as stated in Table 1 of this document. 	
404	Low temperature installation	All the specimens shall meet the minimum loop tensile strength as stated in Table 1 of this document.	
405	Compass safe distance	The samples shall have a minimum compass safe distance of 125 mm.	
406	Locking device retention (ties containing metal locking barbs only)	The minimum locking device retention force shall, be determined according to the rated loop tensile strength, as given below:	
		Loop tensile	Retention force (N)
		80	5
		135	10
		220	10
530	20		
407	Verification of application tool settings	See Table 2 of this document (± 5 %).	