
**Hand-held portable power tools —
Test methods for evaluation of
vibration emission —**

**Part 1:
Angle and vertical grinders**

AMENDMENT 1: Cupped wire brushes

(standards.iteh.ai)

*Machines à moteur portatives — Méthodes d'essai pour l'évaluation
de l'émission de vibrations —*

ISO 28927-1:2009/Amd 1:2017

Partie 1: Meuleuses verticales et meuleuses d'angles

<https://standards.iteh.ai/catalog/standards/sist/ec671237-2a88-4367-a8ef-618828d00000>

AMENDEMENT 1: Broses métalliques creuses



iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 28927-1:2009/Amd 1:2017](https://standards.iteh.ai/catalog/standards/sist/ec671237-2a88-4367-a8ef-618828d31379/iso-28927-1-2009-amd-1-2017)
<https://standards.iteh.ai/catalog/standards/sist/ec671237-2a88-4367-a8ef-618828d31379/iso-28927-1-2009-amd-1-2017>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

Amendment 1 to ISO 28927-1:2009 was prepared by ISO/TC 118, *Compressors and pneumatic tools, machines and equipment*, Subcommittee SC 3, *Pneumatic tools and machines*.

<https://standards.iteh.ai/catalog/standards/sist/ec671237-2a88-4367-a8ef-618828d31379/iso-28927-1-2009-amd-1-2017>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 28927-1:2009/Amd 1:2017](https://standards.iteh.ai/catalog/standards/sist/ec671237-2a88-4367-a8ef-618828d31379/iso-28927-1-2009-amd-1-2017)

<https://standards.iteh.ai/catalog/standards/sist/ec671237-2a88-4367-a8ef-618828d31379/iso-28927-1-2009-amd-1-2017>

Hand-held portable power tools — Test methods for evaluation of vibration emission —

Part 1: Angle and vertical grinders

AMENDMENT 1: Cupped wire brushes

Page vi, Introduction

Add the following sentence at the end of paragraph 7:

For grinders that are intended to be used with cupped wire brushes, the vibration value is obtained by using a correction factor of 1,6.

Page 1, Scope

Change the final sentence in paragraph 2 to: "It is not applicable to die grinders or straight grinders."

(standards.iteh.ai)

Page 1, Scope

Add "and with wire brushes" in the second paragraph between *super-abrasive products* and *for use on all kinds of materials*.

[ISO 28927-1:2009/Amd 1:2017](https://standards.iteh.ai/catalog/standards/sist/6071257-2a88-4567-abcf-618828d31379/iso-28927-1-2009-amd-1-2017)

<https://standards.iteh.ai/catalog/standards/sist/6071257-2a88-4567-abcf-618828d31379/iso-28927-1-2009-amd-1-2017>

618828d31379/iso-28927-1-2009-amd-1-2017

Page 3, Clause 5

Add the following NOTE after the last list entry in paragraph 4:

NOTE For wheels with a diameter less than 80 mm, see ISO 603-14.

Page 5, Clause 5

Add the following NOTE after Figure 6:

NOTE This document only covers wheel dimensions included in ISO 603-14. For other wheel dimensions, use ISO 20643.

Page 15, 9.2

Add the following in the end of the last paragraph:

(see ISO/TR 27609).

Page 15, 9.2

Add a new subclause, after 9.2:

9.3 Correction factor

For grinders that are intended to be used with cupped wire brushes, the corresponding declared value $a_{hd.brush}$ shall be given, where $a_{hd.brush}$ is obtained by multiplying a_{hd} by a factor of 1,6.

Page 20, C.1

Change the following in the last paragraph:

Test of wheels shall be manufactured in accordance with Figures C.1 to C.5.

Page 23, Annex C

Add a new subclause, C.3.2:

C.3.2 Type 27 depressed centre test wheels, alternative design

This alternative design is made for an easier calibration of the unbalance. By mounting a calibrating screw, and adjusting the unbalance wheel to balance, the unbalance will be more accurate and easy to make.

The unbalance is generated by machining one threaded hole in the aluminium wheel, in addition to the unbalance hole. During the adjustment, remove material from the unbalance wheel until the test wheel, with the calibration screw mounted, is in balance.

For the alternative type 27 depressed centre test wheels, the unbalances, the diameter of the drilled holes and the radius for the centre of the holes shall be in accordance with Table C.4 and Figure C.4. The holes shall be drilled through.

The calibrating screw has the same unbalance as the unbalance hole and the screw hole together. See Table C.5 for screw dimensions and weights.

The calibrating screws should be removed before the unbalance wheel is mounted on the grinder.


Table C.4 — Unbalance hole dimensions for type 27 test wheels, alternative design

Designation of test wheel	Wheel diameter <i>D</i> mm	Unbalance g·mm ±5 %	Hole diameter <i>e</i> mm	Radius to centre of hole <i>rh</i> mm ±0,05 mm	Thread	Radius to centre of threaded hole <i>rt</i> mm ±0,05 mm
27:80	80	37	8,3	26,5	M6	36
27:100	100	58	8,3	33	M8	45
27:115	115	76	8,9	50	M8	37,5
27:125	125	90	9,6	53	M8	37,5
27:150	150	130	10,6	66	M8	48,5
27:180	180	190	11,5	81	M8	70
27:230	230	305	15,4	84	M8	61
27:300	300	520	16,5	125,2	M8	104

The calibration screws are the screw types given in Table C.5. They are nominally too heavy and need to be adjusted to get the screw weight within the given tolerances.

Table C.5 — Calibration screw dimensions for type 27 test wheels, alternative design

Designation of test wheel	Screw type	In accordance with	Screw mass g ±0,01 g
27:80	M6 × 10	ISO 4026	1,0
27:100	M8 × 8	ISO 4026	1,3
27:115	M8 × 10	ISO 4026	2,0
27:125	M8 × 12	ISO 4026	2,4
27:150	M8 × 12	ISO 4026	2,7
27:180	M8 × 12	ISO 4026	2,7
27:230	M8 × 20	ISO 4026	5,0
27:300	M8 × 20	ISO 4026	5,0

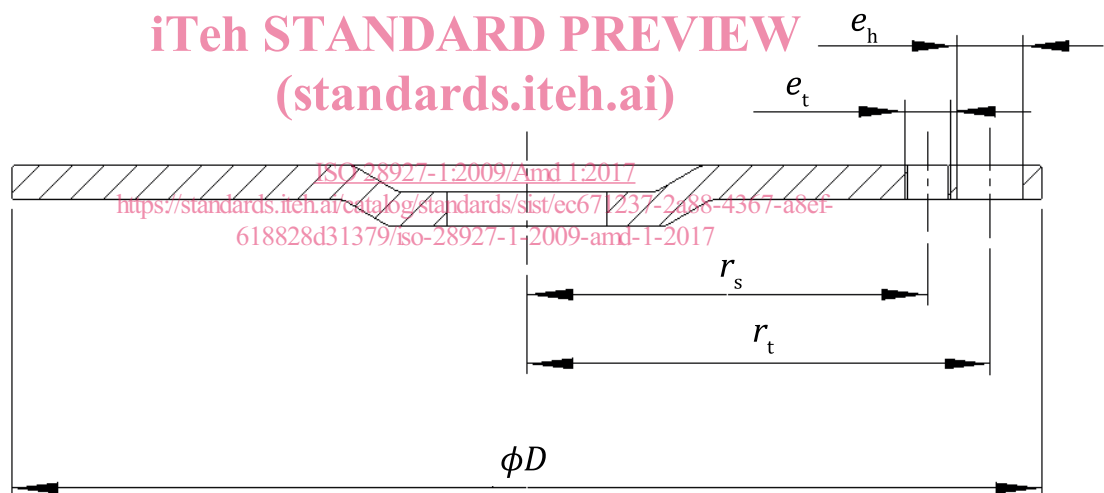

Key

- D wheel diameter
- e_h unbalance hole diameter
- e_t threaded hole diameter
- r_s radius to centre of unbalance hole
- r_t radius to centre of threaded hole

Figure C.4 — Unbalance hole dimensions for type 27 test wheels, alternative design

Page 23, C.3.2

Change and renumber subclause to

C.3.3

Page 23, C.3.2, first paragraph

Change the last references to

Table C.6 and Figure C.5

Page 24, Table C.4

Change the table number to

Table C.6

Page 24, Figure C.4

Change the figure number to

Figure C.5

Page 24, Figure C.4, last key

r_1 radius to centre of front hole shall be changed to

r_2 radius to centre of rear hole

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 28927-1:2009/Amd 1:2017](https://standards.iteh.ai/catalog/standards/sist/ec671237-2a88-4367-a8ef-618828d31379/iso-28927-1-2009-amd-1-2017)

<https://standards.iteh.ai/catalog/standards/sist/ec671237-2a88-4367-a8ef-618828d31379/iso-28927-1-2009-amd-1-2017>

Page 25, C.4

Change title to

C.4 Bushing for type 27 test wheels

Page 25, C.4, first paragraph

Change the references to the table and figure to

Table C.7

See Figure C.6

Page 25, Table C.5

Change table number to

Table C.7

Page 26, Bibliography

Add the following:

[8] Hand-Arm Vibration Technical Report, <http://www.burrtec.co.jp/havs/content.html>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 28927-1:2009/Amd 1:2017](https://standards.iteh.ai/catalog/standards/sist/ec671237-2a88-4367-a8ef-618828d31379/iso-28927-1-2009-amd-1-2017)

<https://standards.iteh.ai/catalog/standards/sist/ec671237-2a88-4367-a8ef-618828d31379/iso-28927-1-2009-amd-1-2017>