

---

**Intelligentni transportni sistemi - Sporočila prometnih in potovalnih informacij prek kodiranih prometnih sporočil - 3. del: Navajanje lokacije za radijski podatkovni sistem (RDS) - Prometni informacijski kanal (RDS-TMC), ki uporablja sistem ALERT-C (ISO/DIS 14819-3:2019)**

Intelligent transport systems - Traffic and travel information messages via traffic message coding - Part 3: Location referencing for Radio Data System - Traffic Message Channel (RDS-TMC) using ALERT-C (ISO/DIS 14819-3:2019)

Intelligente Transportsysteme - Verkehrs- und Reiseinformationen über Verkehrsmeldungskodierung - Teil 3: Ortsreferenzierung für Radiodatensysteme für den digitalen Radiokanal für Verkehrsmeldungen (RDS-TMC) unter Nutzung von ALERT-C (ISO/DIS 14819-3:2019)

Systèmes intelligents de transport - Informations sur le trafic et le tourisme via le codage de messages sur le trafic - Partie 3: Références de localisants pour le système de radiodiffusion de données (RDS) - Canal de messages d'informations sur le trafic (RDS-TMC) avec ALERT-C (ISO/DIS 14819-3:2019)

**Ta slovenski standard je istoveten z: prEN ISO 14819-3**

---

**ICS:**

03.220.20	Cestni transport	Road transport
35.240.60	Uporabniške rešitve IT v prometu	IT applications in transport

**oSIST prEN ISO 14819-3:2019**

**en,fr,de**



# DRAFT INTERNATIONAL STANDARD

## ISO/DIS 14819-3

ISO/TC 204

Secretariat: ANSI

Voting begins on:  
2019-08-23Voting terminates on:  
2019-11-15

### Intelligent transport systems — Traffic and travel information messages via traffic message coding —

Part 3:

### Location referencing for Radio Data System — Traffic Message Channel (RDS-TMC) using ALERT-C

*Systèmes intelligents de transport — Informations sur le trafic et le tourisme via le codage de messages sur le trafic —*

*Partie 3: Références de localisants pour le système de radiodiffusion de données (RDS) — Canal de messages d'informations sur le trafic (RDS-TMC) avec ALERT-C*

ICS: 35.240.60; 03.220.20

(standards.iteh.ai)

SIST EN ISO 14819-3:2021

<https://standards.iteh.ai/catalog/standards/sist/c83a2ceb-96e9-4508-ae9e-512f17e22ebd/sist-en-iso-14819-3-2021>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.

## ISO/CEN PARALLEL PROCESSING



Reference number  
ISO/DIS 14819-3:2019(E)

© ISO 2019

## iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN ISO 14819-3:2021

<https://standards.iteh.ai/catalog/standards/sist/c83a2ceb-96e9-4508-ae9e-512f17e22ebd/sist-en-iso-14819-3-2021>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Fax: +41 22 749 09 47  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword .....	v
Introduction.....	vi
1 Scope .....	1
2 Normative references .....	1
3 Abbreviated terms .....	2
4 Location coding .....	3
4.1 General .....	3
4.2 Location tables .....	3
4.2.1 General .....	3
4.2.2 Versions and versioning of location tables .....	3
4.2.3 Exchanging location tables .....	4
4.2.4 Hierarchical structure .....	4
4.2.5 Location types .....	5
4.2.6 Offsets .....	6
4.2.7 Direction of the road .....	6
4.2.8 Country codes and location table numbers .....	6
4.2.9 Constraints.....	7
4.3 TMC Location categories, types and subtypes .....	7
4.4 Location table content .....	7
4.4.1 General .....	7
4.4.2 Nominal record content .....	7
4.4.3 Road descriptions .....	12
4.4.4 Names .....	12
4.4.5 Upward references .....	12
4.4.6 Offsets .....	12
4.4.7 Urban .....	12
4.4.8 Intersection reference .....	13
4.4.9 WGS 84 co-ordinates .....	13
4.4.10 InterruptsRoad .....	13
4.5 Detailed junction referencing .....	14
4.5.1 Conventional junctions.....	14
4.5.2 Complex junctions .....	14
4.5.3 Detailed coding of link roads .....	14
4.6 Detailed situation locations.....	15
4.6.1 Normal location referencing.....	15
4.6.2 Detailed location referencing .....	15
4.6.3 Precise location referencing .....	15
4.7 One and two way-locations .....	15
4.7.1 Basic principles .....	15
4.7.2 Junctions.....	15
4.7.3 Locations having only an exit or entry and locations occurring on one side only .....	15
4.7.4 DiversPos / DiversionNeg.....	17
Annex A (normative) TMC Location categories, types and subtypes .....	18
A.1 General .....	18
A.2 Area locations .....	18
A.3 Linear locations .....	20
A.4 Point locations .....	22
Annex B (informative) Location Table Identification .....	29

ISO/DIS 14819-3:2019(E)

<b>Annex C (normative) Detailed methods for the usage of location tables .....</b>	<b>32</b>
<b>C.1 Methods for referencing affected road sections .....</b>	<b>32</b>
<b>C.1.1 General.....</b>	<b>32</b>
<b>C.1.2 Pre-defined primary location + extent .....</b>	<b>32</b>
<b>C.1.3 Pre-defined primary and secondary locations .....</b>	<b>33</b>
<b>C.1.4 Distance markers (primary location + extent).....</b>	<b>33</b>
<b>C.1.5 Distance markers (primary + secondary location) .....</b>	<b>34</b>
<b>C.1.6 Primary and secondary locations using pre-defined location, extent and distances .....</b>	<b>34</b>
<b>C.1.7 Primary and secondary locations using pre-defined locations + distances .....</b>	<b>35</b>
<b>C.1.8 Describing the extent of an event in ALERT-C .....</b>	<b>35</b>
<b>C.1.9 Co-ordinates (primary + secondary locations).....</b>	<b>37</b>
<b>C.1.10 Proprietary referencing systems, e.g. GDF .....</b>	<b>37</b>
<b>C.1.11 Text location naming .....</b>	<b>37</b>
<b>C.1.12 Precise location referencing.....</b>	<b>37</b>
<b>C.2 Methods for referencing specific features .....</b>	<b>41</b>
<b>C.2.1 Parking facilities .....</b>	<b>41</b>
<b>C.2.2 Other isolated POIs.....</b>	<b>43</b>
<b>C.2.3 Parallel Roads .....</b>	<b>44</b>
<b>C.3 Methods for identifying and exchanging location tables .....</b>	<b>47</b>
<b>C.3.1 Identifying versions of a location table .....</b>	<b>47</b>
<b>C.3.2 Exchanging location tables – the Location Table Exchange Format.....</b>	<b>47</b>
<b>Annex D (informative) Background information .....</b>	<b>72</b>
<b>D.1 Overall approach.....</b>	<b>72</b>
<b>D.1.1 General.....</b>	<b>72</b>
<b>D.1.2 Pre-defined locations .....</b>	<b>72</b>
<b>D.1.3 GDF features .....</b>	<b>73</b>
<b>Bibliography .....</b>	<b>73</b>

(standards.iteh.ai)

SIST EN ISO 14819-3:2021

<https://standards.iteh.ai/catalog/standards/sist/c83a2ceb-96e9-4508-ae9e-512f17e22ebd/sist-en-iso-14819-3-2021>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. [www.iso.org/directives](http://www.iso.org/directives)

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. [www.iso.org/patents](http://www.iso.org/patents)

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 204, *Intelligent transport systems*.

This third edition cancels and replaces all previous versions.

ISO 14819 consists of the following parts, under the general title *Intelligent transport systems — Traffic and travel information messages via traffic message coding*:

- *Part 1: Coding protocol for Radio Data System — Traffic Message Channel (RDS-TMC)*
- *Part 2: Event and information codes for Radio Data System — Traffic Message Channel (RDS-TMC)*
- *Part 3: Location referencing for Radio Data System — Traffic message Channel (RDS-TMC)*
- *Part 6 (to become deprecated): Encryption and conditional access for the Radio Data System — Traffic Message Channel ALERT C coding*

## Introduction

This document sets out ways of specifying places and positions in traffic and travel information messages, including RDS-TMC messages (the Radio Data System - Traffic Message Channel).

It defines the structure and semantics of location tables for Traffic Information Centres (TICs) and receivers.

a) Traffic and travel messages;

- 1) Traffic and travel information is created and updated in an originating database, by human operators or automated systems. Information is transferred to one or more remote systems by means of messages.
- 2) In this context, a message is a collection of data which is exchanged to convey information for an agreed purpose between two or more parties. Traffic and travel messages are digitally-coded sets of data exchanged by interested parties, which convey information about traffic, travel and/or transport networks. Digital coding can be alphanumeric, as in EDIFACT, or binary, as in RDS-TMC.
- 3) The traffic and travel messages developed in programmes of the European Union are open, non-proprietary proposals for standards intended to serve the public interest by facilitating interconnection and interoperability of the relevant information systems.

b) Location referencing.

Location references provide the means of saying *where* in traffic and travel messages

The location referencing component of a traffic and travel message enables a service provider to indicate the physical location of the event being described. The management of TMC location databases requires on-going maintenance. It is necessary to both manage location database ID allocation for countries implementing TMC services and to validate new and updated location databases when ground features change. These activities are led by service providers who also need to ensure that their end-users are kept up-to-date. The Traveller Information Services Association ([www.tisa.org](http://www.tisa.org)) manages the ID allocation on a worldwide basis. TISA provides location database validation for service providers who generally arrange location database updates on a bi-annual cycle.



# Intelligent transport systems — Traffic and travel information messages via traffic message coding —

## Part 3:

## Location referencing for Radio Data System — Traffic Message Channel (RDS-TMC) using ALERT-C

### 1 Scope

This standard primarily addresses the needs of RDS-TMC ALERT-C messages which are in widespread worldwide use, however, the modular approach used here is intended to facilitate future extension of the location referencing rules to other traffic and travel messaging systems.

The location referencing rules defined in this part of ISO 14819 address the specific requirements of Traffic Message Channel (TMC) systems, which use abbreviated coding formats to provide TTI messages over mobile bearers (e.g. GMS, DAB) or via exchange protocols like DATEX and DATEX II. In particular, the rules address the Radio Data System - Traffic Message Channel (RDS-TMC), a means of providing digitally-coded traffic and travel information to travellers using a silent data channel (RDS) on FM radio stations, based on the ALERT-C protocol.

A certification process is set in place within TISA to validate in detail the submitted location tables. This certification procedure extends the basic rules mentioned in this standard and also applies a best-practice validation. TISA grants a stamp of quality to those location tables that pass a set of tests.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 8859-15:1999, *Information technology — 8-bit single-byte coded graphic character sets — Part 15: Latin alphabet No. 9*

ISO/IEC 10646:2012, *Information technology — Universal Coded Character Set (UCS)*

ISO 14819-1 *Intelligent transport systems — Traffic and travel information messages via traffic message coding — Part 1: Coding protocol for Radio Data System — Traffic Message Channel (RDS-TMC) using ALERT-C*

ISO 14819-2 *Intelligent transport systems – Traffic and Travel information messages via traffic message coding - Part 2: Event and information codes for Radio Data System – Traffic Message Channel (RDS-TMC) using ALERT-C.*

ISO 14819-6 *Intelligent transport systems – Traffic and Travel information messages via traffic message coding - Part 6: Encryption and Conditional Access for Radio Data System (RDS-TMC) using ALERT-C. (to become deprecated),*

**ISO/DIS 14819-3:2019(E)**

ISO 14825:2014 , *Intelligent transport systems — Geographic Data Files (GDF) — Overall data specification (ISO 14825:2004)*

IEC 62106:2018, *Specification of the radio data system (RDS) for VHF/FM sound broadcasting in the frequency range from 64,0 to 108,0 MHz*

TISA SP13011, Backwards compatibility of TMC location tables

TISA SP17005, Guidelines for TMC Conflation

**3 Abbreviated terms**

For the purposes of this document, the following abbreviated terms apply:

ALERT-C	Advice and problem Location for European Road Traffic, Version C
ASCII	American Standard Code for Information Interchange
CCD	Country code
CID	Country Identifier
CLST	Code of Location Subtype
CNAME	Country name
ECC	<b>E</b> xtended <b>C</b> ountry <b>C</b> ode (an RDS feature)
EDIFACT	<b>E</b> lectronic <b>D</b> ata <b>I</b> nterchange <b>F</b> or <b>A</b> dministration <b>C</b> ommerce and <b>T</b> ransport
GDF	<b>G</b> eographic <b>D</b> ata <b>F</b> iles (ISO 14825 for modelling and exchange of geographic data for transport telematics applications)
LC	Location Code
LTCC	Location Table Country Code
LTN	Location Table Number
NIMA	National Imagery and Mapping Agency (US)
POI	Point of Interest
RDS	<b>R</b> adio <b>D</b> ata <b>S</b> ystem (digital information channel on FM sub carrier)
TIC	<b>T</b> raffic <b>I</b> nformation <b>C</b> entre
TISA	Traveller Information Services Association
TMC	<b>T</b> raffic <b>M</b> essage <b>C</b> hannel
TTI	<b>T</b> raffic and <b>T</b> ravel <b>I</b> nformation

WGS 84	World Geodetic System 1984
--------	----------------------------

## 4 Location coding

### 4.1 General

Location references used by RDS-TMC are covered by the location referencing rules defined in this section. The ALERT-C coding protocol for RDS-TMC is defined in ISO 14819-1.

ALERT-C supports a digital, silent data broadcast service for motorists, providing information about many kinds of traffic situations. This includes roadwork, weather and traffic incident information relating to major national and international roads, regional roads and local or urban roads.

### 4.2 Location tables

#### 4.2.1 General

Within RDS-TMC, locations are identified and referenced by their location code. A given RDS-TMC service uses a pre-defined location table, containing the pre-stored details of the locations that can be referenced in messages from that service.

A location code in such a message refers and serves as a tabular 'address' of the pre-stored location details in the location table used by the service. A real world location may have more than one location code within the same location table. However, within a given location table, each location code refers to one and only one location. A location code has a number in the range 1 to 63,487.

NOTE In ALERT-C, a further 2048 numbers are reserved for INTER-ROAD (see ISO 14819-1) and other forms of referencing.

SIST EN ISO 14819-3:2021

<https://standards.iteh.ai/catalog/standards/sist/c83a2ceb-96e9-4508-ae9e-512f17e22ebd/sist-en-iso-14819-3-2021>

A table may contain a maximum number of 65,536 codes allocated in the following way:

Location code	Use
0	reserved
1 - 63,487	free for normal location coding
63,488 - 64,511	for special purposes
64,512 - 65,532	for INTER-ROAD
64,533 - 65,535	special functions

NOTE INTER-ROAD is a coding mechanism within ALERT-C to reference in a specific type of ALERT-C message (the INTER-ROAD message) a location belonging to a different location table. This can be a table in the same country as well as a table in another country.

#### 4.2.2 Versions and versioning of location tables

Once a location has been allocated, it cannot easily be re-allocated (in an RDS-TMC/ALERT-C environment). Therefore, all existing locations and their associated location codes in a given location table should be regarded as fixed. However, other attributes of a location may, within certain constraints, sometimes change (e.g. name, positive offset, negative offset).

Within each location table, space (unallocated location codes) shall be left to accommodate future requirements for additional locations (to deal with new construction, and location referencing requirements not originally foreseen).

## ISO/DIS 14819-3:2019(E)

Whenever new locations are added to, or removed from, a location table (for example to extend coverage or to reflect changes to the road network), the resulting table shall be treated as a new version. The creation and tracking of versions of a location table allows the evolution of a location table to be understood and supports the successful use of the table and associated TMC service. A new version of an existing location table shall remain compatible with the previous versions of the same location table – the changes shall not be such that the location of a TMC message could be wrongly interpreted by a receiver. For example, location codes which are deleted should not be re-used for a long period. Also changing the attributes class and type of a location might cause an incompatible version of the table. It is part of TISA's location certification process to judge if a table is backwards compatible.

The method for identifying and labelling different versions of a location table is shown in Annex C.3.1

TISA has established an allocation of location tables to show which are in use or available for use in each country. The responsible agency in a country can apply for additional location table numbers in future, to support further applications or more detailed, regional location tables. New tables can also be issued occasionally to allow for complete updates to existing tables. Such major changes will however be very disruptive for users, as existing receivers will not recognise TMC messages relating to the new location table unless the same location table is also installed in the receiver. Switches from one location table to a different one (rather than a new version of the same table) should therefore be avoided as far as possible, especially in established markets.

#### 4.2.3 Exchanging location tables

For TMC services to work well, the different organisations involved need to be able to understand the location table number, version and contents. To achieve this, a Location Table Exchange Format has been defined.

This format will be used for the exchange of TMC Location Tables between the various functional areas, e.g. receiver manufactures, map providers, certification of TMC location tables, Traffic Information Centres and service providers.


The Location Table Exchange Format specifies the information that shall be provided as part of a location table, and the way in which it is to be presented. The Location Table Exchange Format aims to provide a complete and precise description of a TMC location table, that is readable from software programs without any changes or adaptations.

A location table defined using the Location Table Exchange Format consists of a series of text files, each containing a set of records made up of pre-defined fields. The method for using the Location Table Exchange Format is defined in Annex C.3.2.

#### 4.2.4 Hierarchical structure

RDS-TMC location tables use a hierarchical structure of pre-defined locations. A system of pointers provides *upward references* to higher-level locations of which the specified location forms a part.

Example Kent would have an upward **area reference** to South-East England. South-East England may be referenced up to the UK, then the British Isles, then Europe, etc. (Figure 1).

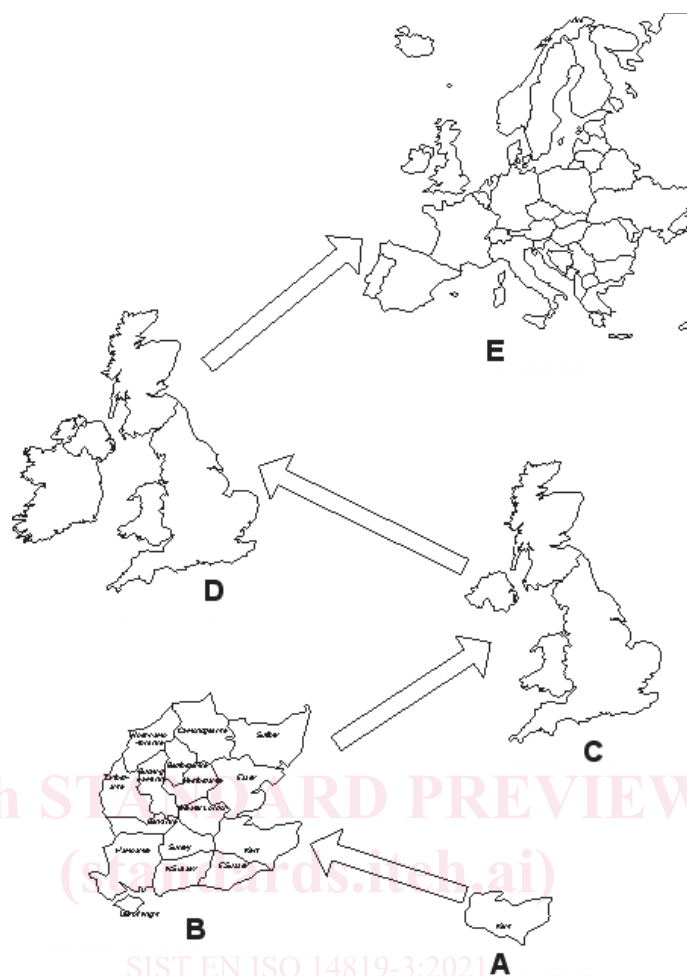**Key**

- A County of Kent
- B South East England
- C United Kingdom
- D British Isles
- E Europe

**Figure 1 — Upward Area Referencing**

Junction 25 on the M1 motorway in UK would have a **linear reference** to a motorway segment, e.g. Leicester - Sheffield. This segment could then be referenced up to the whole road (the M1 Motorway).

Hierarchical tables help to make location referencing simple and unambiguous. A major benefit of hierarchical tables is that they facilitate automated sorting and selection of information for users. However, both hierarchical and unstructured tables are currently used in various applications.

**4.2.5 Location types**

Location types and subtypes are required for language independence of the information given, and to tell the receiving system what data fields to expect.

At the highest level, locations fall into three categories:

- a) area locations
- b) linear locations

## ISO/DIS 14819-3:2019(E)

## c) point locations

Within each category, location types are distinguished (in principle) whenever a location is functionally distinct in the way it shall be handled by the message recipient. Therefore a set of predefined location types and subtypes is set out in Annex A.


Subtypes can be used to give further details of (for example) facilities available at a particular location, such as a service area. The current list, in Annex A, will be added to as further needs are agreed.

Official translations of the language-independent terms that describe location types and subtypes should be agreed on a national level.

#### 4.2.6 Offsets

Most point locations and certain linear locations point to previous and next locations of the same type. This is indicated by negative and positive offsets.

Example Junction 25 on a motorway may be **offset** to Junction 26 in the positive direction, and to Junction 24 in the negative direction. A sign convention adopted at the time of coding locations specifies the **positive direction** of travel along each road (Figure 2).

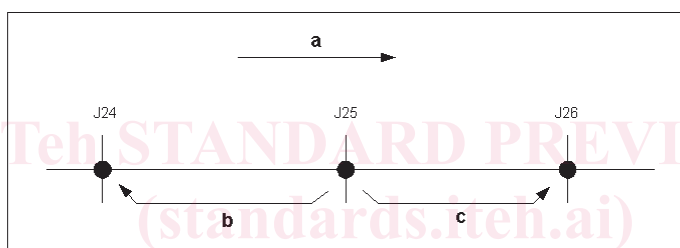

#### Key

- a positive direction
- b negative offset
- c positive offset

SIST EN ISO 14819-3:2021

<https://standards.iteh.ai/catalog/standards/sist/c83a2ceb-96e9-4508-ae9e-512f17e22ebd/sist-en-iso-14819-3-2021>

Figure 2 — Offsets

#### 4.2.7 Direction of the road

The pre-defined direction of the road (see 4.2.6) is reflected in the positive and negative offsets in the location table and in the order of the names of the end points of a road or road segment (see Table 1).

When newly specifying positive directions along roads within pre-defined tables, it is recommended to use geographic positive directions relative to the co-ordinate system, i.e. on the Northern Hemisphere from south to north and from west to east.

For ring roads the clockwise travel direction is recommended positive.

In any case it is not allowed to reverse the direction along continuous and / or connecting segments of a road, e.g. at administrative borders.

#### 4.2.8 Country codes and location table numbers

With ALERT-C, it is assumed that the RDS-TMC service and location tables are organised and defined on a country-by-country basis.

Each service will by default use a location table uniquely identified by a combination of a Location Table Number (LTN), a Location Table Country Code (LTCC) and a Location Table Extended Country Code (LTECC).

LTN is a decimal value in the range 1...63. LTCC is in the range 1...15 (hexadecimal 1...F) and the LTECC comprises two hexadecimal characters. The combination of LTCC, LTECC, LTN and the Location code within the table defines an extended location code, which is unique worldwide.

A country may use several location tables, and a transmission, although having a 'default' location table, may include messages from adjacent areas with different location tables, using the 'Inter-Road' feature, described in ISO14819-1.

TISA has established an allocation of LTNs for each country, given in Annex B. As far as possible, the allocated combinations of LTCC and LTN define a Location Table uniquely, regardless of the LTECC. This ensures support for countries where, for historical reasons, the LECC has not been transmitted.

#### 4.2.9 Constraints

Constraints on location coding may in future be agreed, modelled and documented. At present, however, national authorities and/or service providers are free to allocate location codes within a location table as they wish, to locations specified in accordance with these rules.

### 4.3 TMC Location categories, types and subtypes

Location categories, types and location subtypes are standardised, and specified in Annex A. . Exceptionally, new subtypes may be proposed to ISO TC204 and CEN TC278 for approval, registration and publication. Each location is described by a code, which is composed of:

- a character (A, L or P), indicating the location category (area, linear or point),
- a number indicating the type, [SIST EN ISO 14819-3:2021](https://standards.iteh.ai/catalog/standards/sist/c83a2ceb-96e9-4508-ae9e-512f17e22ebd/sist-en-iso-14819-3-2021)
- a dot,
- a number indicating a subtype.

EXAMPLE 1 *P1.8 - roundabout* (P = point, P1 = junction)

For types for which a subtype is not defined, the subtype code 0 (zero) has to be used to define the type as a subtype.

EXAMPLE 2 *A3.0 – country*

### 4.4 Location table content

#### 4.4.1 General

The location table content is fixed only for the purposes of definition and exchange. The information used within specific applications or by individual manufacturers is not fixed, and is not within the scope of these specifications.

For international consistency, one single location table content shall be adhered to for definition and exchange purposes. In this structure, some items are mandatory; some items are mandatory where they exist; and some items are optional.

#### 4.4.2 Nominal record content

The nominal content of each record in the location table is as follows: