
**Intelligent transport systems —
Information for emergency service
support via personal ITS station —**

**Part 1:
General requirements and technical
definition**

iTeh STANDARD PREVIEW

(standards.iteh.ai)
*Systèmes de transport intelligents — Informations pour le support
des services d'urgence par l'intermédiaire d'une station ITS
personnelle —*

ISO 20530-1:2020

<https://standards.iteh.ai/catalog/standards/sist/20530-1/2020-12-15/iso-20530-1-2020>
Partie 1: Exigences générales et définition technique

fb506258463f/iso-20530-1-2020



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 20530-1:2020

<https://standards.iteh.ai/catalog/standards/sist/2ded619c-47eb-4d08-a640-fb506258463f/iso-20530-1-2020>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Abbreviated terms	3
5 General information	3
6 Use case implementation	3
6.1 Use case clusters and associated use cases.....	3
6.2 Use case implementation.....	4
6.2.1 UC cluster 1 — Impact detection.....	4
6.2.2 UC cluster 2 — Accident determination.....	5
7 Data eXchange messages definitions	7
7.1 General.....	7
7.2 impact-detection.....	8
7.3 vehicle-speed.....	9
7.4 airbag-deployment-check.....	10
7.5 roll-over-check.....	11
7.6 send-accident-data.....	12
Annex A (normative) Data Type (standards.iteh.ai)	13
Annex B (normative) Code list	16
Bibliography	17

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 204, *Intelligent transport*.

A list of all parts in the ISO 20530 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The existing standard on emergency call services (EN 16072) excludes the accident detecting process and focuses on the automotive manufacturer's perspective. In order for emergency call services to be widespread in the automotive industry, a unified system requirement and methodology for accident data gathering and data processing are necessary.

In terms of an accident detection system, the existing emergency call services assess an accident by checking solely impact data. However, impact occurrence from a non-accident incident, such as crossing a speed hump and/or pothole, can be determined as an accident, which can generate a false report. This false report can cause waste of labour, time and expense for eCall service centres (e.g. PSAP [Public Safety Answering Point]). Therefore, it is necessary to define an accident detection process to identify an accident while filtering a false report.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 20530-1:2020](https://standards.iteh.ai/catalog/standards/sist/2ded619c-47eb-4d08-a640-fb506258463f/iso-20530-1-2020)

<https://standards.iteh.ai/catalog/standards/sist/2ded619c-47eb-4d08-a640-fb506258463f/iso-20530-1-2020>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 20530-1:2020

<https://standards.iteh.ai/catalog/standards/sist/2ded619c-47eb-4d08-a640-fb506258463f/iso-20530-1-2020>

Intelligent transport systems — Information for emergency service support via personal ITS station —

Part 1: General requirements and technical definition

1 Scope

This document defines the use cases and general requirements for supporting emergency services via P-ITS-S. Any automotive-related service providers can refer to this document for developing eCall service systems into eCall non-supportive vehicles.

The P-ITS-S acts as a monitoring and data transmitting device which gathers a vehicle's speed, impact and airbag deployment signal to assess the accident occurrence and type of accident. Once gathered data has been determined as an accident, accident related information is sent to an emergency service centre.

Only notable events, such as an airbag-deployed event, rollover and stationary accident, are concerned by this document. In addition, the vehicle data gathering device requirement and implementation methodology for the emergency service are not applicable to this document.

2 Normative references (standards.iteh.ai)

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 13185-2, *Intelligent transport systems — Vehicle interface for provisioning and support of ITS services — Part 2: Unified gateway protocol (UGP) requirements and specification for vehicle ITS station gateway (V-ITS-SG) interface*

ISO 13185-3, *Intelligent transport systems — Vehicle interface for provisioning and support of ITS Services — Part 3: Unified vehicle interface protocol (UVIP) server and client API specification*

ISO 21217, *Intelligent transport systems — Communications access for land mobiles (CALM) — Architecture*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 13185-2, ISO 13185-3, ISO 21217 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

accident determination

judgement of whether an event is a real accident or not, following an analysis based on gathered data

3.2

G-sensor

<accelerometer> sensor module that detects impact by measuring acceleration change

3.3

gyro sensor

<yaw-rate sensor> angular rate sensor in roll and pitch axis

3.4

ITS station

ITS-S

entity in a communication network, comprised of application, facilities, networking and access layer components specified in ISO 21217 that operate within a bounded secure management domain

[SOURCE: ISO 13184-2:2016, 3.5]

3.5

personal/vehicle ITS station

P/V-ITS-S

ITS station implemented in a vehicle or mobile device

[SOURCE: ISO 17438-4:2019, 3.1.4]

3.6

stationary vehicle accident

accident where a stopped vehicle is struck by a moving vehicle

3.7

accident detection system

system which runs a process for determining accident occurrence based on the data gathered from a P-ITS-S

ITEH STANDARD PREVIEW
(standards.iteh.ai)

3.8

accident data

data relevant to an accident

[ISO 20530-1:2020](https://standards.iteh.ai/catalog/standards/sist/2ded619c-47eb-4d08-a640-10415846740-1930-1920)

<https://standards.iteh.ai/catalog/standards/sist/2ded619c-47eb-4d08-a640-10415846740-1930-1920>

Note 1 to entry: An example is impact and rollover magnitude gathered during an accident (i.e. vehicle speed, impact magnitude, *airbag deployment signal* [3.9], angular rate). These data are evaluated for an *accident determination* (3.1) process.

3.9

airbag deployment signal

ECU signal for airbag deployment during an accident which is gathered from the *UVIP server* (3.10)

3.10

UVIP server

server implementing the UVIP services

3.11

preset threshold

specified maximum value of impact magnitude which triggers the further *accident determination* (3.1) process

Note 1 to entry: Determining impact threshold value is out of scope of this document.

3.12

emergency service centre

response centre to which accident information is sent

4 Abbreviated terms

ECU	electronic control unit
UVIP	unified vehicle interface protocol
ITS	intelligent transport system

5 General information

This document specifies the general requirements for the accident detection system via P-ITS-S. It contains information on the following:

- accident detection system structure;
- requirements for impact detection;
- accident determination process by accident case (airbag deployed/rollover/stationary).

The accident detection system consists of the UVIP server, which is a part of an in-vehicle system and a P-ITS-S. The role of a P-ITS-S is to gather accident data from the UVIP server, to analyse this data, and send the location of the accident detected to the emergency service centre.

The accident detection system implementation method differs according to G-sensor availability within a vehicle. Whether there is an in-vehicle or P-ITS-S G-sensor, impact data is gathered and sent to the P-ITS-S for the further accident determination process.

The accident determination process differs according to the accident case (e.g. airbag-deployed, rollover and stationary) as well as the required data. Required data is covered in use case cluster 2. [Figure 1](#) shows the accident detection reference system.

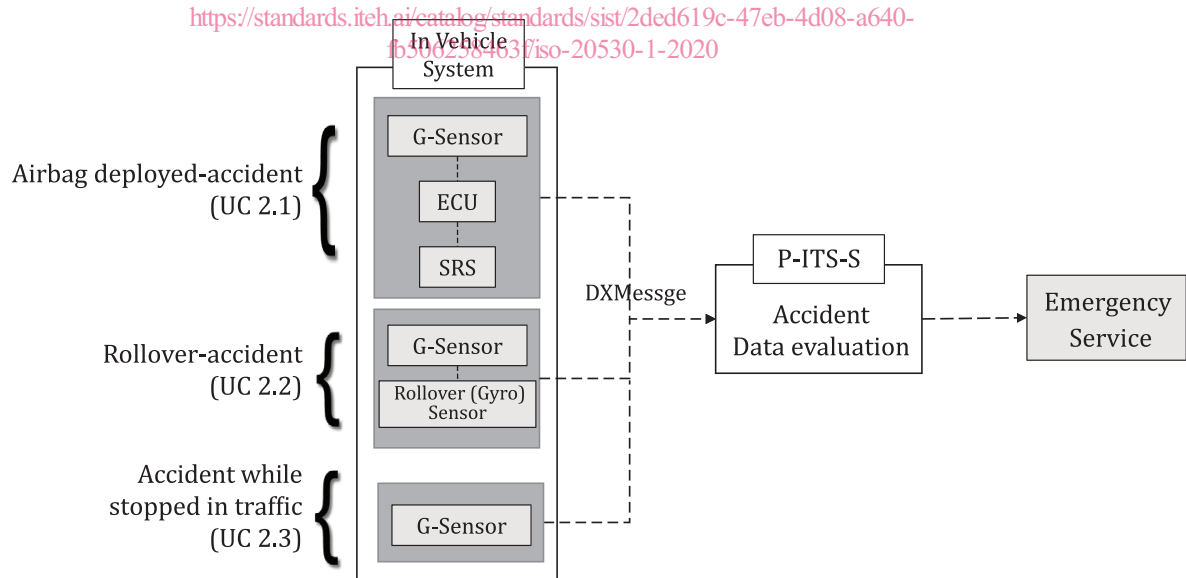


Figure 1 — Accident detection reference system

6 Use case implementation

6.1 Use case clusters and associated use cases

In general, a vehicle accident generates considerable impact along with sudden deceleration, rapid RPM drop, and airbag deployment. This series of data provides a reasonable source of information for

identifying accidents and filtering out false detections. In order for the P-ITS-S to detect an accident properly, the following functionalities are required:

- Exchange of data between the P-ITS-S and the vehicle’s UVIP server and ability to monitor vehicle status, such as impact and speed in real time.

If an impact is detected which exceeds a preset threshold, then the P-ITS-S shall make a request for airbag deployment signal check through the UVIP server.

Once impact data has been determined as an accident, the P-ITS-S sends accident related information, such as time and accident detected location, to the emergency service centre.

[Table 1](#) provides an overview of the different use cases. The use cases are grouped into use case clusters.

Table 1 — Overview of use case clusters and associated use cases

Title of use case cluster	Brief description
1 - Impact detection	<p>This cluster describes an impact data gathering system which is classified according to G-sensor availability within a vehicle. If a vehicle doesn’t support G-sensor, then P-ITS-S shall act as an impact gathering system.</p> <p>UC 1.1 - Impact detection using in-vehicle G-sensor UC 1.2 - Impact detection using P-ITS-S G-sensor</p>
2 - Accident determination	<p>Although there are various accident types, this cluster covers three particular use cases: airbag-deployed accident (UC 2.1), rollover accident (UC 2.2) and stationary accident (UC 2.3). After the P-ITS-S gathers impact data and checks with a preset threshold, each accident case shall follow the corresponding accident detection process.</p> <p>UC 2.1 - Airbag-deployed accident UC 2.2 - Rollover accident UC 2.3 - Accident while stopped in traffic</p>

6.2 Use case implementation

6.2.1 UC cluster 1 — Impact detection

The P-ITS-S monitors impact data through G-sensor in real-time and checks whether the impact has exceeded a preset threshold. Determining a preset impact threshold is not covered in this document.

This use case cluster involves the case where impact is gathered and sent to the P-ITS-S. The role of the P-ITS-S is differed by G-sensor availability within a vehicle.

6.2.1.1 UC 1.1 Impact detection through in-vehicle G-sensor

[Table 2](#) defines the use case where impact data from G-sensor within a vehicle is gathered. In this use case, the P-ITS-S which communicates with a UVIP server gathers impact data directly from an in-vehicle G-sensor in DXMessage format. The UVIP client within the P-ITS-S shall receive impact data along with an airbag deployment signal and move on to the further process.

Table 2 — UC 1.1 Impact detection through in-vehicle G-sensor

Use case	Cluster	1 - Impact detection		
	Name	UC 1.1 - Impact detection through in-vehicle G-sensor		Detect an impact from in-vehicle G-sensor (UVIP Server)
	Occurrence area	Vehicle involved in an accident		
	Provisioning phase	Check impact data which is gathered from UVIP server		
	P-ITS-S control	Gather impact data		
	Hindrance factor	False impact		
	Requirements	Receive impact data through UVIP server		
Messages	Subclause	Name	Exe	Description
	Not applicable			

6.2.1.2 UC 1.2 Impact detection through P-ITS-S G-sensor

Table 3 defines the use case of using the P-ITS-S acting as an impact gathering entity for an older and low-end vehicle model which does not have an in-vehicle G-sensor.

In this use case, if there is a case where impact data exceeds a preset threshold, the P-ITS-S makes a speed and airbag deployment signal data request to the UVIP server and moves on to the accident detection process.

iTech STANDARD PREVIEW
(standards.itech.ai)
Table 3 — UC 1.2 Impact detection through P-ITS-S G-sensor

Use case	Cluster	1 - Impact detection		
	Name	UC 1.2 - Impact detection through P-ITS-S G-sensor		Detect impact from a G-sensor of P-ITS-S.
	Occurrence area	Vehicle involved in an accident		
	Provisioning phase	Check impact data which is gathered from P-ITS-S		
	P-ITS-S control	Gather impact data		
	Hindrance factor	False impact		
	Requirements	Receive impact data using a G-sensor of P-ITS-S		
Messages	Subclause	Name	Exe	Description
	Not applicable			

6.2.2 UC cluster 2 — Accident determination

Although there are various types of vehicle accident, the accident determination process covers particularly airbag-deployed accidents (UC 2.1), rollover accidents (UC 2.2) and stationary accidents (UC 2.3). After the P-ITS-S collects impact data and checks with a preset threshold, each accident case shall follow a different detection process.

6.2.2.1 UC 2.1 Airbag-deployed accident

Table 4 defines the use case where a vehicle is involved in an airbag-deployed accident.