

First edition
2017-09

Corrected version
2019-01

**Gas welding equipment — Safety
devices —**

**Part 2:
Devices not incorporating a flame
(flashback) arrestor**

iTeh STANDARD PREVIEW
*Matériel de soudage au gaz — Dispositifs de sécurité —
Partie 2: Dispositifs sans arrêt de flamme*
(standards.iteh.ai)

ISO 5175-2:2017

<https://standards.iteh.ai/catalog/standards/sist/6e456fff-a406-4c75-a2a6-ded6d079ec33/iso-5175-2-2017>



Reference number
ISO 5175-2:2017(E)

© ISO 2017

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 5175-2:2017](https://standards.iteh.ai/catalog/standards/sist/6e456fff-a406-4c75-a2a6-ded6d079ec33/iso-5175-2-2017)

<https://standards.iteh.ai/catalog/standards/sist/6e456fff-a406-4c75-a2a6-ded6d079ec33/iso-5175-2-2017>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Design and materials	3
4.1 Connections	3
4.2 Materials	3
5 Requirements	4
5.1 General	4
5.2 Gas tightness	4
5.3 Pressure resistance	4
5.4 Non-return valve	4
5.5 Pressure relief valves	5
5.6 Excess flow cut-off valves	5
5.7 Flashback resistance	5
6 Methods for type testing	5
6.1 General	5
6.2 Accuracy of pressure and flow measurements	5
6.3 Test gases	5
6.4 Gas tightness test	6
6.5 Pressure resistance test	6
6.6 Non-return valve test	6
6.7 Pressure relief valves	6
6.8 Excess flow cut-off valve	6
6.9 Internal leakage test for cut-off valves	7
7 Manufacturer's instructions	7
8 Marking	7
Annex A (informative) Gas flow measurement	9
Annex B (informative) Third party testing information	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html. (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 44, *Welding and allied processes*, Subcommittee SC 8, *Equipment for gas welding, cutting and allied processes*.

This first edition of ISO 5175-2, together with ISO 5175-1, cancels and replaces ISO 5175:1987, which has been technically revised. It also incorporates the Amendment ISO 5175:1987/Amd 1:2015.

A list of all parts in the ISO 5175 series can be found on the ISO website.

Requests for official interpretations of any aspect of this document should be directed to the Secretariat of ISO/TC 44/SC 8 via your national standards body. A complete listing of these bodies can be found at www.iso.org.

This corrected version of ISO 5175-2:2017 incorporates list item h) in [Clause 8](#).

Gas welding equipment — Safety devices —

Part 2:

Devices not incorporating a flame (flashback) arrestor

1 Scope

This document specifies the general requirements and tests for safety devices for fuel gases and oxygen or compressed air which do not incorporate a flame (flashback) arrestor used downstream of manifold, cylinder and/or pipeline outlet regulators, and upstream of blowpipes for welding, cutting and allied processes.

This document does not specify the location of these devices in the gas system.

This document is not applicable to safety devices which incorporate a flame arrestor, covered by ISO 5175-1.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 554, *Standard atmospheres for conditioning and/or testing — Specifications*

ISO 2503, *Gas welding equipment — Pressure regulators and pressure regulators with flow-metering devices for gas cylinders used in welding, cutting and allied processes up to 300 bar (30 MPa)*

ISO 5175-1:2017, *Gas welding equipment — Safety devices — Part 1: Incorporating a flame (flashback) arrestor*

ISO 7289, *Gas welding equipment — Quick-action couplings with shut-off valves for welding, cutting and allied processes*

ISO 7291, *Gas welding equipment — Pressure regulators for manifold systems used in welding, cutting and allied processes up to 30 MPa (300 bar)*

ISO 9090, *Gas tightness of equipment for gas welding and allied processes*

ISO 9539, *Gas welding equipment — Materials for equipment used in gas welding, cutting and allied processes*

ISO 10225, *Gas welding equipment — Marking for equipment used for gas welding, cutting and allied processes*

ISO 15296, *Gas welding equipment — Vocabulary*

EN 560, *Gas welding equipment — Hose connections for equipment for welding, cutting and allied processes*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 15296 and the following apply.


ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <http://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

**3.1
excess flow cut-off valve**

device which stops the gas flow in the event of flow exceeding a predetermined value

EXAMPLE A valve is held open by a spring; it closes when the force caused by the dynamic pressure becomes greater than the force of the spring. A resetting device is necessary. An example is given in [Figure 1](#).

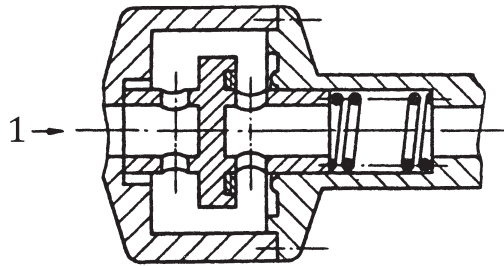

Key

1 normal direction of gas flow

Figure 1 — Excess flow cut-off valve (example)

**3.2
maximum operating pressure**

maximum pressure to which the equipment may be subjected in service

ISO 5175-2:2017
<https://standards.iteh.ai/catalog/standards/sist/6e456fff-a406-4c75-a2a6-ded6d079ec33/iso-5175-2-2017>

**3.3
multifunctional safety device**


device which incorporates two or more of the safety functions

EXAMPLE *Non-return valve* ([3.4](#)) and excess flow cut-off valve.

**3.4
non-return valve**

device which prevents passage of gas in the direction opposite to flow

EXAMPLE A valve is held open by energy in gas stream and closes when downstream pressure is approximately equal to or greater than that in normal direction of flow. An example is given in [Figure 2](#).

**Key**

1 normal direction of gas flow

Figure 2 — Non-return valve (example)

3.5**pressure relief valve**

device which automatically vents gas when the pressure exceeds some predetermined value and seals again when the pressure returns to within specified limits of that value

EXAMPLE A valve is held closed by a spring; it opens when force caused by internal pressure rise exceeds the spring load. An example is given in [Figure 3](#).

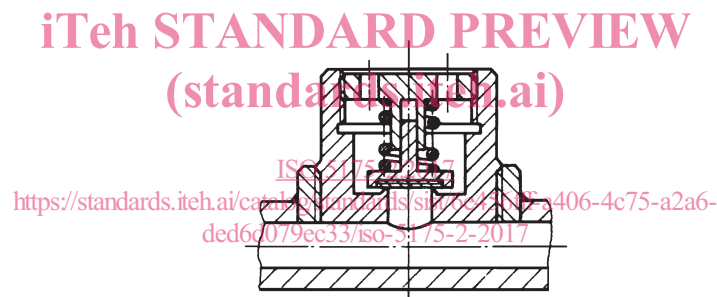


Figure 3 — Pressure relief valve (example)

3.6**safety device**

device for welding equipment which averts risk in case of misuse or malfunction of the downstream gas welding equipment

4 Design and materials**4.1 Connections**

Threaded connections up to G1 shall be in accordance with EN 560. Quick release connections shall be in accordance with ISO 7289.

4.2 Materials

Materials used for safety devices shall conform to the requirements laid down in ISO 9539.

5 Requirements

5.1 General

A summary of the requirements and test sequence for each device is given in [Table 1](#).

Table 1 — Summary of requirements and test sequence for safety devices

Safety device function(s)	Requirements (Subclause no.)	Tests (in test order) (Subclause no.)	Number of devices required for each test	Total number of devices required
Non-return valve	5.2.1	6.4 External gas tightness	5	6
	5.2.2	6.5 Pressure resistance	1 ^a	
	5.3	6.6 Reverse flow	5	
	5.4	6.9 Internal leakage	5	
Pressure relief valve	5.2.1	6.4 External gas tightness	5	6
	5.3	6.5 Pressure resistance	1 ^a	
	5.5	6.7 Relief pressure and flow	5	
Excess flow cut-off valve	5.2.1	6.4 External gas tightness	5	6
	5.2.2	6.5 Pressure resistance	1 ^a	
	5.3	6.8 Excess flow cut-off	5	
	5.6	6.9 Internal leakage	5	

^a Use a new device for this test. Do not use for any other test.

NOTE In the following subclauses the terms “upstream” and “downstream” refer to the normal direction of gas flow in the device.

iTeH STANDARD PREVIEW
(standards.iteh.ai)

5.2 Gas tightness

ISO 5175-2:2017

5.2.1 External gas tightness

<https://standards.iteh.ai/catalog/standards/sist/6e456fff-a406-4c75-a2a6-ded6d079ec33/iso-5175-2-2017>

The general requirements on external gas tightness and the test procedures shall be in accordance with ISO 9090.

5.2.2 Internal gas tightness

Where internal gas tightness is required in this document the leakage rate shall not exceed 50 cm³/h for devices with a connection internal bore (diameter) less than 11 mm or 0,41 d^2 for larger diameters (for tests, see [6.6](#) and/or [6.9](#)).

NOTE The value 0,41 d^2 is the flow in cm³/h where d is the internal bore (diameter) in mm of the largest connection of the device.

5.3 Pressure resistance

The housings of the safety devices shall resist a pressure equal to ten times the maximum operating pressure, with the test pressure in all cases not less than 6 MPa (60 bar).

NOTE 1 bar = 0,1 MPa = 10⁵ Pa. 1 Pa = 1 N/m². All pressures are gauge pressure.

When the device is tested in accordance with [6.5](#), no permanent deformation of the pressure retaining components shall occur after a test duration of at least 5 min.

5.4 Non-return valve

Non-return valve shall not allow the reverse flow of gases when tested in accordance with [6.6](#).

5.5 Pressure relief valves

The opening pressure of the pressure relief valve shall be between 1,3 and 2 times the maximum operating pressure specified by the manufacturer and the valve shall close at a pressure between 1 and 2 times this pressure. They shall be leak-proof to the requirements of [5.2.1](#) at all pressures up to and including the maximum operating pressure. They shall be checked in accordance with [6.7](#).

The manufacturer shall state the flow capacity to atmosphere as measured at twice the operating pressure.

If a pressure relief valve is incorporated in a regulator, it shall be in accordance with ISO 2503 or ISO 7291 as applicable and does not belong anymore to the scope of this document.

5.6 Excess flow cut-off valves

Excess flow cut-off devices shall stop the gas flow when the flow reaches between 1,1 and 2 times the nominal flow rate specified by the manufacture when tested in accordance with [6.8](#).

5.7 Flashback resistance

Safety devices used in applications where flashback may occur shall conform to the requirements of this document after exposure to flame arrestor test performed according to ISO 5175-1:2017, 6.7, where the flame arrestor is replaced by the safety device to be tested.

6 Methods for type testing

iTeh STANDARD PREVIEW
(standards.iteh.ai)

6.1 General

The test methods in this clause are not intended as production inspection tests, but are to be applied to sample devices to be tested for compliance with this document. Tests shall be carried out on new devices with all safety functions operational as designed.

Third party conformity testing is not a requirement of this document. See [Annex B](#) for information relating to third party conformity testing if required.

6.2 Accuracy of pressure and flow measurements

The allowable total error of the measured values are as follows:

- flow: $\pm 10\%$;
- pressure: $\pm 3\%$.

All flows and pressures shall be expressed in standard atmospheric conditions in accordance with ISO 554. All pressure values are given as gauge pressure, expressed in bars.

6.3 Test gases

Unless otherwise stated, tests shall be carried out at ambient pressure conditions and at $(20 \pm 5)^\circ\text{C}$ with air or nitrogen free from oil and grease.

Air is considered as oil-free if it comprises

- a mass fraction of oil vapour of less than 5×10^{-6} , and
- less than 1 mg/m^3 of suspended droplets.

In all cases, tests shall be carried out with dry gas with a maximum moisture content corresponding to a dew point of 0°C .