
**ISO metric trapezoidal screw
threads — Basic and design profiles**

Filetages métriques trapézoïdaux ISO — Profils de base et nominal

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 2901:2016](https://standards.iteh.ai/catalog/standards/sist/4932d8df-add7-4737-adafee4b3c81adeb/iso-2901-2016)

<https://standards.iteh.ai/catalog/standards/sist/4932d8df-add7-4737-adafee4b3c81adeb/iso-2901-2016>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 2901:2016

<https://standards.iteh.ai/catalog/standards/sist/4932d8df-add7-4737-adafee4b3c81adeb/iso-2901-2016>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols	1
5 Basic profile	2
6 Design profile	4
Bibliography	6

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 2901:2016](https://standards.iteh.ai/catalog/standards/sist/4932d8df-add7-4737-adaf-ee4b3c81adeb/iso-2901-2016)

<https://standards.iteh.ai/catalog/standards/sist/4932d8df-add7-4737-adaf-ee4b3c81adeb/iso-2901-2016>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 1, *Screw threads*.

This third edition cancels and replaces the second edition (ISO 2901:1993), which has been technically revised. The following changes have been made:

- the phrase “maximum material profiles” has been replaced by “design profiles”;
- the reference ISO 2903 has been replaced by ISO 5408;
- the symbols have been updated;
- the definition of basic profile has been deleted;
- [Figure 2](#) has been revised and [Figure 3](#) has been deleted.

ISO metric trapezoidal screw threads — Basic and design profiles

1 Scope

This document specifies the basic and design profiles of ISO metric trapezoidal screw threads.

This document is chiefly applicable to traversing threads for traversing motion on machines, tools, etc. It can also be used for fastening threads.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5408 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Symbols

ISO 2901:2016
<https://standards.iteh.ai/catalog/standards/sist/4932d8df-add7-4737-adafee4b3c81adeb/iso-2901-2016>

For the purposes of this document, the following symbols apply.

D	major diameter of internal thread on basic profile
D_4	major diameter of internal thread on design profile
d	major diameter of external thread (nominal diameter)
D_2	pitch diameter of internal thread
d_2	pitch diameter of external thread
D_1	minor diameter of internal thread
d_1	minor diameter of external thread on basic profile
d_3	minor diameter of external thread on design profile
P	pitch
H	fundamental triangle height
H_2	thread height on basic profile
H_0	thread overlap on design profile
H_4	thread height of internal thread on design profile

- h_3 thread height of external thread on design profile
- a_c clearances at major and minor diameters on design profile
- w width of flat crest or root on basic profile
- R_1 radius on crest corners of external thread on design profile
- R_2 radius on root corners of internal and external threads on design profile

5 Basic profile


The basic profile is shown as a thick line in [Figure 1](#). It is common to internal and external threads.

The dimensions of the basic profile are given in [Table 1](#).

$$H = P / (2 \tan 15^\circ) = 1,866\ 025\ 404\ P$$

$$H_2 = 0,5\ P$$

$$w = (H - H_2) P / (2H) = 0,366\ P$$

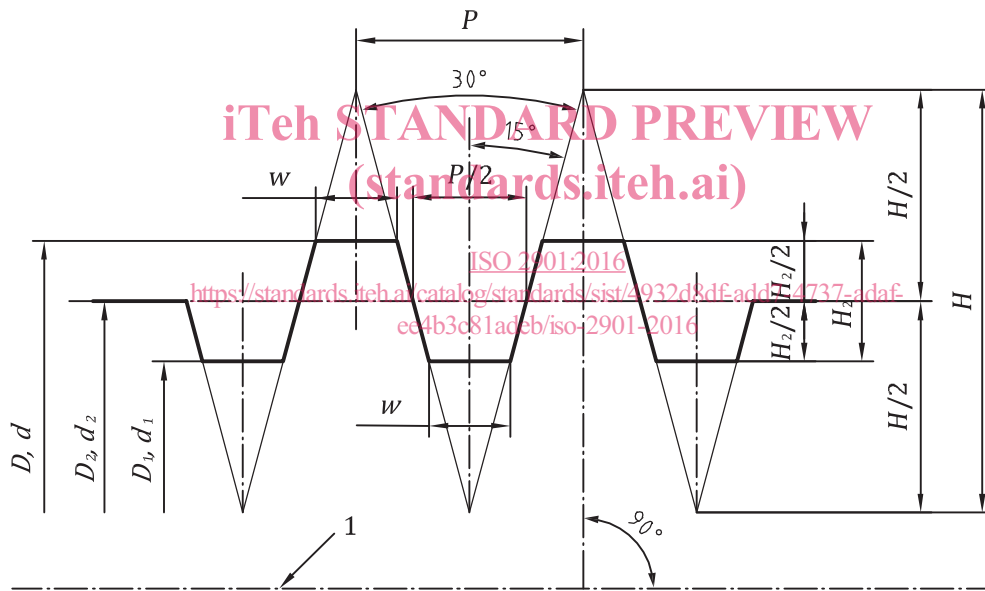

- Key**
- 1 axis of screw thread

Figure 1 — Basic profile

Table 1 — Basic profile dimensions

Dimensions in millimetres

Pitch <i>P</i>	<i>H</i>	<i>H/2</i>	<i>H₂</i>	<i>w</i>
1,5	2,799	1,400	0,75	0,549
2	3,732	1,866	1	0,732
3	5,598	2,799	1,5	1,098
4	7,464	3,732	2	1,464
5	9,330	4,665	2,5	1,830
6	11,196	5,598	3	2,196
7	13,062	6,531	3,5	2,562
8	14,928	7,464	4	2,928
9	16,794	8,397	4,5	3,294
10	18,660	9,330	5	3,660
12	22,392	11,196	6	4,392
14	26,124	13,062	7	5,124
16	29,856	14,928	8	5,856
18	33,588	16,794	9	6,588
20	37,320	18,660	10	7,320
22	41,052	20,526	11	8,052
24	44,784	22,392	12	8,784
28	52,248	26,124	14	10,248
32	59,712	29,856	16	11,712
36	67,176	33,588	18	13,176
40	74,640	37,320	20	14,640
44	82,104	41,052	22	16,104

6 Design profile

The two design profiles are shown as a thick line in [Figure 2](#). They are different between internal and external threads. The limit deviations are applied to the design profiles.

The dimensions of the design profiles are given in [Table 2](#).

$$H_0 = H_2 = 0,5P$$

$$h_3 = H_4 = H_0 + a_c = 0,5P + a_c$$

$$D_1 = d - 2H_0 = d - P$$

$$d_2 = D_2 = d - H_0 = d - 0,5P$$

$$d_3 = d - 2h_3 = d - 2(0,5P + a_c)$$


$$D_4 = d + 2a_c$$

$$R_{1\max} = 0,5a_c$$

$$R_{2\max} = a_c$$

In the case of manufacture by rolling, the profile at the minor diameter can be modified in order to obtain a larger rounding on the root of the external thread. The minor diameter d_3 of the external thread may in this case be reduced by $0,15P$.

If the modification of the profile becomes necessary, due to the particular methods of manufacture, it shall be agreed upon between the customer and the manufacturer.

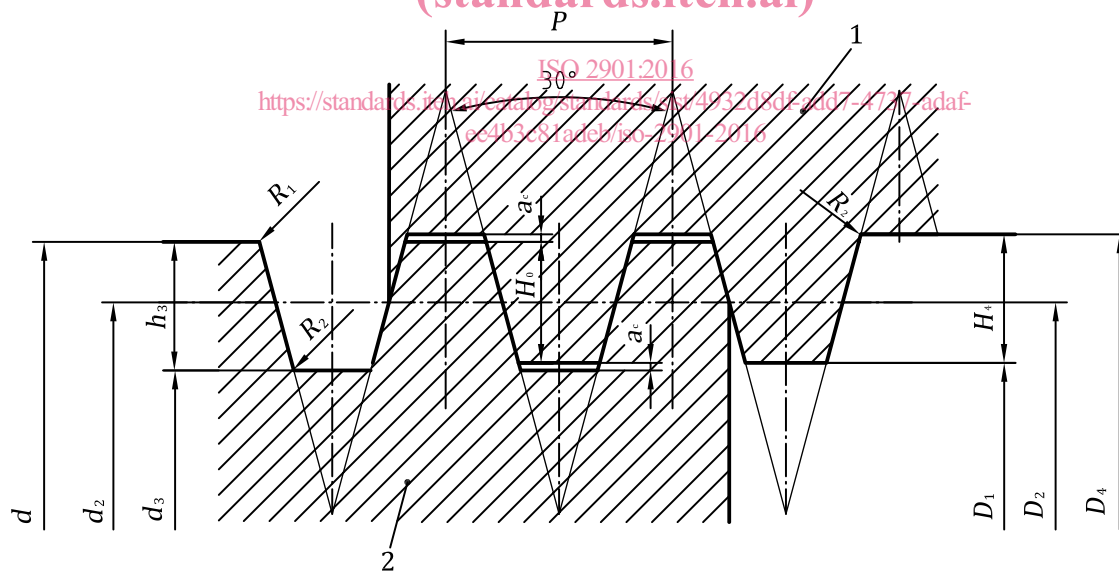

- Key**
- 1 internal thread
 - 2 external thread

Figure 2 — Design profiles

Table 2 — Design profile dimensions

Dimensions in millimetres

Pitch <i>P</i>	<i>a_c</i>	<i>H₄ = h₃</i>	<i>R₁ max</i>	<i>R₂ max</i>
1,5	0,15	0,9	0,075	0,15
2	0,25	1,25	0,125	0,25
3	0,25	1,75	0,125	0,25
4	0,25	2,25	0,125	0,25
5	0,25	2,75	0,125	0,25
6	0,5	3,5	0,25	0,5
7	0,5	4	0,25	0,5
8	0,5	4,5	0,25	0,5
9	0,5	5	0,25	0,5
10	0,5	5,5	0,25	0,5
12	0,5	6,5	0,25	0,5
14	1	8	0,5	1
16	1	9	0,5	1
18	1	10	0,5	1
20	1	11	0,5	1
22	1	12	0,5	1
24	1	13	0,5	1
28	1	15	0,5	1
32	1	17	0,5	1
36	1	19	0,5	1
40	1	21	0,5	1
44	1	23	0,5	1