
**Sensory analysis — General guidance
for the application of sensory analysis
in quality control**

*Analyse sensorielle — Lignes directrices générales pour l'application
de l'analyse sensorielle en contrôle qualité*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 20613:2019](https://standards.iteh.ai/catalog/standards/sist/1d50fa6d-d9e5-4582-b4e0-fbe21af745a2/iso-20613-2019)

[https://standards.iteh.ai/catalog/standards/sist/1d50fa6d-d9e5-4582-b4e0-
fbe21af745a2/iso-20613-2019](https://standards.iteh.ai/catalog/standards/sist/1d50fa6d-d9e5-4582-b4e0-fbe21af745a2/iso-20613-2019)



iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 20613:2019

<https://standards.iteh.ai/catalog/standards/sist/1d50fa6d-d9e5-4582-b4e0-f3e21af745a2/iso-20613-2019>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Elements for implementing and maintaining a sensory quality control programme	3
4.1 Assessment from various perspectives.....	3
4.2 Sensory analysis in all phases of production process.....	3
4.3 Consumer-derived sensory specifications.....	3
4.4 Sensory and instrumental data.....	3
4.5 Detailed quality records.....	3
5 Procedures to implement a sensory quality control programme	4
5.1 General.....	4
5.2 Establishing sensory specifications/standards.....	4
5.2.1 General.....	4
5.2.2 Paper standard.....	5
5.2.3 Physical control standard.....	5
5.2.4 Preservation and renewal of physical control standards.....	5
5.3 Selection, training and qualification of assessors in quality control.....	5
5.3.1 General.....	5
5.3.2 Assessors for finished product evaluation.....	5
5.3.3 Assessors for in-process evaluation.....	6
5.3.4 Assessors for raw materials evaluation.....	6
5.4 Appropriate facilities.....	6
5.5 Sensory method applications.....	6
5.5.1 General.....	6
5.5.2 In-out test.....	7
5.5.3 Difference-from-control test.....	7
5.5.4 Descriptive sensory analysis method.....	8
5.5.5 Difference scoring with key attribute scales test.....	8
5.6 Data presentation and integration of control charts.....	8
5.6.1 General.....	8
5.6.2 \bar{X} chart.....	9
5.6.3 Closeness-to-control standard/conformance to specification chart.....	9
Bibliography	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 34, *Food products*, Subcommittee SC 12, *Sensory analysis*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Sensory analysis — General guidance for the application of sensory analysis in quality control

1 Scope

This document gives guidelines for the implementation of a sensory analysis programme in quality control (QC), including general elements and procedures.

It is applicable to food and non-food industries.

It is limited to in-plant sensory analysis in QC.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5492, *Sensory analysis — Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5492 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <http://www.electropedia.org/>

3.1

quality

degree to which a set of inherent characteristics of an object fulfils requirements

Note 1 to entry: The definition of quality in this context includes consumer input.

Note 2 to entry: Quality has a multidimensional nature. The critical quality dimensions or inherent quality characteristics of the product should be determined.

Note 3 to entry: Satisfaction in this context includes consistent conformance to stated or implied needs. The product's degree of conformance and its reliability should be taken into consideration.

[SOURCE: ISO 9000:2015, 3.6.2, modified — The notes to entry have been replaced.]

3.2

quality control

QC

part of *quality* (3.1) management focused on fulfilling quality requirements

Note 1 to entry: QC is a procedure or set of procedures intended to ensure that a manufactured product adheres to a defined set of quality criteria or meets the requirements of the customer.

[SOURCE: ISO 9000:2015, 3.3.7, modified — Note 1 to entry has been added.]

3.3
quality assurance
QA

part of *quality* (3.1) management focused on providing confidence that quality requirements will be fulfilled

Note 1 to entry: In developing products, QA is any systematic process of checking to see whether a product being developed is meeting specified requirements.

[SOURCE: ISO 9000:2015, 3.3.6, modified — Note 1 to entry has been added.]

3.4
specification

document stating requirements

Note 1 to entry: A specification can be related to activities (e.g. procedure document, process specification and test specification), or products (e.g. product specification, performance specification and drawing).

Note 2 to entry: A specification is an exact statement of the particular needs to be satisfied, or essential characteristics that a customer requires and which a vendor must deliver. Specifications are written usually in a manner that enables both parties (and/or an independent certifier) to measure the degree of conformance.

[SOURCE: ISO 9000:2015, 3.8.7, modified — The example has been deleted and Note 2 to entry has been replaced.]

3.5
sensory specification/standard

document or product that defines the required sensory characteristics of an ingredient (raw material), a packaging material, an in-process or finished product (including its packaging) and their acceptable ranges of variation

Note 1 to entry: It may also be called "control standard".
<https://standards.iteh.ai/catalog/standards/sist/1d50fa6d-d9e5-4582-b4e0-3c31ef745e2/iso-20613-2019>

Note 2 to entry: It may be a paper standard (paper or electronic document with written and/or pictorial descriptions) or reference samples (product standard), which is or are selected to represent the *quality* (3.1) of the product.

3.6
calibration reference

material that represents the possible range of deviations from the *specification* (3.4)

Note 1 to entry: For a finished product, calibration references can be created through formula modification or by aging or abusing the product to demonstrate minor, moderate and major variations from the control.

Note 2 to entry: Reference products with unacceptable deviations can be helpful in demonstrating issues arising from raw materials, processing and packaging.

Note 3 to entry: It is recommended to determine calibration references by experts from the R&D department and/or sensory group, but references should be checked against consumer's opinions.

3.7
in-out test

test to determine whether a test sample is within or outside a relevant sensory *specification* (3.4)

Note 1 to entry: It is also called "pass/fail method" or "accept/reject method".

[SOURCE: ISO 5492:2008/Amd.1:2016, 4.60, modified — Note 1 to entry has been added.]

3.8
difference-from-control test

test to indicate the degree of difference between a test sample and a control standard

Note 1 to entry: It is a comparison test. It is essential to establish and maintain a constant control standard.

Note 2 to entry: The range of difference from control standard and its meaning for disposition in *quality control* (3.2) should be established.

4 Elements for implementing and maintaining a sensory quality control programme

4.1 Assessment from various perspectives

During its set up and implementation, a sensory QC programme should be assessed from various perspectives, such as

- existing quality assurance (QA)/QC practices,
- product quality records and factors influencing the required sensory quality of finished products,
- possible sensory test capability,
- technical level of the production manufacturer,
- cost and economic benefit,
- consumer acceptance, and
- market feedback.

4.2 Sensory analysis in all phases of production process

A sensory QC programme should cover all phases of the production process. Sensory analysis of raw ingredients as well as in-process and finished products should be taken into account. Evaluation procedures should follow the rules of good sensory practices, such as capable assessors and proper sensory methods, when possible with same conditions of preparation and evaluation for each sample, proper environment, controlled procedures and balanced designs.

4.3 Consumer-derived sensory specifications

Input from target consumers should contribute to establishing sensory specifications of products. Key sensory attributes and their acceptable limits should be established on the recognition and acceptance of targeted consumers to ensure that the sensory QC programme can meet the needs of consumers and allow monitoring of the current quality of products (including competitive products in the market). Examples of defective products should be maintained to assist in resolving production problems or consumer complaints.

4.4 Sensory and instrumental data

Sensory analysis and instrumental analysis are both powerful tools that can be used in QC. The relationship between sensory and instrumental data is needed to explore and validate the instrumental techniques to measure or provide information on the key sensory attributes of product. Sensory analysis is the only way to obtain direct measurement of perceived attributes. It assists in better understanding and satisfying the needs of consumers. All instrumental devices or analytical measures used to estimate sensory quality should be tested with the company's products and production variability ranges, and validated with the sensory responses collected by sensory analysis.

4.5 Detailed quality records

The monitoring requirements for sensory QC and their inspection should be fully documented and recorded. Records should be completed and detailed in such a way that they are easy to understand conveniently and effectively. They should clearly explain the state of product quality and give reliable

reasons for the rejection of products that do not meet the specified quality. They can provide guidance on the specific actions to be taken.

5 Procedures to implement a sensory quality control programme

5.1 General

To carry out a sensory QC programme, it is important to

- first, establish the sensory specification in paper and/or physical standards,
- second, to collect quality data, including the establishment of a sensory panel, the facilities with appropriate equipment, the selection of sensory analysis methods, and statistical analysis and interpretation of results, and
- finally, to take decisions through statistical analysis of the data.

Figure 1 shows a design for a complete programme.

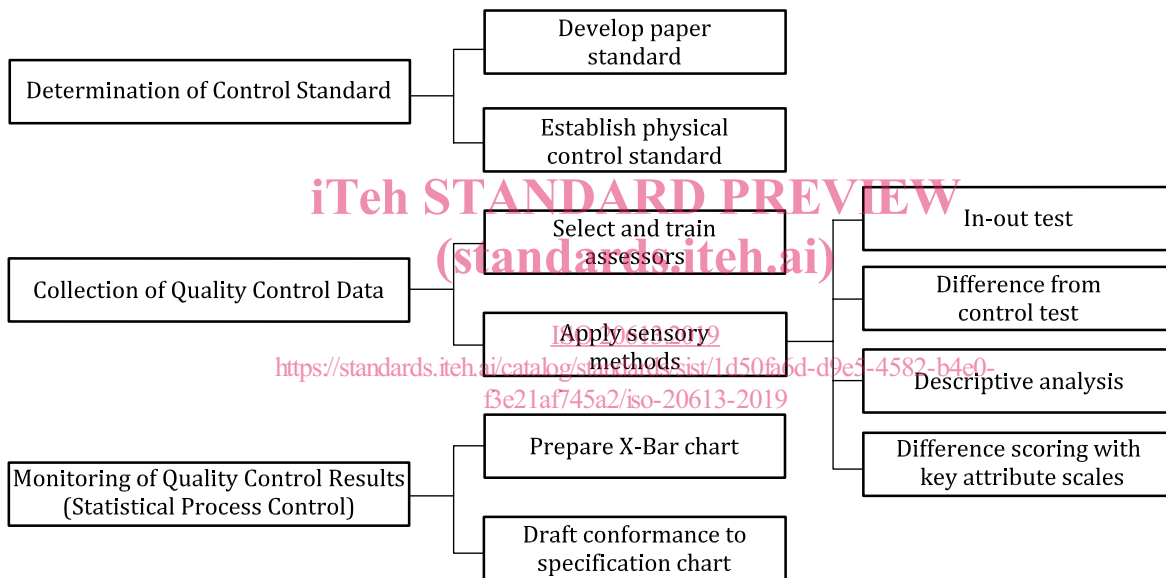


Figure 1 — Design for implementing a sensory QC programme

5.2 Establishing sensory specifications/standards

5.2.1 General

When defining the sensory specifications/standards, several factors should be considered, such as marketing objectives, production variability, attributes that drive consumer acceptance, the nature of the product, manufacturing conditions and available resources. The specific objectives of the QC programme should also be taken into account. When the objective is to design a sensory QC programme to avoid sensory defects, the sensory quality standards will include a description of the most common defects in the product, including those defects resulting from inadequate characteristics of the raw materials used or from process conditions. Defects can also result from incorrect or prolonged storage or from accidental causes. When the objective of the QC programme is to control the featured sensory quality in a specific designation of origin or to compare the quality of an industrial product with competitors in the market, the sensory quality standards should include, not only the attributes defining their sensory profiles, but also those affecting acceptability.

5.2.2 Paper standard

The elaboration of a paper standard should include definitions for all the key attributes, especially those driving consumer acceptance and perceptible variations with acceptable limits depending on the raw materials and/or manufacturing process. Key attributes refer to those attributes that vary in production and that are likely to cause consumer rejection. Sensory professionals and/or management staff should determine them based on descriptive analysis and consumer testing. Photographs can also be used as supplements of paper standards, especially for the appearance requirements of raw materials in process and finished products.

5.2.3 Physical control standard

The physical control standard or target-finished product can be prepared according to the formula and process determined by product development and can be stored in the required conditions. It can also be prepared by selecting products of required quality from practical production under normal conditions. Physical control standards of raw materials should be determined jointly by the manufacturer and supplier and contracted by a preliminary protocol.

The validity of physical control standards can vary with time and should be periodically renewed to be sensorially identical to the previous ones and/or updated and adapted to market variations as per consumer-derived sensory specifications.

5.2.4 Preservation and renewal of physical control standards

Once a physical standard has been identified, optimal storage conditions and an adequate supply of the standard in storage should be determined and documented for future reference. An appropriate quantity of the control standard in suitable packaging and storage conditions should be preserved to guarantee that the change of its sensory quality is minimal. It should be replaced when it is depleted or when the sensory properties have changed. A clear methodology to substitute the standard product when necessary should be established. The new standard product should have identical sensory characteristics to the previous one. This similarity should be ascertained by means of a sensory discrimination test, such as the triangle test defined in ISO 4120.

5.3 Selection, training and qualification of assessors in quality control

5.3.1 General

The assessors involved in sensory QC are selected within the enterprise and/or external experienced panellists. Selection, training and monitoring are carried out in accordance with ISO 8586. Calibration references and sensory specifications of finished products, in-process products and incoming ingredients should be used in training sessions.

Appropriate assessors, either initiated, selected or expert, are recruited following ISO 8586 and ISO 13300 (all parts) according to the assessor's requirements for the sensory analysis methods.

5.3.2 Assessors for finished product evaluation

Assessors for finished product evaluation can be selected from large number of sources (e.g. external panels or company employee panels with selected assessors or expert assessors), depending on the requirements for the method selected. Their main task is to carry out the sensory tests for the QC (except in-process evaluation and consumer testing) of the finished product. In addition, they may provide guidance or assist in adjusting the sensory programme. They should be trained to

- be familiar with sensory relevant standard products and the limits of acceptable variations,
- give diagnostic information on defects, if references are available typifying these problems, and
- provide reproducible, repeatable and valid sensory results.