



SLOVENSKI STANDARD
SIST EN 4881:2024

01-januar-2024

Aeronavtika - Mikroobločna oksidacija aluminija in aluminijevih zlitin

Aerospace series - Micro-arc oxidation of aluminium and aluminium alloys

Luft- und Raumfahrt - Mikrolichtbogenoxidation von Aluminium und Aluminiumlegierungen

Série aérospatiale - Oxydation micro-arc de l'aluminium et des alliages d'aluminium

Ta slovenski standard je istoveten z: EN 4881:2023

ICS:

25.160.10 Varilni postopki in varjenje Welding processes

49.025.20 Aluminij Aluminium

SIST EN 4881:2024

en,fr,de

EUROPEAN STANDARD

EN 4881

NORME EUROPÉENNE

EUROPÄISCHE NORM

November 2023

ICS 25.160.10; 49.025.20

English Version

Aerospace series - Micro-arc oxidation of aluminium and aluminium alloys

Série aérospatiale - Oxydation micro-arc de l'aluminium et des alliages d'aluminium

Luft- und Raumfahrt - Mikro-Lichtbogenoxidation von Aluminium und Aluminiumlegierungen

This European Standard was approved by CEN on 30 July 2023.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.

Document Preview

[SIST EN 4881:2024](https://standards.iteh.ai/catalog/standards/sist/bf4c34b8-e7de-49fd-ad42-4ea7b08a7a00/sist-en-4881-2024)

<https://standards.iteh.ai/catalog/standards/sist/bf4c34b8-e7de-49fd-ad42-4ea7b08a7a00/sist-en-4881-2024>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

| Contents | Page |
|---|-------------|
| European foreword | 4 |
| 1 Scope | 5 |
| 2 Normative references | 5 |
| 3 Terms and definitions | 5 |
| 3.1 General terms | 5 |
| 3.2 Technical terms | 6 |
| 4 General principles of the process | 7 |
| 4.1 Purpose of the process | 7 |
| 4.2 Applicability | 7 |
| 4.2.1 Type A: As processed | 7 |
| 4.2.2 Type B: After blasting operation | 7 |
| 4.2.3 Type C: After machining operation | 8 |
| 4.3 Limitations | 8 |
| 4.4 Classifications | 8 |
| 4.4.1 System Types | 8 |
| 4.4.2 Layer thicknesses | 8 |
| 5 Process requirements | 9 |
| 5.1 Information for the processor | 9 |
| 5.2 Process schedule (information) | 9 |
| 5.3 Process conditions | 10 |
| 5.3.1 Tooling | 10 |
| 5.3.2 Masking | 10 |
| 5.3.3 Surface pre-treatment | 10 |
| 5.3.4 Micro-arc oxidation | 10 |
| 5.3.5 Micro-arc oxidation post-treatments | 12 |
| 5.3.6 Water quality | 12 |
| 5.4 Periodic bath chemical analysis | 12 |
| 5.5 Re-processing | 13 |
| 5.6 Glass bead blasting of the friable/porous layer | 13 |
| 5.7 Machining | 13 |
| 6 Test specimens requirements | 13 |
| 6.1 General | 13 |
| 6.2 Materials | 14 |
| 6.3 Tests for the qualification | 14 |
| 6.4 Periodic tests | 14 |
| 7 Parts requirements | 14 |
| 7.1 Conditions of parts prior to the treatment | 14 |
| 7.2 Inspections before the processing | 14 |
| 7.3 Inspections after micro-arc oxidation | 14 |
| 8 Quality assurance | 15 |
| 8.1 Process approval | 15 |
| 8.2 General | 15 |
| Annex A (normative) Tests on specimens for the qualification | 16 |

| | |
|---|-----------|
| Annex B (normative) Periodic tests on test specimens | 20 |
| Annex C (normative) Tests on parts | 22 |
| Annex D (normative) Wear resistance test | 23 |
| Bibliography | 24 |

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[SIST EN 4881:2024](https://standards.iteh.ai/catalog/standards/sist/bf4c34b8-e7de-49fd-ad42-4ea7b08a7a00/sist-en-4881-2024)

<https://standards.iteh.ai/catalog/standards/sist/bf4c34b8-e7de-49fd-ad42-4ea7b08a7a00/sist-en-4881-2024>

EN 4881:2023 (E)**European foreword**

This document (EN 4881:2023) has been prepared by the Aerospace and Defence Industries Association of Europe — Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this document has received the approval of the National Associations and the Official Services of the member countries of ASD-STAN, prior to its presentation to CEN.

This document shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2024, and conflicting national standards shall be withdrawn at the latest by May 2024.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this document: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[SIST EN 4881:2024](https://standards.iteh.ai/catalog/standards/sist/bf4c34b8-e7de-49fd-ad42-4ea7b08a7a00/sist-en-4881-2024)

<https://standards.iteh.ai/catalog/standards/sist/bf4c34b8-e7de-49fd-ad42-4ea7b08a7a00/sist-en-4881-2024>

1 Scope

This document defines the requirements for micro-arc oxidation of aluminium and aluminium alloys for corrosion protection, wear, erosion, dielectric and thermal properties.

The purpose of this document is to give design, quality and manufacturing requirements. It does not give complete in-house process instructions; these are given in the processors detailed process instructions.

This document relates only to micro-arc oxidation. It does not relate to finishing techniques, such as mechanical post treatment.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 6072, *Aerospace series — Metallic materials — Test methods — Constant amplitude fatigue testing*

EN ISO 2409, *Paints and varnishes — Cross-cut test*

EN ISO 4516, *Metallic and other inorganic coatings — Vickers and Knoop microhardness tests*

EN ISO 9227, *Corrosion tests in artificial atmospheres — Salt spray tests*

ASTM D4060,¹ *Standard Test Method for Abrasion Resistance of Organic Coatings by the Taber Abraser*

3 Terms and definitions

3.1 General terms

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp/>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1.1

OEM

producer who has the design authority and manufactures products or components that are purchased by a company and retailed under that purchasing company's brand name

Note 1 to entry: The manufacturer can also apply the process.

3.1.2

manufacturer

company or person who makes, manufactures, assembles components

¹ Published by: ASTM International (US) <https://www.astm.org/>.

EN 4881:2023 (E)**3.1.3****processor**

company or person who applies the process

3.1.4**process instruction**

document that describes the application scopes, detailed process (key parameters, detailed steps, etc.), quality management, environmental and safety regulations

Note 1 to entry: Other examples of documents can be described as a process instruction.

3.1.5**batch**

parts of the same type (i.e. shape, size, material), processed at the same time in the same bath

Note 1 to entry: Unless otherwise specified.

3.2 Technical terms**3.2.1****mechanically disturbed layer****MDL**

layer that is present at the surface resulting from the heat treatment and rolling process of the material

3.2.2**pit**

surface corrosion defect at which the oxide layer is penetrated and/or perforated

Note 1 to entry: Typical characteristics of corrosion pits are:


- rounded or irregular or elongated geometry;
- comet tail or line or halo that emerges from the cavity;
- some corrosion by-products inside pits (on aluminium, the by-product may be granular, powdery or amorphous and white, grey or black in colour).

Note 2 to entry: To be considered as a corrosion pit, a surface cavity shall exhibit at least two of the above characteristics.

3.2.3**MAO layer**

layer which is constituted of a friable/porous layer and a functional layer

Note 1 to entry: See Figure 1.

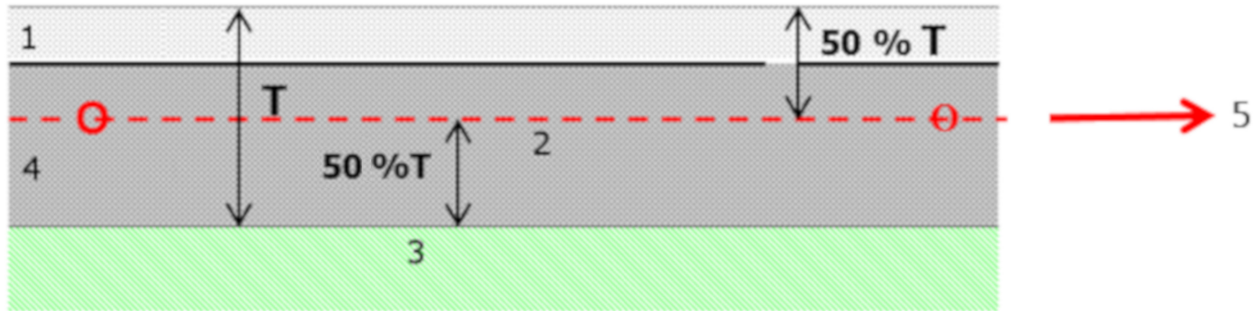

Key

- 1 Friable/porous layer
- 2 Hard ceramic (mainly $\alpha\text{-Al}_2\text{O}_3$)
- 3 Aluminium
- 4 Functional layer
- 5 Initial surface

Figure 1 — MAO layer

3.2.4

functional layer

functional and hard part of the coating useful for wear application and paint adhesion (porous)

4 General principles of the process

4.1 Purpose of the process

Plasma electrolytic oxidation (PEO) or micro-arc oxidation (MAO) is an electrochemical process of anodization that is performed thanks to micro-discharges created on the surface of components immersed in an electrolyte. The process is applied to aluminium, titanium, and magnesium to grow a dense ceramic oxide layer that improves mechanical, wear, thermal, dielectric, and corrosion properties. <https://standards.iteh.ai/catalog/standards/sist/bf4c34b8-e7de-49fd-ad42-4ea7b08a7a00/sist-en-4881-2024>

A controlled high alternating current is applied to a metal part immersed in an electrolytic bath. Due to this current and significant voltage resulting, micro-discharges as well as the development of an intense plasma are created on the surface of the metal. This plasma oxidizes the surface of the part and a ceramic oxide layer grows from the substrate material. The oxide layer is produced by subsurface oxidation. As a result, the process can produce very thick coatings of varying porosity.

This specification applies to aluminium and aluminium alloys.

4.2 Applicability

4.2.1 Type A: As processed

This type of coating can be painted.

4.2.2 Type B: After blasting operation

It is intended for wear applications.

This type of coating can be painted.

EN 4881:2023 (E)**4.2.3 Type C: After machining operation**

It is intended for either wear or erosion applications when tightened geometrical tolerances may be achieved.

4.3 Limitations

All processes that can compromise the oxide layer such as forming, or heat-treatment shall be performed prior to surface preparation of the parts to be oxidized.

Oxidizing should not be applied:

- in zones/areas ensuring electric conductivity;
- for tubes, pipes and open holes with a length to diameter ratio higher than 5:1 (unless using specific cathode);
- for trapped holes with a length to a diameter ratio greater than 5:1;
- for parts or assemblies (e.g. spot-welded and riveted), which can permanently entrap treatment solutions, except components that can be adequately masked.

The formation of oxide layer influences the dimensions of the part and is to be considered for close tolerance parts (growth of 1/3 of thickness).

4.4 Classifications**4.4.1 System Types**

Micro-arc oxidation layer is classified by the three following types:

- type A: as processed;
- type B: after blasting operation;
- type C: after machining operation.

4.4.2 Layer thicknesses

See Table 1.

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[SIST EN 4881:2024](https://standards.itih.ai/catalog/standards/sist/bf4c34b8-e7de-49fd-ad42-4ea7b08a7a00/sist-en-4881-2024)

<https://standards.itih.ai/catalog/standards/sist/bf4c34b8-e7de-49fd-ad42-4ea7b08a7a00/sist-en-4881-2024>