



**SLOVENSKI STANDARD**  
**oSIST prEN ISO 18388:2019**  
**01-maj-2019**

---

**Tehnična dokumentacija izdelkov - Reliefni utori - Vrste in dimenzioniranje (ISO 18388:2016)**

Technical product documentation (TPD) - Relief grooves - Types and dimensioning (ISO 18388:2016)

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

Documentation technique de produits (DPT) - Rainures en relief - Types et dimensionnement (ISO 18388:2016)

<https://standards.iteh.ai/catalog/standards/sist/11fb9647-76a0-4e88-9ab1-e977946bb77a/sist-en-iso-18388-2019>

**Ta slovenski standard je istoveten z: prEN ISO 18388**

---

**ICS:**

01.110	Tehnična dokumentacija za izdelke	Technical product documentation
--------	-----------------------------------	---------------------------------

**oSIST prEN ISO 18388:2019**

**en**



INTERNATIONAL  
STANDARD

ISO  
18388

First edition  
2016-02-15

---

---

**Technical product documentation  
(TPD) — Relief grooves — Types and  
dimensioning**

*Documentation technique de produits (DPT) — Rainures en relief —  
Types et dimensionnement*

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

SIST EN ISO 18388:2019

<https://standards.iteh.ai/catalog/standards/sist/11fb9647-76a0-4e88-9ab1-e977946bb77a/sist-en-iso-18388-2019>



Reference number  
ISO 18388:2016(E)

© ISO 2016

# iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN ISO 18388:2019

<https://standards.iteh.ai/catalog/standards/sist/11fb9647-76a0-4e88-9ab1-e977946bb77a/sist-en-iso-18388-2019>



## **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

	Page
<b>Foreword</b> .....	<b>iv</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Dimensions</b> .....	<b>1</b>
4.1 Relief groove type E.....	1
4.2 Relief groove type F.....	2
4.3 Relief groove type G.....	2
4.4 Relief groove type H.....	3
<b>5 Dimensions of the relief grooves</b> .....	<b>4</b>
5.1 Relief grooves.....	4
5.2 Countersink at the counterpart.....	5
<b>6 Designation</b> .....	<b>5</b>
<b>7 Presentation on the drawing</b> .....	<b>6</b>
7.1 General.....	6
7.2 Conventional representation.....	6
7.3 Simplified representation.....	7
<b>Bibliography</b> .....	<b>8</b>

iTeH STANDARD PREVIEW  
(standards.iteh.ai)

SIST EN ISO 18388:2019

<https://standards.iteh.ai/catalog/standards/sist/11fb9647-76a0-4e88-9ab1-e977946bb77a/sist-en-iso-18388-2019>

## ISO 18388:2016(E)

### Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 10, *Technical product documentation*, Subcommittee SC 6, *Mechanical engineering documentation*.

SIST EN ISO 18388:2019

<https://standards.iteh.ai/catalog/standards/sist/11fb9647-76a0-4e88-9ab1-e977946bb77a/sist-en-iso-18388-2019>

# Technical product documentation (TPD) — Relief grooves — Types and dimensioning

## 1 Scope

This International Standard specifies a series of relief grooves for shafts and holes, intended for general use in mechanical engineering.

It also intends to avoid unnecessary multiplicity of tools by a restricted selection of groove-types and dimensional versions.

NOTE The shape and the dimensions of the relief grooves type G and H correspond with the “Indexable hard material inserts” according to ISO 6987.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 128-22, *Technical drawings — General principles of presentation — Part 22: Basic conventions and applications for leader lines and reference lines*

ISO 128-24, *Technical drawings — General principles of presentation — Part 24: Lines on mechanical engineering drawings*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 3.1

#### relief groove

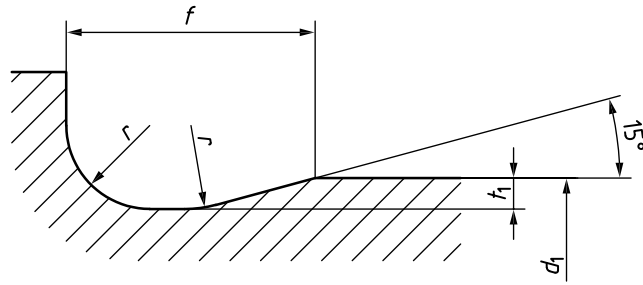
clearance groove of specified form and dimensions created by removing material at an inner corner of a rotationally symmetric workpiece and which is necessary for subsequent machining and assembly with mating parts

## 4 Dimensions

### 4.1 Relief groove type E

The relief groove type E, see [Figure 1](#), shall be applied to workpieces where the planar surface is not subjected to high fatigue loads and where the cylindrical surface will be subsequently machined if necessary. They are also suitable where mating parts have a relatively large counterbore or will not be in contact with the planar surface.

## ISO 18388:2016(E)

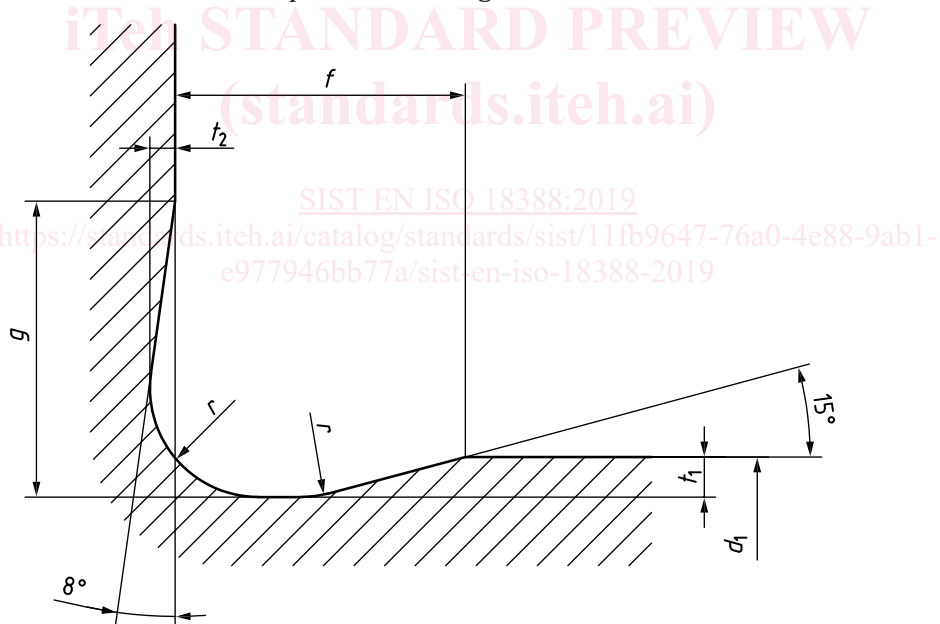
**Key**

- $d_1$  workpiece diameter  
 $f$  width of relief grooves  
 $r$  radius of relief grooves  
 $t_1$  depth of recess

**Figure 1 — Relief groove for cylindrical surfaces intended for subsequent machining**

#### 4.2 Relief groove type F

The relief groove type F, see [Figure 2](#), shall be applied to workpieces with surfaces that are perpendicular to each other and are intended for subsequent machining.

**Key**

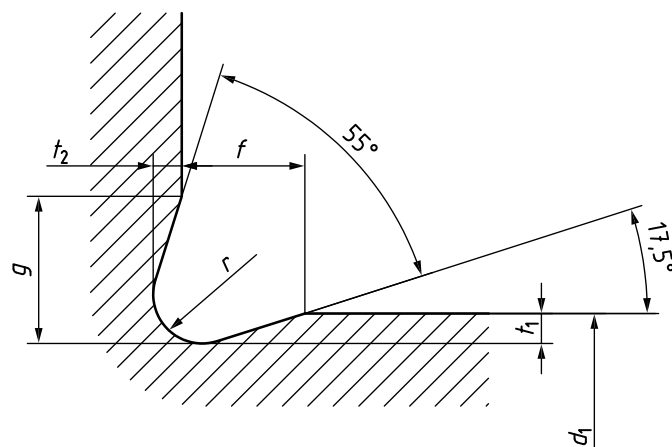
- $d_1$  workpiece diameter  
 $f, g$  width of relief grooves  
 $r$  radius of relief grooves  
 $t_1, t_2$  depth of recess

**Figure 2 — Relief groove for cylindrical and planar surfaces intended for subsequent machining**

#### 4.3 Relief groove type G

The relief groove type G, see [Figure 3](#), shall be applied to workpieces which are not subjected to high fatigue loads and where a small included angle is required.



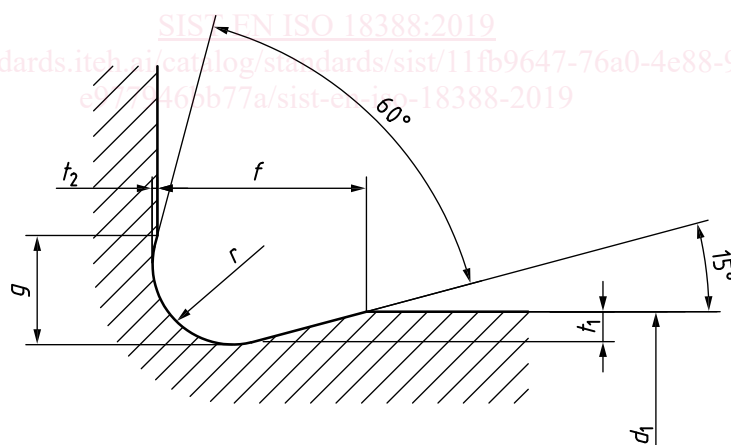
**Key**

- $d_1$  workpiece diameter
- $f, g$  width of relief grooves
- $r$  radius of relief grooves
- $t_1, t_2$  depth of recess

**Figure 3 — Relief groove with smaller included angle**

#### 4.4 Relief groove type H

The relief groove type H, see [Figure 4](#), shall be applied to workpieces with surfaces that are perpendicular to each other and are intended for subsequent machining (but with a greater included angle).

**Key**

- $d_1$  workpiece diameter
- $f, g$  width of relief grooves
- $r$  radius of relief grooves
- $t_1, t_2$  depth of recess

**Figure 4 — Relief groove with greater included angle**

## 5 Dimensions of the relief grooves

### 5.1 Relief grooves

The dimensional values of the relief grooves shall be used for holes and shafts, see [Table 1](#).

**Table 1 — Dimensions of the relief grooves**

Dimensions in millimetres

Type	$r^a$		$t_1$	$t_2$	$f$	$g$	Corresponding diameter $d_1^b$ for workpieces	
	Series 1	Series 2					subjected to normal loads <sup>c</sup>	subjected to higher alternating loads
E		R0,2	0,1	—	1	—	Over $\emptyset$ 1,6 up to $\emptyset$ 3	—
	R0,4		0,2	—	2	—	Over $\emptyset$ 3 up to $\emptyset$ 18	—
		R0,6	0,2	—	2	—	Over $\emptyset$ 10 up to $\emptyset$ 18	—
		R0,6	0,3	—	2,5	—	Over $\emptyset$ 18 up to $\emptyset$ 80	—
	R0,8		0,3	—	2,5	—	Over $\emptyset$ 18 up to $\emptyset$ 80	—
		R1	0,2	—	2,5	—	—	Over $\emptyset$ 18 up to $\emptyset$ 50
		R1	0,4	—	4	—	Over $\emptyset$ 80	—
	R1,2		0,2	—	2,5	—	—	Over $\emptyset$ 18 up to $\emptyset$ 50
	R1,2		0,4	—	4	—	Over $\emptyset$ 80	—
	R1,6		0,3	—	4	—	—	Over $\emptyset$ 50 up to $\emptyset$ 80
	R2,5		0,4	—	5	—	—	Over $\emptyset$ 80 up to $\emptyset$ 125
R4		0,5	—	7	—	—	Over $\emptyset$ 125	
F		R0,2	0,1	0,1	1	(0,9)	Over $\emptyset$ 1,6 up to $\emptyset$ 3	—
	R0,4		0,2	0,1	2	(1,1)	Over $\emptyset$ 3 up to $\emptyset$ 18	—
		R0,6	0,2	0,1	2	(1,4)	Over $\emptyset$ 10 up to $\emptyset$ 18	—
		R0,6	0,3	0,2	2,5	(2,1)	Over $\emptyset$ 18 up to $\emptyset$ 80	—
	R0,8		0,3	0,2	2,5	(2,3)	Over $\emptyset$ 18 up to $\emptyset$ 80	—
		R1	0,2	0,1	2,5	(1,8)	—	Over $\emptyset$ 18 up to $\emptyset$ 50
		R1	0,4	0,3	4	(3,2)	Over $\emptyset$ 80	—
	R1,2		0,2	0,1	2,5	(2)	—	Over $\emptyset$ 18 up to $\emptyset$ 50
	R1,2		0,4	0,3	4	(3,4)	Over $\emptyset$ 80	—
	R1,6		0,3	0,2	4	(3,1)	—	Over $\emptyset$ 50 up to $\emptyset$ 80
	R2,5		0,4	0,3	5	(4,8)	—	Over $\emptyset$ 80 up to $\emptyset$ 125
R4		0,5	0,3	7	(6,4)	—	Over $\emptyset$ 125	
G	R0,4		0,2	0,2	(0,9)	(1,1)	Over $\emptyset$ 3 up to $\emptyset$ 18	—
H	R0,8		0,3	0,05	(2,0)	(1,1)	Over $\emptyset$ 18 up to $\emptyset$ 80	—
	R1,2		0,3	0,05	(2,4)	(1,5)	—	Over $\emptyset$ 18 up to $\emptyset$ 50

<sup>a</sup> Relief grooves radii of the series 1 have to be preferred.

<sup>b</sup> Does not apply to parts with a short shoulder and thin-walled parts. When a workpiece has different diameters, it may be expedient for manufacturing reasons to use several relief grooves having the same form and size.

<sup>c</sup> Type G applies only to workpieces which are not subjected to high fatigue loads.