

---

---

**Cutting tool data representation and  
exchange —**

**Part 80:  
Creation and exchange of 3D models  
— Overview and principles**

**iTeh STANDARD PREVIEW**  
*Représentation et échange des données relatives aux outils  
coupants —*

**(standards.iteh.ai)**

*Partie 80: Création et échange de modèles 3D — Vue d'ensemble et  
principes*

ISO/TS 13399-80:2017

<https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-80e5671a3a05/iso-ts-13399-80-2017>



**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/TS 13399-80:2017](https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-80e5671a3a05/iso-ts-13399-80-2017)

<https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-80e5671a3a05/iso-ts-13399-80-2017>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Abbreviated terms</b> .....	<b>2</b>
<b>5 Designation of design elements</b> .....	<b>3</b>
5.1 General.....	3
5.2 Reference system.....	3
5.2.1 Primary coordinate system “PCS”.....	3
5.2.2 Coordinate system workpiece side “CSW”.....	4
5.3 Planes.....	6
5.3.1 Primary planes.....	6
5.3.2 Planes at workpiece side.....	6
5.4 Axes.....	6
5.4.1 Primary axes.....	6
5.4.2 Axes at workpiece side.....	6
5.5 Solid design elements.....	6
5.6 Level of detail.....	6
5.6.1 General.....	6
5.6.2 Basic model.....	7
5.6.3 Detailed model.....	7
<b>6 Colour setting</b> .....	<b>7</b>
6.1 Colour setting for the model.....	7
6.2 Colour setting for the cutting edge line and the cutting part line.....	7
6.3 Colour setting overview.....	8
<b>7 3D model data exchange</b> .....	<b>8</b>
7.1 General.....	8
7.2 Data exchange model structure.....	8
7.3 Indexable insert tools table.....	9
7.3.1 STP Basic and detail format.....	9
7.3.2 Detail STP structure.....	11
7.3.3 Basic STP structure.....	16
7.4 Non-indexable tools table.....	21
7.4.1 STP basic and detail format.....	21
7.4.2 Detail STP structure.....	22
7.4.3 Basic STP structure.....	24
7.5 Cutting item table.....	25
7.5.1 STP basic and detail format.....	25
7.5.2 Detail STP structure.....	26
7.5.3 Basic STP structure.....	28
7.6 Adaptive item table.....	29
7.6.1 STP basic and detail format.....	29
7.6.2 Detail STP structure.....	30
7.6.3 Basic STP structure.....	32
<b>Bibliography</b> .....	<b>34</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html). (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 29, *Small tools*.

This second edition cancels and replaces the first edition (ISO/TS 13399-80:2014), which has been technically revised.

A list of all parts in the ISO 13399 series can be found on the ISO website.

## Introduction

This document defines the concept, terms, and definitions regarding the creation and exchange of simplified 3D of cutting items, tool items, and adaptive items that can be used for NC-programming, simulation of the manufacturing processes and the determination of collision within machining processes. It is not intended to standardize the design of the items themselves.

Cutting tool data that can be described by the ISO 13399 series include, but are not limited to, everything between the work piece and the machine tool. Information about inserts, solid tools, assembled tools, adaptors, components, and their relationships can be represented by this document. The increasing demand providing the end user with 3D models for the purposes defined above is the basis for the development of this series of International Standards.

The objective of the ISO 13399 series is to provide the means to represent the information that describes cutting tools in a computer sensible form that is independent from any particular computer system. The representation will facilitate the processing and exchange of cutting tool data within and between different software systems and computer platforms and support the application of this data in manufacturing, planning, cutting operations, and the supply of tools. The nature of this description makes it suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases and for archiving. The methods that are used for these representations are those developed by ISO/TC 184/SC 4, by using standardized information models and reference dictionaries.

Definitions and identifications of dictionary entries are defined by means of standard data that consist of instances of the EXPRESS entity data types defined in the common dictionary schema, resulting from a joint effort between ISO/TC 184/SC 4 and IEC/TC 3 and in its extensions defined in ISO 13584-24 and ISO 13584-25.

**(standards.iteh.ai)**

[ISO/TS 13399-80:2017](https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-80e5671a3a05/iso-ts-13399-80-2017)

<https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-80e5671a3a05/iso-ts-13399-80-2017>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/TS 13399-80:2017](https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-80e5671a3a05/iso-ts-13399-80-2017)

<https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-80e5671a3a05/iso-ts-13399-80-2017>

# Cutting tool data representation and exchange —

## Part 80: Creation and exchange of 3D models — Overview and principles

### 1 Scope

This document specifies the basic principles for the creation and exchange of simplified 3D models of cutting items, tool items, and adaptive items, using related properties and domains of values.

Simplified 3D models contain the following:

- naming and defining of the basic design features of cutting items, tool items, and adaptive items, with an association to the used properties;
- naming and defining of the internal structure of the 3D model that represents the features and the properties of cutting items, tool items, and adaptive items;
- naming and defining of those elements and features that are not defined in ISO/TS 13399-50, but are necessary to design 3D models.

The following are outside the scope of this document:

- applications where these standard data may be stored or referenced;
- creation and exchange of simplified 3D models for cutting tools;
- creation and exchange of simplified 3D models for tool items;
- creation and exchange of simplified 3D models for adaptive items;
- creation and exchange of simplified 3D models for assembly items and auxiliary items.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/TS 13399-2, *Cutting tool data representation and exchange — Part 2: Reference dictionary for the cutting items*

ISO/TS 13399-60, *Cutting tool data representation and exchange — Part 60: Reference dictionary for connection systems*

ISO/TS 13399-100:2008, *Cutting tool data representation and exchange — Part 100: Definitions, principles and methods for reference dictionaries*

### 3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <http://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

#### 4 Abbreviated terms

CRPa	cutting reference point
CSWa	coordinate system workpiece side
FDP	feed direction primary
HEP	head end plane
IRPOSa	irregular insert position
KAPa	rotation angle “kappa” for the yzw-plane counter clockwise about the y-axis
LCFP	chip flute length plane
LPRP	protruding length plane
LSP	shank length plane
LUP	usable length plane
MINSTa	master insert
MPLANEa	mirror plane
PAIPa	prismatic adaptive item position
PCSa	primary coordinate system
PHIa	rotation angle “phi” for the xzw-plane counter clockwise about the z-axis
PTIPOSa	prismatic tool item position
REFSYSa	reference system
RHOa	rotation angle “rho” for the xyw-plane counter clockwise about the x-axis
RIPOSa	regular insert position
TCEPa	tool cutting edge plane
TEP	tool end plane
TFPa	tool feed plane
TRPa	tool rake plane
TSPa	theoretical sharp point
XYPa	xy-plane
XYWDa	xyw plane distance
XYWPa	xyw-plane

ITeH STANDARD PREVIEW  
(standards.iteh.ai)

ISO/TS 13399-80:2017  
<https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-80e5671a3a05/iso-ts-13399-80-2017>



XZPa	xz-plane
XZWDa	xzw plane distance
XZWPa	xzw-plane
YZPa	yz-plane
YZWDa	yzw plane distance
YZWPa	yzw-plane

a Taken from ISO/TS 13399-50.

## 5 Designation of design elements

### 5.1 General

The creation of 3D models shall be by means of nominal dimensions.

NOTE Some of the designations are taken from ISO/TS 13399-50.

All designations of 3D design elements (coordinate systems, planes, axes, points, solid design elements) shall be based on the designations and preferred symbols of ISO/TS 13399-2 and ISO/TS 13399-60.

If additional properties are required, they shall be requested through the ISO 13399 Maintenance agency as defined in ISO/TS 13399-100:2008, Annex D.

### 5.2 Reference system

[ISO/TS 13399-80:2017](https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-671c105/iso-ts-13399-80-2017)

[https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-](https://standards.iteh.ai/catalog/standards/sist/4803f6d8-8b1a-48d3-b0c0-671c105/iso-ts-13399-80-2017)

#### 5.2.1 Primary coordinate system "PCS"

The primary coordinate system, as shown in [Figure 1](#), shall consist of the following standard elements:

- right-handed rectangular Cartesian system in three-dimensional space with three principal axes labelled X, Y, and Z;
- three orthogonal planes built from the three principal axes and named "XYP", "XZP", and "YZP";
- three orthogonal axes built from the planes and named "XA", "YA", and "ZA".

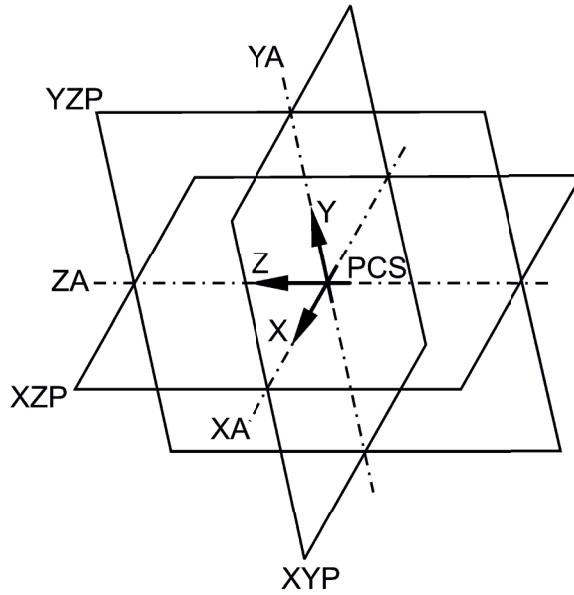


Figure 1 — Primary coordinate system “PCS”

5.2.2 Coordinate system workpiece side “CSW”

iTech STANDARD PREVIEW  
(standards.itech.ai)

5.2.2.1 General

A single coordinate system at the workpiece side is named “coordinate system workpiece side” (CSW) and is used for the mounting of cutting tool components to build a complete cutting tool. If more than one CSW is used to assemble a complete cutting tool, the CSWs shall be indexed.

CSW is a right-handed rectangular Cartesian system in three-dimensional space with three principal axes labelled “XW”, “YW”, and “ZW”. Figure 2 shows an example of CSW orientation.

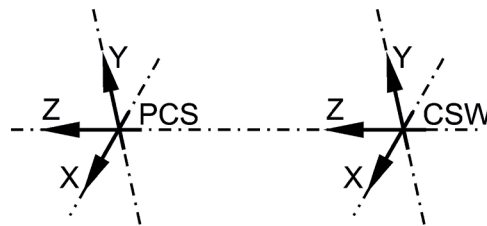


Figure 2 — Example of CSW orientation

5.2.2.2 Case 1: One coordinate system at the workpiece side

A single coordinate system at the workpiece side shall be designated “CSW”.

5.2.2.3 Case 2: One coordinate system at workpiece side on different levels

A single coordinate system on different levels shall be designated “CSWn”, e.g. “CSW1”, “CSW2”. The numbering starts at the workpiece side and ends at the machine side in the direction of the positive Z-axis. On a stepped tool, the CSW closest to the workpiece shall be on level 1, the CSW on the next stepped diameter shall be on the next level.

### 5.2.2.4 Case 3: Multiple coordinate systems at one level and different angles

Multiple coordinate systems at one level, but different angles and not at the centre of the tool axis shall be designated “CSW<sub>n</sub>\_<sub>m</sub>”, where the “n” defines the level and the “m” defines the number of the coordinate system itself. The counting starts at the three o’clock position counting in counter clockwise direction while looking towards the machine spindle (positive Z-axis).

### 5.2.2.5 Case 4: Multiple coordinate systems at one level, one angle and different diameters

The designation is the same as described in case 3. The counting starts at the smallest diameter.

### 5.2.2.6 Case 5: Multiple coordinate systems at multiple levels, different angles and different diameters

The designation is the same as described in case 3. The counting starts at the smallest diameter and at the three o’clock position counting in counter clockwise direction while looking towards the machine spindle (positive Z-axis).

All cases defined above are applicable to tool items, adaptive items, and cutting tools.

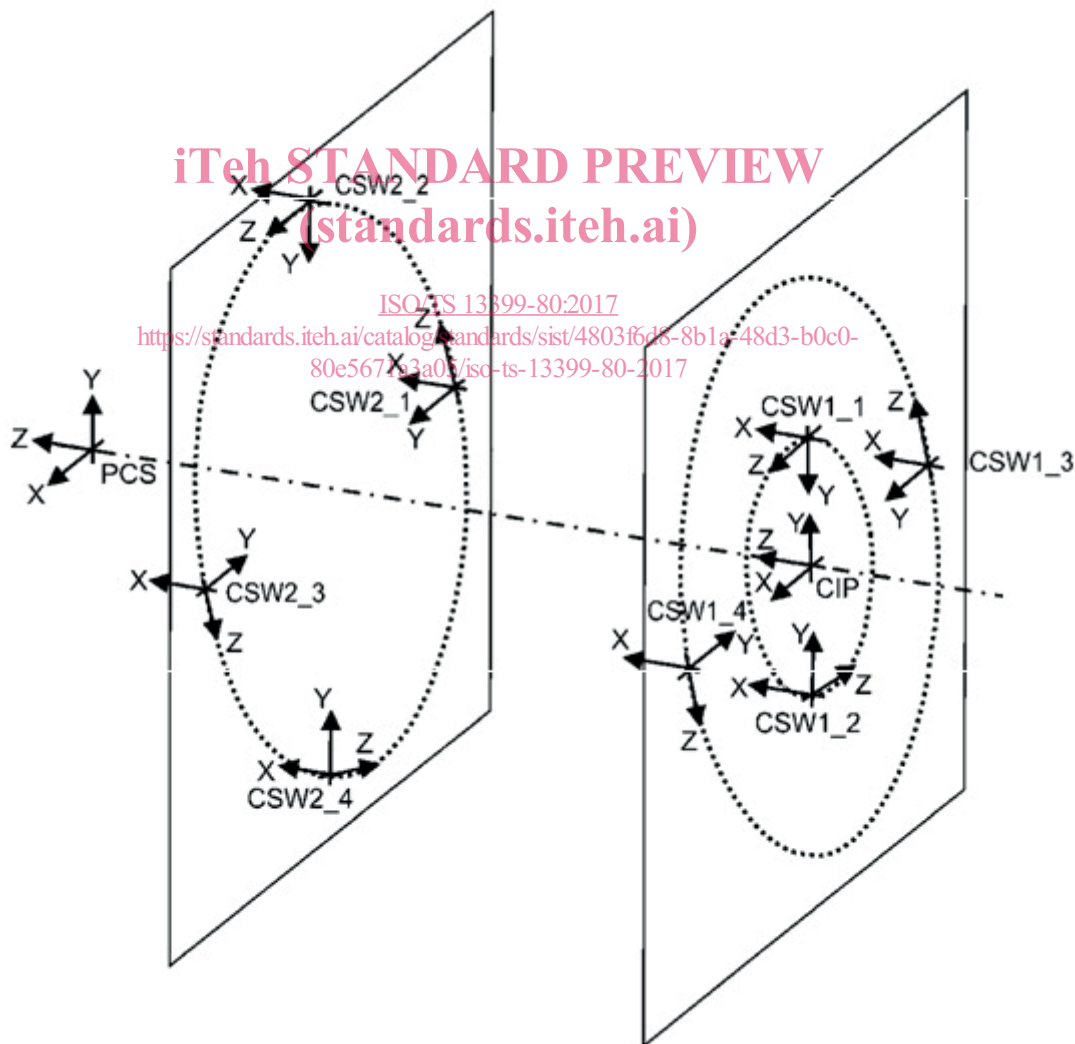


Figure 3 — Adjustment coordinate system on workpiece side

## 5.3 Planes

### 5.3.1 Primary planes

See [5.2.1](#).

### 5.3.2 Planes at workpiece side

For each existing “CSW”, the three planes shall be built from the principal axes and named “XYWP”, “XZWP”, or “YZWP”. If more than one CSW is on the item model, they shall be indexed as defined in [5.2.2](#).

## 5.4 Axes

### 5.4.1 Primary axes

See [5.2.1](#).

### 5.4.2 Axes at workpiece side

For each existing “CSW”, the three planes shall be built from the principal axes and named as “XWA”, “YWA”, or “ZWA”. If more than one CSW is on the item model, they shall be indexed as defined in [5.2.2](#).

## 5.5 Solid design elements

Solid design elements like profiles, revolved bodies, extruded bodies, and so on, as well as their sketches, shall have descriptive and useful names, e.g. for the pocket seat of an insert: “POCKET\_SEAT\_FEATURE”.

## 5.6 Level of detail

### 5.6.1 General

Simplified models shall be differentiated by the level of detail:

- basic model (see [5.6.2](#));
- detail model (see [5.6.3](#)).

Copyright is reserved for the Copyright holder for proprietary information included in the Model.

Model purposes:

- a) Basic model: model is used by receiving applications for NC simulation and collision detection.
- b) Detail model:
  - 1) model is used by receiving applications to create tool or “tool assembly” drawings;
  - 2) model is used by receiving applications to create a basic model;
  - 3) model is used by receiving applications for other documentation purposes;
  - 4) model can also be used for collision detection (for example, during non-cutting movement with stopped spindle).

Defined use cases impact different levels of detail. A production model is not covered by this document because of the impact on data exchange and other processes.

## 5.6.2 Basic model

The basic geometry shall be unambiguous, but not necessarily accurate to reality. The shell of the geometry shall be shown to scale, as well as any detail being used for functionality and identification. No relevant features for unambiguous depiction and/or function can be omitted.

If features located at the periphery shall be simplified, then the maximum dimensions shall be taken for the design of these features. Examinations of collision are possible unconfined in regards of these features.

The design of internal features is at the designer's discretion as long as it is unimportant for the function.

The maximum space of extension shall be enclosed. Features like chamfers, rounding, slots, threads, chip flutes, and internal contours can be omitted as long as they are not relevant for unambiguous depiction.

The basic geometry can be used for the planning of products, operating devices, and equipment. The main focus is on a small data file volume and the characteristic geometrical properties as used for NC-programming and simulation processes.

## 5.6.3 Detailed model

The detailed geometry shall be accurate enough to fulfil its purpose (see 5.6.1). The vendor is entitled to remove any proprietary geometry.

# 6 Colour setting iTeh STANDARD PREVIEW (standards.iteh.ai)

## 6.1 Colour setting for the model

3D model shall have colour settings as follows:

- geometry of the cutting part: light grey with 80 % white [RGB (red green blue): 204/204/204];
- geometry of the shank (interface to machine) and the non-cutting part: grey with 50 % white (RGB: 128/128/128);
- geometry of spare parts (if desired to visualize): dark grey with 30 % white (RGB: 77/77/77).

## 6.2 Colour setting for the cutting edge line and the cutting part line

The aim of this document is to provide 3D models for end-to-end use in the NC process chain including the simulation processes. To ensure this, it is important to add a feature as follows:

- models of replaceable inserts shall contain a closed curve, named "cutting edge line", along the simplified cutting edges;
- models of cutting tools with non-indexable cutting edges shall contain either a closed or an open curve, named "cutting part line" (this curve can be created by means of using the virtual "cross-section" along the tool axis applying on the cutting part).

In both cases, the result shall be a simplified curve, which represents the simplified 3D geometry.

This curve shall be visualized in the model in a blue colour (RGB: 0/0/255); in printed versions of the standards of this document, it shall be visualized in black. The curve shall be grouped to the "CUT" part.

If a CAD-system does not allow the colours to be set as described above, the setting should have a deviation of  $\pm 1$  % of the given RGB values, which shall be interpreted as follows:

- cutting part: 79 % to 81 % white;