

ETSI TS 138 322 V17.3.0 (2023-07)



5G;
NR;

Radio Link Control (RLC) protocol specification (3GPP TS 38.322 version 17.3.0 Release 17)

[ETSI TS 138 322 V17.3.0 \(2023-07\)](https://standards.iteh.ai/catalog/standards/sist/a8cb62ec-9781-4242-8927-59ecc0ed931b/etsi-ts-138-322-v17-3-0-2023-07)

<https://standards.iteh.ai/catalog/standards/sist/a8cb62ec-9781-4242-8927-59ecc0ed931b/etsi-ts-138-322-v17-3-0-2023-07>



ReferenceRTS/TSGR-0238322vh30

Keywords5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://standards-portal.etsi.org/People/CommitteeSupportStaff.aspx> 4242-8927-

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2023.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope	6
2 References	6
3 Definitions, symbols and abbreviations	6
3.1 Definitions	6
3.2 Abbreviations	7
4 General	7
4.1 Introduction	7
4.2 RLC architecture	7
4.2.1 RLC entities	7
4.2.1.1 TM RLC entity	9
4.2.1.1.1 General	9
4.2.1.1.2 Transmitting TM RLC entity	9
4.2.1.1.3 Receiving TM RLC entity	9
4.2.1.2 UM RLC entity	9
4.2.1.2.1 General	9
4.2.1.2.2 Transmitting UM RLC entity	10
4.2.1.2.3 Receiving UM RLC entity	10
4.2.1.3 AM RLC entity	10
4.2.1.3.1 General	10
4.2.1.3.2 Transmitting side	11
4.2.1.3.3 Receiving side	12
4.3 Services	12
4.3.1 Services provided to upper layers	12
4.3.2 Services expected from lower layers	12
4.4 Functions	12
5 Procedures	13
5.1 RLC entity handling	13
5.1.1 RLC entity establishment	13
5.1.2 RLC entity re-establishment	13
5.1.3 RLC entity release	13
5.2 Data transfer procedures	13
5.2.1 TM data transfer	13
5.2.1.1 Transmit operations	13
5.2.1.1.1 General	13
5.2.1.2 Receive operations	14
5.2.1.2.1 General	14
5.2.2 UM data transfer	14
5.2.2.1 Transmit operations	14
5.2.2.1.1 General	14
5.2.2.2 Receive operations	14
5.2.2.2.1 General	14
5.2.2.2.2 Actions when an UMD PDU is received from lower layer	14
5.2.2.2.3 Actions when an UMD PDU is placed in the reception buffer	15
5.2.2.2.4 Actions when t-Reassembly expires	15
5.2.3 AM data transfer	16
5.2.3.1 Transmit operations	16
5.2.3.1.1 General	16
5.2.3.2 Receive operations	16
5.2.3.2.1 General	16

5.2.3.2.2	Actions when an AMD PDU is received from lower layer	17
5.2.3.2.3	Actions when an AMD PDU is placed in the reception buffer.....	17
5.2.3.2.4	Actions when <i>t-Reassembly</i> expires	18
5.3	ARQ procedures.....	18
5.3.1	General.....	18
5.3.2	Retransmission.....	18
5.3.3	Polling.....	19
5.3.3.1	General	19
5.3.3.2	Transmission of a AMD PDU.....	19
5.3.3.3	Reception of a STATUS report.....	20
5.3.3.4	Expiry of <i>t-PollRetransmit</i>	20
5.3.4	Status reporting.....	20
5.4	SDU discard procedures.....	21
5.5	Data volume calculation.....	21
5.6	Handling of unknown, unforeseen and erroneous protocol data	22
5.6.1	Reception of PDU with reserved or invalid values.....	22
6	Protocol data units, formats and parameters.....	22
6.1	Protocol data units	22
6.1.1	General.....	22
6.1.2	RLC data PDU	22
6.1.3	RLC control PDU	22
6.2	Formats and parameters.....	22
6.2.1	General.....	22
6.2.2	Formats	22
6.2.2.1	General	22
6.2.2.2	TMD PDU.....	23
6.2.2.3	UMD PDU.....	23
6.2.2.4	AMD PDU	24
6.2.2.5	STATUS PDU.....	25
6.2.3	Parameters.....	27
6.2.3.1	General	27
6.2.3.2	Data field.....	27
6.2.3.3	Sequence Number (SN) field	27
6.2.3.4	Segmentation Info (SI) field.....	27
6.2.3.5	Segment Offset (SO) field.....	27
6.2.3.6	Data/Control (D/C) field	28
6.2.3.7	Polling bit (P) field.....	28
6.2.3.8	Reserved (R) field	28
6.2.3.9	Control PDU Type (CPT) field.....	28
6.2.3.10	Acknowledgement SN (ACK_SN) field	28
6.2.3.11	Extension bit 1 (E1) field	29
6.2.3.12	Negative Acknowledgement SN (NACK_SN) field.....	29
6.2.3.13	Extension bit 2 (E2) field	29
6.2.3.14	SO start (SOstart) field.....	29
6.2.3.15	SO end (SOend) field	29
6.2.3.16	Extension bit 3 (E3) field	30
6.2.3.17	NACK range field	30
7	Variables, constants and timers	30
7.1	State variables	30
7.2	Constants	32
7.3	Timers	32
7.4	Configurable parameters	32
Annex A (informative):	Change history	34
History		35

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ETSI TS 138 322 V17.3.0 (2023-07)

<https://standards.iteh.ai/catalog/standards/sist/a8cb62ec-9781-4242-8927-59ecc0ed931b/etsi-ts-138-322-v17-3-0-2023-07>

1 Scope

The present document specifies the NR Radio Link Control (RLC) protocol for the UE – NR radio interface.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 38.300: "NR Overall Description; Stage 2".
- [3] 3GPP TS 38.321: "NR MAC protocol specification".
- [4] 3GPP TS 38.323: "NR PDCP specification".
- [5] 3GPP TS 38.331: "NR RRC Protocol specification".
- [6] 3GPP TS 23.287: "Architecture enhancements for 5G System (5GS) to support Vehicle-to-Everything (V2X) services".
- [7] 3GPP TS 38.340: "NR; Backhaul Adaptation Protocol (BAP) specification".
- [8] 3GPP TS 23.304: "Proximity based Services (ProSe) in the 5G System (5GS)".
- [9] 3GPP TS 38.351: "NR; Sidelink Relay Adaptation Protocol (SRAP) Specification".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

Data field element: An RLC SDU or an RLC SDU segment that is mapped to the Data field.

NR sidelink communication: AS functionality enabling at least V2X Communication as defined in TS 23.287 [6] and ProSe communication (including ProSe non-Relay and UE-to-Network Relay communication) as defined in TS 23.304 [8], between two or more nearby UEs, using NR technology but not traversing any network node.

NR sidelink discovery: AS functionality enabling ProSe non-Relay Discovery and ProSe UE-to-Network Relay discovery for Proximity based Services as defined in TS 23.304 [8] between two or more nearby UEs, using NR technology but not traversing any network node.

RLC data volume: The amount of data available for transmission in an RLC entity.

RLC SDU segment: A segment of an RLC SDU.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

AM	Acknowledged Mode
AMD	AM Data
ARQ	Automatic Repeat request
gNB	NR Node B
MBS	Multicast/Broadcast Services
MCCH	MBS Control Channel
MTCH	MBS Traffic Channel
PDU	Protocol Data Unit
RLC	Radio Link Control
SBCCH	Sidelink Broadcast Control Channel
SCCH	Sidelink Control Channel
SDU	Service Data Unit
SN	Sequence Number
STCH	Sidelink Traffic Channel
TB	Transport Block
TM	Transparent Mode
TMD	TM Data
UE	User Equipment
UM	Unacknowledged Mode
UMD	UM Data

STANDARD PREVIEW

4 General (standards.iteh.ai)

4.1 Introduction ETSI TS 138 322 V17.3.0 (2023-07) <https://standards.iteh.ai/catalog/standards/sist/a8cb62ec-9781-4242-8927->

The objective is to describe the RLC architecture and the RLC entities from a functional point of view.

4.2 RLC architecture

4.2.1 RLC entities

The description in this clause is a model and does not specify or restrict implementations.

RRC is generally in control of the RLC configuration.

Functions of the RLC sub layer are performed by RLC entities. For an RLC entity configured at the gNB, there is a peer RLC entity configured at the UE and vice versa. In NR sidelink communication, in NR sidelink discovery, for an RLC entity configured at the transmitting UE, there is a peer RLC entity configured at each receiving UE.

An RLC entity receives/delivers RLC SDUs from/to upper layer and sends/receives RLC PDUs to/from its peer RLC entity via lower layers.

An RLC PDU can either be an RLC data PDU or an RLC control PDU. If an RLC entity receives RLC SDUs from upper layer, it receives them through a single RLC channel between RLC and upper layer, and after forming RLC data PDUs from the received RLC SDUs, the RLC entity submits the RLC data PDUs to lower layer through a single logical channel. If an RLC entity receives RLC data PDUs from lower layer, it receives them through a single logical channel, and after forming RLC SDUs from the received RLC data PDUs, the RLC entity delivers the RLC SDUs to upper layer through a single RLC channel between RLC and upper layer. If an RLC entity submits/receives RLC control PDUs to/from lower layer, it submits/receives them through the same logical channel it submits/receives the RLC data PDUs through.

NOTE 1: In case the upper layer is BAP as defined in TS 38.340 [7], an RLC channel refers to a Backhaul RLC channel.

NOTE 2: In case the upper layer is SRAP as defined in TS 38.351 [9], an RLC channel refers to either a PC5 Relay RLC channel or a Uu Relay RLC channel.

An RLC entity can be configured to perform data transfer in one of the following three modes: Transparent Mode (TM), Unacknowledged Mode (UM) or Acknowledged Mode (AM). Consequently, an RLC entity is categorized as a TM RLC entity, an UM RLC entity or an AM RLC entity depending on the mode of data transfer that the RLC entity is configured to provide.

A TM RLC entity is configured either as a transmitting TM RLC entity or a receiving TM RLC entity. The transmitting TM RLC entity receives RLC SDUs from upper layer and sends RLC PDUs to its peer receiving TM RLC entity via lower layers. The receiving TM RLC entity delivers RLC SDUs to upper layer and receives RLC PDUs from its peer transmitting TM RLC entity via lower layers.

An UM RLC entity is configured either as a transmitting UM RLC entity or a receiving UM RLC entity. The transmitting UM RLC entity receives RLC SDUs from upper layer and sends RLC PDUs to its peer receiving UM RLC entity via lower layers. The receiving UM RLC entity delivers RLC SDUs to upper layer and receives RLC PDUs from its peer transmitting UM RLC entity via lower layers.

An AM RLC entity consists of a transmitting side and a receiving side. The transmitting side of an AM RLC entity receives RLC SDUs from upper layer and sends RLC PDUs to its peer AM RLC entity via lower layers. The receiving side of an AM RLC entity delivers RLC SDUs to upper layer and receives RLC PDUs from its peer AM RLC entity via lower layers.

Figure 4.2.1-1 illustrates the overview model of the RLC sub layer.

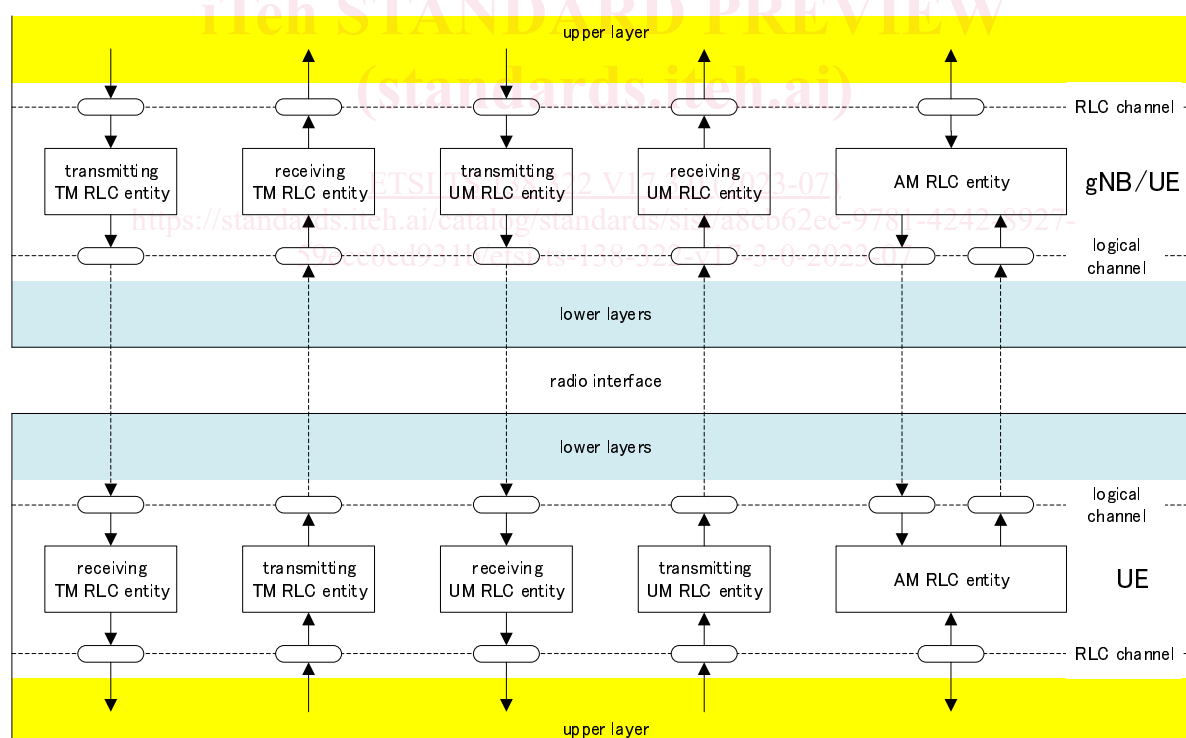


Figure 4.2.1-1: Overview model of the RLC sub layer

RLC SDUs of variable sizes which are byte aligned (i.e. multiple of 8 bits) are supported for all RLC entity types (i.e. TM, UM and AM RLC entity).

Each RLC SDU is used to construct an RLC PDU without waiting for notification from the lower layer (i.e., by MAC) of a transmission opportunity. In the case of UM and AM RLC entities, an RLC SDU may be segmented and transported using two or more RLC PDUs based on the notification(s) from the lower layer.

RLC PDUs are submitted to lower layer only when a transmission opportunity has been notified by lower layer (i.e. by MAC).

NOTE 2: The UE should aim to prevent excessive non-consecutive RLC PDUs in a MAC PDU when the UE is requested to generate more than one MAC PDU.

Description of different RLC entity types are provided below.

4.2.1.1 TM RLC entity

4.2.1.1.1 General

A TM RLC entity can be configured to submit/receive RLC PDUs through the following logical channels:

- BCCH, DL/UL CCCH, PCCH, and SBCCH.

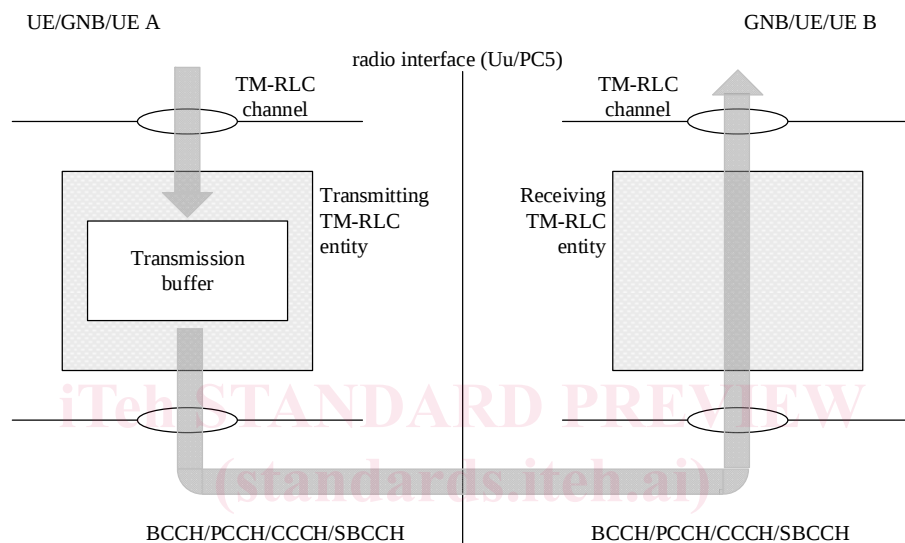


Figure 4.2.1.1-1: Model of two transparent mode peer entities

A TM RLC entity submits/receives the following RLC data PDU:

- TMD PDU.

4.2.1.1.2 Transmitting TM RLC entity

When a transmitting TM RLC entity forms TMD PDUs from RLC SDUs, it shall:

- not segment the RLC SDUs;
- not include any RLC headers in the TMD PDUs.

4.2.1.1.3 Receiving TM RLC entity

When a receiving TM RLC entity receives TMD PDUs, it shall:

- deliver the TMD PDUs (which are just RLC SDUs) to upper layer.

4.2.1.2 UM RLC entity

4.2.1.2.1 General

An UM RLC entity can be configured to submit/receive RLC PDUs through the following logical channels:

- DL/UL DTCH, SCCH, STCH, MCCH, and MTCH.

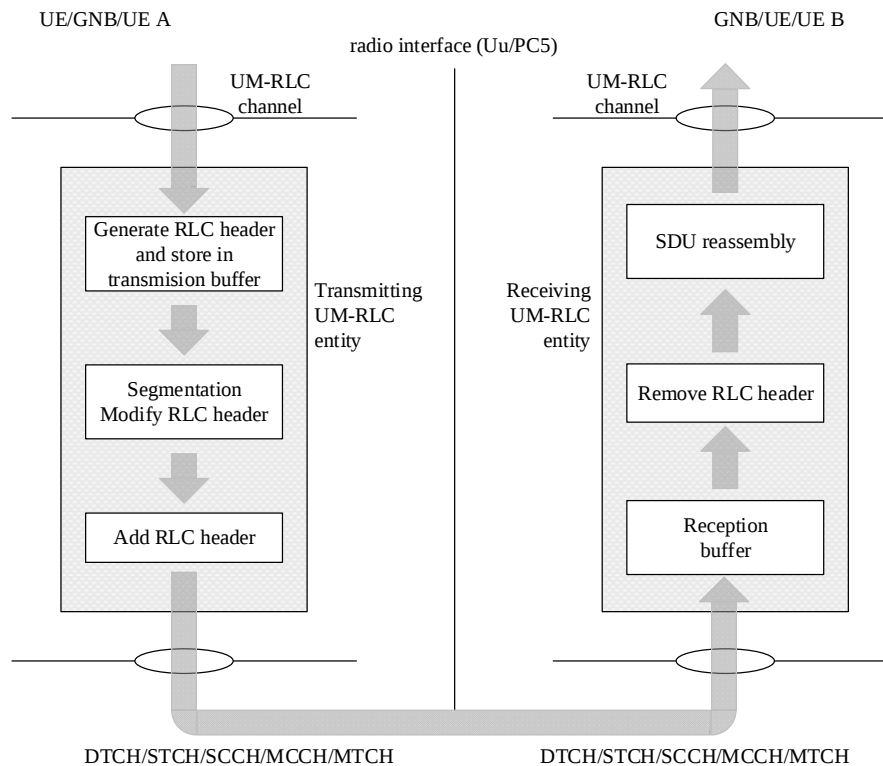


Figure 4.2.1.2.1-1: Model of two unacknowledged mode peer entities

An UM RLC entity submits/receives the following RLC data PDU:

- UMD PDU.

An UMD PDU contains either one complete RLC SDU or one RLC SDU segment.

NOTE: For groupcast and broadcast of NR sidelink communication or for NR sidelink discovery only uni-directional UM mode is supported.

4.2.1.2.2 Transmitting UM RLC entity

The transmitting UM RLC entity generates UMD PDU(s) for each RLC SDU. It shall include relevant RLC headers in the UMD PDU. When notified of a transmission opportunity by the lower layer, the transmitting UM RLC entity shall segment the RLC SDUs, if needed, so that the corresponding UMD PDUs, with RLC headers updated as needed, fit within the total size of RLC PDU(s) indicated by lower layer.

4.2.1.2.3 Receiving UM RLC entity

When a receiving UM RLC entity receives UMD PDUs, it shall:

- detect the loss of RLC SDU segments at lower layers;
- reassemble RLC SDUs from the received UMD PDUs and deliver the RLC SDUs to upper layer as soon as they are available;
- discard received UMD PDUs that cannot be re-assembled into an RLC SDU due to loss at lower layers of an UMD PDU which belonged to the particular RLC SDU.

4.2.1.3 AM RLC entity

4.2.1.3.1 General

An AM RLC entity can be configured to submit/receive RLC PDUs through the following logical channels:

- DL/UL DCCH, DL/UL DTCH, SCCH, and STCH.

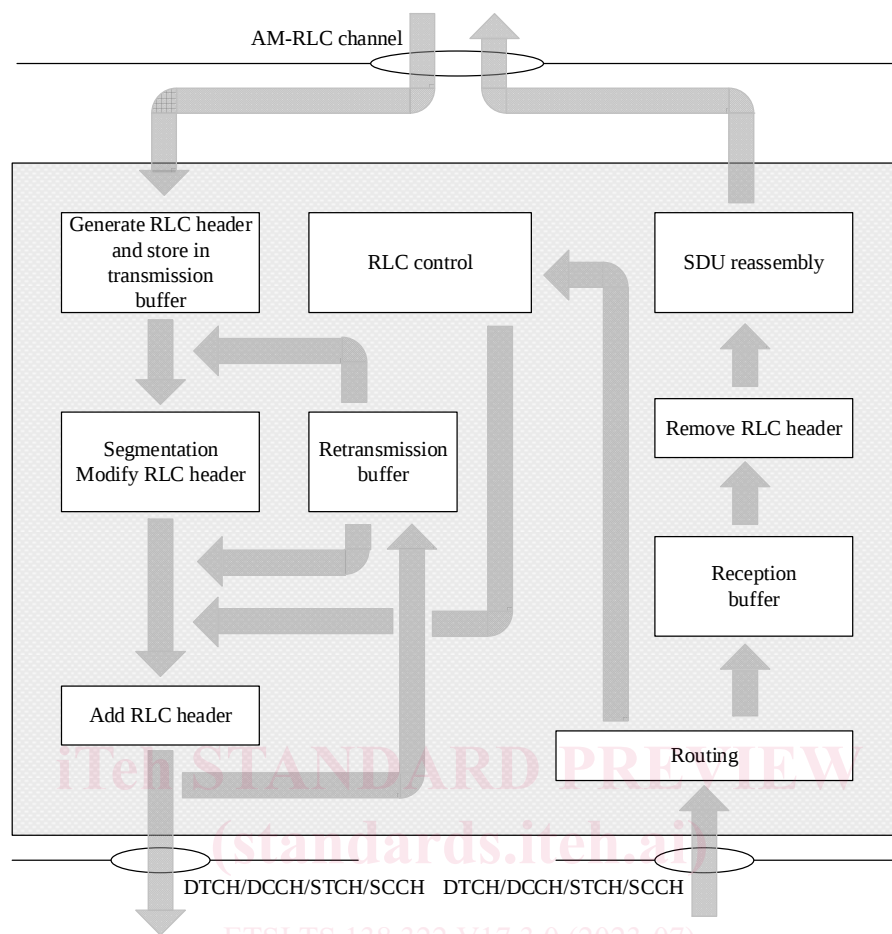


Figure 4.2.1.3.1-1: Model of an acknowledged mode entity

An AM RLC entity delivers/receives the following RLC data PDUs:

- AMD PDU.

An AMD PDU contains either one complete RLC SDU or one RLC SDU segment.

An AM RLC entity delivers/receives the following RLC control PDU:

- STATUS PDU.

4.2.1.3.2 Transmitting side

The transmitting side of an AM RLC entity generates AMD PDU(s) for each RLC SDU. When notified of a transmission opportunity by the lower layer, the transmitting AM RLC entity shall segment the RLC SDUs, if needed, so that the corresponding AMD PDUs, with RLC headers updated as needed, fit within the total size of RLC PDU(s) indicated by lower layer.

The transmitting side of an AM RLC entity supports retransmission of RLC SDUs or RLC SDU segments (ARQ):

- if the RLC SDU or RLC SDU segment to be retransmitted (including the RLC header) does not fit within the total size of RLC PDU(s) indicated by lower layer at the particular transmission opportunity notified by lower layer, the AM RLC entity can segment the RLC SDU or re-segment the RLC SDU segments into RLC SDU segments;
- the number of re-segmentation is not limited.

When the transmitting side of an AM RLC entity forms AMD PDUs from RLC SDUs or RLC SDU segments, it shall: