

# SLOVENSKI STANDARD

## oSIST prEN 4165-011:2021

01-oktober-2021

---

**Aeronautika - Konektorji, električni, pravokotni, modularni - Stalna delovna temperatura 175 °C - 011. del: Podlaga s prirobnico z 2 ali 4 moduli, serija 2 - Standard za proizvod**

Aerospace series - Connectors, electrical, rectangular, modular - Operating temperature 175 °C continuous - Part 011: Flange mounting receptacle 2 and 4 modules, series 2 - Product standard

**iTeh STANDARD PREVIEW**  
Luft- und Raumfahrt - Elektrischer Rechtecksteckverbinder in modularer Bauweise - Betriebstemperatur 175 °C konstant - Teil 011: Feste Steckverbinder mit Montageflansch mit 2 und 4 Modulen, Serie 2 - Produktnorm  
<https://standards.iteh.ai/catalog/standards/sist/3ea67101-9154-40ca-b4cd-772f203f1422/osist-pr-en-4165-011-2021>

**Ta slovenski standard je istoveten z: prEN 4165-011**

---

**ICS:**

31.220.10	Vtiči in vtičnice, konektorji	Plug-and-socket devices. Connectors
49.060	Letalska in vesoljska električna oprema in sistemi	Aerospace electric equipment and systems

**oSIST prEN 4165-011:2021**

**en,fr,de**

## iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN 4165-011:2021

<https://standards.iteh.ai/catalog/standards/sist/3ea67101-9154-40ca-b4cd-772f203f1422/osist-pren-4165-011-2021>

**EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM**

**DRAFT  
prEN 4165-011**

August 2021

ICS 49.060

Will supersede EN 4165-011:2007

English Version

**Aerospace series - Connectors, electrical, rectangular,  
modular - Operating temperature 175 °C continuous - Part  
011: Flange mounting receptacle 2 and 4 modules, series 2  
- Product standard**

Luft- und Raumfahrt - Elektrischer  
Rechtecksteckverbinder in modularer Bauweise -  
Betriebstemperatur 175 °C konstant - Teil 011: Feste  
Steckverbinder mit Montageflansch mit 2 und 4  
Modulen, Serie 2 - Produktnorm

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee ASD-STAN.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

**Warning :** This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels**

## prEN 4165-011:2021 (E)

Contents	Page
<b>European foreword .....</b>	<b>3</b>
<b>1 Scope.....</b>	<b>4</b>
<b>2 Normative references.....</b>	<b>4</b>
<b>3 Terms and definitions .....</b>	<b>4</b>
<b>4 Required characteristics.....</b>	<b>4</b>
<b>5 Flange mounting receptacle.....</b>	<b>5</b>
<b>5.1 For 2 modules classes W, F, J, M and A.....</b>	<b>5</b>
<b>5.2 For 4 modules classes W, F, J, M and A.....</b>	<b>6</b>
<b>5.3 Receptacle class.....</b>	<b>7</b>
<b>6 Designation .....</b>	<b>8</b>
<b>7 Marking .....</b>	<b>8</b>
<b>8 Technical specification<del>TEH STANDARD PREVIEW</del> <b>(standards.itech.ai)</b></b>	<b>8</b>
<b>Bibliography .....</b>	<b>9</b>

[oSIST prEN 4165-011:2021](https://standards.itech.ai/catalog/standards/sist/3ea67101-9154-40ca-b4cd-772f203f1422/osist-pren-4165-011-2021)  
<https://standards.itech.ai/catalog/standards/sist/3ea67101-9154-40ca-b4cd-772f203f1422/osist-pren-4165-011-2021>

## European foreword

This document (prEN 4165-011:2021) has been prepared by the Aerospace and Defence Industries Association of Europe — Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this document has received the approval of the National Associations and the Official Services of the member countries of ASD-STAN, prior to its presentation to CEN.

This document is currently submitted to the CEN Enquiry.

This document will supersede EN 4165-011:2007.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN 4165-011:2021](#)  
<https://standards.iteh.ai/catalog/standards/sist/3ea67101-9154-40ca-b4cd-772f203f1422/osist-pr-en-4165-011-2021>

## prEN 4165-011:2021 (E)

### 1 Scope

This document defines the flange mounting receptacle 2 and 4 modules, series 2 used in the family of rectangular electrical connectors. The plugs corresponding to those receptacles are defined in EN 4165-002.

The protective covers corresponding to those receptacles are defined in EN 4165-018.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 4165-001, *Aerospace series - Connectors, electrical, rectangular, modular - Operating temperature 175 °C continuous - Part 001: Technical specification*

EN 4165-002, *Aerospace series - Connectors, electrical, rectangular, modular - Operating temperature 175 °C continuous - Part 002: Specification of performance and contact arrangements*

EN 4165-018, *Aerospace series - Connectors, electrical, rectangular, modular - Operating temperature 175 °C continuous - Part 018: Protective cover for all receptacles series 2 - Product standard*

### 3 Terms and definitions

## The STANDARD PREVIEW (standards.ieh.ai)

For the purposes of this document, the terms and definitions given in EN 4165-001 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>  
oSIST prEN 4165-011:2021  
https://standards.ieh.ai/catalog/standards/sist/3ea67101-9154-40ca-b4cd-772f203f1422/prist-prep-4165-011-2021
- IEC Electropedia: available at <https://www.electropedia.org/>


### 4 Required characteristics

See Figure 1 for 2 modules and Figure 2 for 4 modules.

## 5 Flange mounting receptacle

### 5.1 For 2 modules classes W, F, J, M and A

Dimensions are in millimetres

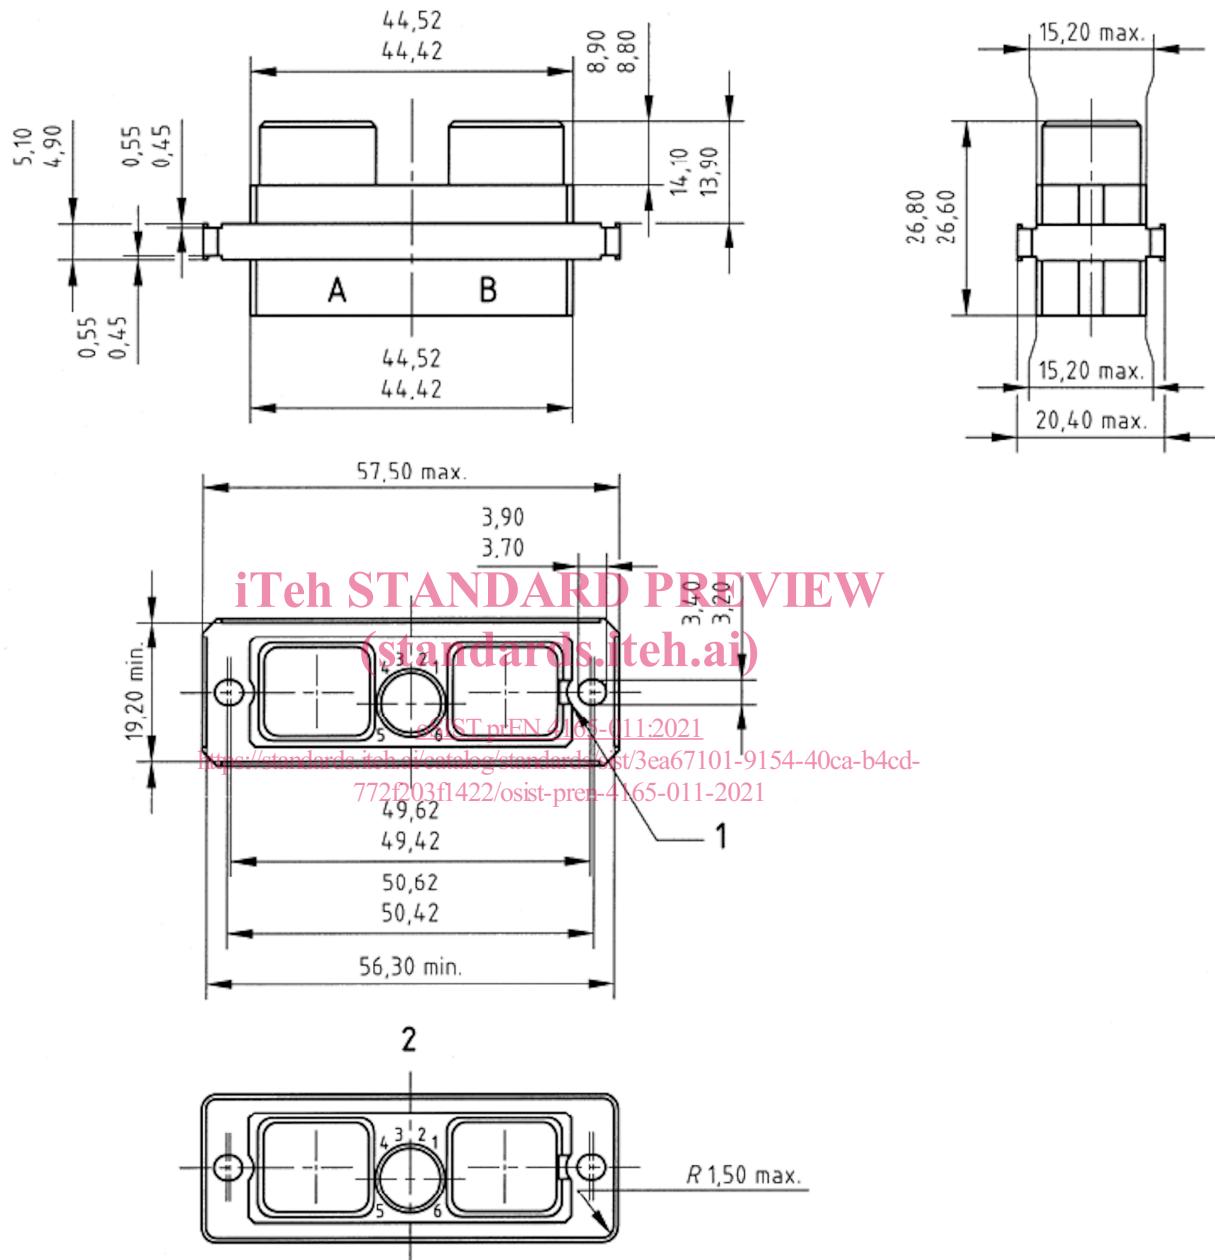

#### Key


- 1 Groove only for class W, F and A
- 2 Accepted form of flange

Figure 1

## prEN 4165-011:2021 (E)

## 5.2 For 4 modules classes W, F, J, M and A

Dimensions are in millimetres

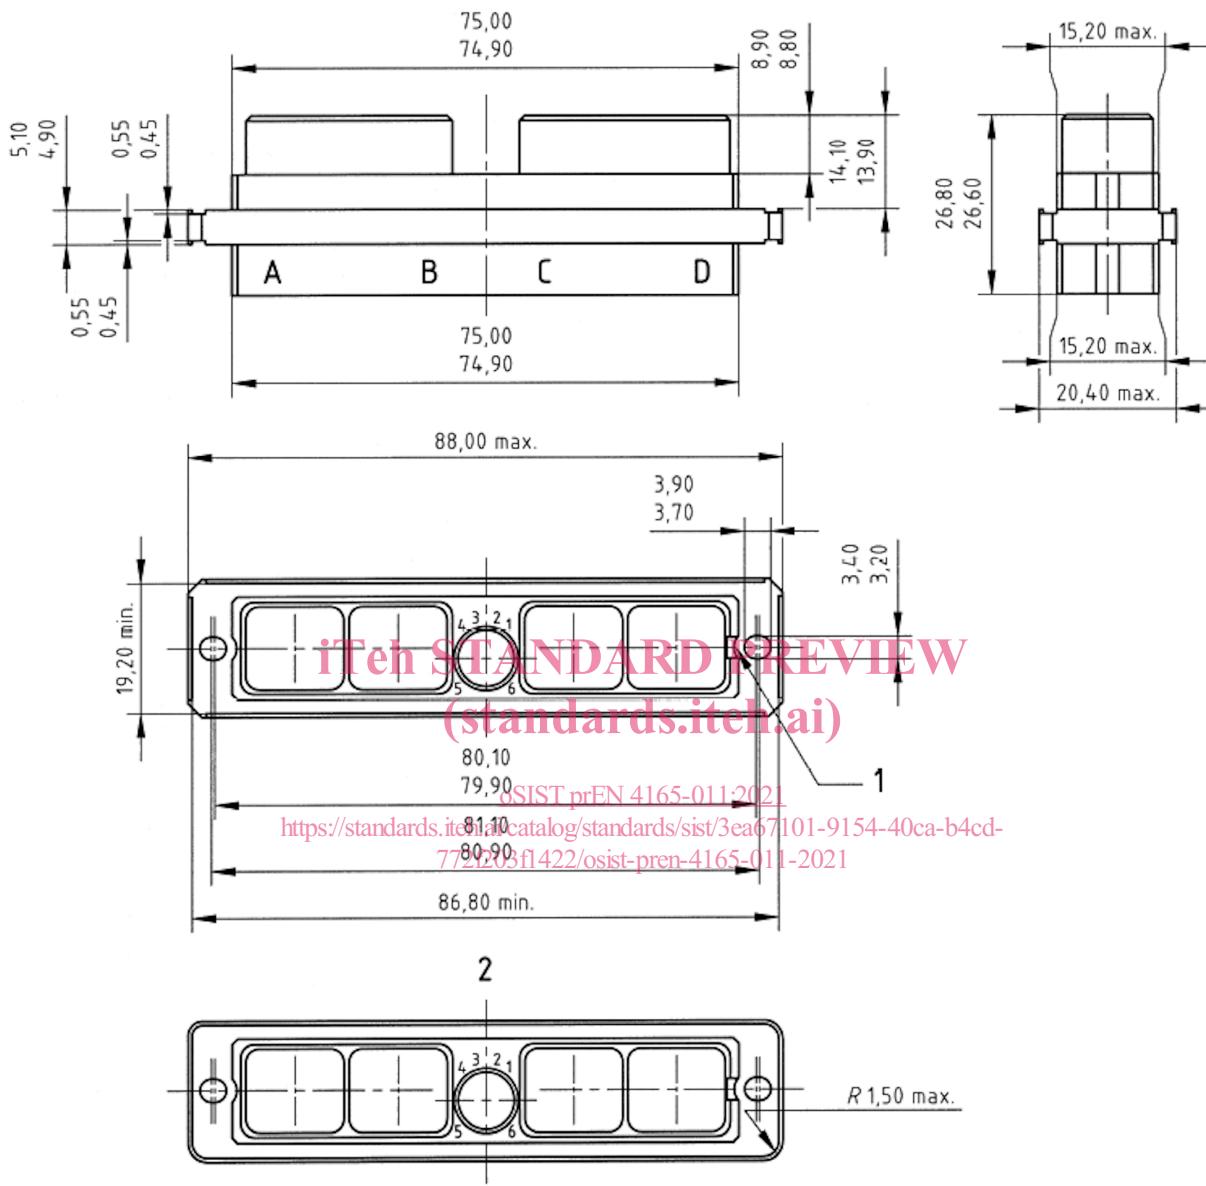

## Key

- 1 Groove only for class W, F and A
- 2 Accepted form of flange

Figure 2

### 5.3 Receptacle class

See Table 1.

**Table 1**

Class	Description
<b>W</b>	Flange mounting receptacles with housing (shell) olive drab cadmium plated, aluminium alloy, conductive finish, 500 hours resistance to salt mist, maximum operating temperature 175 °C continuous.
<b>F</b>	Flange mounting receptacles with housing (shell) black nickel plated, aluminium alloy, 96 hours resistance to salt mist, maximum operating temperature 175 °C continuous
<b>J</b>	Flange mounting receptacles with housing (shell) olive drab cadmium plated, composite material, conductive finish, 500 hours resistance to salt mist, maximum operating temperature 175 °C continuous.
<b>M</b>	Flange mounting receptacles with housing (shell) nickel plated, composite material, conductive finish, 500 hours resistance to salt mist, maximum operating temperature 175 °C continuous.
<b>A</b>	Flange mounting receptacles with housing (shell) black anodised plated, aluminium alloy, non-conductive finish, 48 hours resistance to salt mist, maximum operating temperature 175 °C continuous.

**iTEH STANDARD PREVIEW**  
**(standards.iteh.ai)**

[oSIST prEN 4165-011:2021](https://standards.iteh.ai/catalog/standards/sist/3ea67101-9154-40ca-b4cd-772f203f1422/osist-pren-4165-011-2021)  
<https://standards.iteh.ai/catalog/standards/sist/3ea67101-9154-40ca-b4cd-772f203f1422/osist-pren-4165-011-2021>

**prEN 4165-011:2021 (E)****6 Designation**

EXAMPLE

<b>Description block</b>	<b>Identity block</b>
<b>ELECTRICAL CONNECTOR RECEPTACLE</b>	<b>EN4165F7A400</b>
Number of the basic standard _____	
Class type (see Table 1) _____	
Type 7: Receptacle (see EN 4165-002) _____	
A = series 2 _____	
Shell type _____	
4 = receptacle 4 modules	
2 = receptacle 2 modules	
Receptacle keying coupling (number not marked on connector) _____	
0 - Not delivered	
A = Standard	
1 2 3 4 5 6	<b>iTeh STANDARD PREVIEW</b> <b>(standards.iteh.ai)</b> <small>oSIST prEN 4165-011:2021</small> <small><a href="https://standards.iteh.ai/catalog/standards/sist/3ea67101-9154-40ca-b4cd-772120311422/prEN-4165-011-2021">https://standards.iteh.ai/catalog/standards/sist/3ea67101-9154-40ca-b4cd-772120311422/prEN-4165-011-2021</a></small>
State of delivery receptacle keying coupling (see EN 4165-020) _____ <small>(Not marked on the connector)</small>	
0 - Delivered: not fitted	
1 2 3 4 5 6	<small>Fitted in the receptacle</small>

**7 Marking**

Marking shall include:

- the identity block as defined in Clause 6;
- the date of manufacture (year-week);
- the manufacturer's name or trademark.

**8 Technical specification**

See EN 4165-001.