INTERNATIONAL STANDARD

ISO 5468

Fourth edition 2017-02

Rotary and rotary impact masonry drill bits with hardmetal tips — Dimensions

Forets pour bâtiment, à rotation et percussion, à plaquettes en métaldur (carbures métalliques) — Dimensions

iTeh STANDARD PREVIEW (standards.iteh.ai)



iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 5468:2017 https://standards.iteh.ai/catalog/standards/sist/76144dba-7db8-4d6f-8b22-8bb46951cc12/iso-5468-2017



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Ch. de Blandonnet 8 • CP 401 CH-1214 Vernier, Geneva, Switzerland Tel. +41 22 749 01 11 Fax +41 22 749 09 47 copyright@iso.org www.iso.org

Con	ntents	Page
Forev	word	iv
Intro	oduction	v
1	Scope	1
2	Normative references	1
3	Terms and definitions	1
4	Dimensions	1
Anne	ex A (informative) Relationship between designations in this document and ISO 13399 series	3
Riblia	ingranhy	4

iTeh STANDARD PREVIEW (standards.iteh.ai)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html. (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 29, Small tools, Subcommittee SC 9, Tools with defined cutting edges, cutting items. $\frac{ISO~5468:2017}{\text{https://standards.iteh.ai/catalog/standards/sist/76144dba-7db8-4d6f-8b22-}}$

This fourth edition cancels and replaces the third edition (ISO 5468:2006), of which it constitutes a minor revision with the following changes:

added <u>Annex A</u> giving the relationship between the symbols of this document and the symbols according to the ISO 13399 series.

Introduction

This document has been prepared with due regard to the relationship between the masonry drill bits themselves, their tolerances and the holes which they produce in order that plugs and fixings may be positively located.

Account has been taken of the sizes which are in greatest demand and the range of diameters shown has been established only after several years of market research. Due recognition has also been given to the requirements of modern drilling technology, particularly, the development of rotary impact drilling.

iTeh STANDARD PREVIEW (standards.iteh.ai)

iTeh STANDARD PREVIEW (standards.iteh.ai)

Rotary and rotary impact masonry drill bits with hardmetal tips — Dimensions

1 Scope

This document specifies the dimensions, in millimetres, of rotary and rotary impact masonry drill bits with hardmetal tips, having diameters in the range of 4 mm to 25 mm inclusive and overall, and working lengths in the series short, long and extra-long.

It does not apply to hammer drills.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

No terms and definitions are listed in this document.


ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

https://standards.iteh.ai/catalog/standards/sist/76144dba-7db8-4d6f-8b22-8bb46951cc12/iso-5468-2017

4 Dimensions

The dimensions and tolerances are shown in <u>Figure 1</u> and given in <u>Table 1</u>.

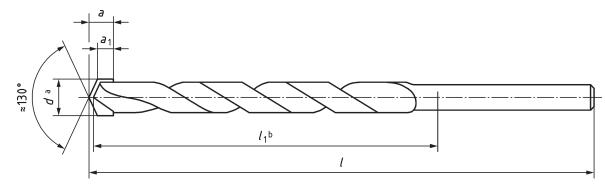

Key

- a height of tip
- a₁ shoulder of tip
- d cutting diameter
- l total length
- l_1 working length
- The diameter d is measured across the corner of the hardmetal tip after removal of paint or protective coating.
- b The length l_1 corresponds to the overhang length of the chuck.

Figure 1

Table 1Dimensions in millimetres

				Short series		Long series		Extra-long series (wall breakthrough)							
d		aa	a ₁ a	1	$\approx l_1$	1	$\approx l_1$	1	$\approx l_1$	1	$\approx l_1$	Chuck size ^b			
nom.	tol.	min.	min.												
4	0.40	0.40		75	39							10			
4,5															
5	+0,40 +0,15			85	39							10			
5,5	0,8 <i>d</i>		0,20	-,	0,8 <i>d</i>	0,57 <i>d</i>			150	85	_	_	_	_	10 or
6													13		
6,5				100	54										
7	+0,45	5													
8	+0,45														
9			120 80	200	135	_	_ _	_	_						
10															
11	_	0,7 <i>d</i>	0,47 <i>d</i>									10,			
12	-					220	150	400	350	600	550	13			
13	1 .02	j	T 1501	S ₉₀ A	NDA	RD	PRE	VE	W	_	or 16				
14				da it	oh o										
15				(Sta	IIUai	u5.11	eh.a)							
16		0,6 <i>d</i>	0,37d			ISO 5	468:2017	400	350	600	550				
18			https		s.iteh.ai/ca			76144dba	-7db8-4d	6f-8b22-					
20	_		1		8bb	46951cc1						13			
22	+0,55 +0,20	0.55,	0.00.7	160	100							or			
24	+0,20	0,55 <i>d</i>	0,32 <i>d</i>						_	-		16			
25										600	550				

^a This dimension, a or a_1 , shall be observed.

b Required size depending upon the actual diameter of the shank.

Annex A

(informative)

Relationship between designations in this document and ISO 13399 series

For the relationship between the designations in this document and preferred symbols according to ISO 13399 series, see $\underline{\text{Table A.1}}$.

Table A.1 — Relationship between designations in this document and ISO 13399 series

Symbol in this document	Reference in this document	Property name in the ISO 13399 series	Symbol in the ISO 13399 series	Reference in the ISO 13399 series
d	<u>Figure 1</u> <u>Table 1</u>	cutting diameter	DC	71D084653E57F
l_1	<u>Figure 1</u> <u>Table 1</u>	tool assembly length	LTA	728B074A39EBC
1	Figure 1 i Table 1 ST	Noverall length R	EVIEOAL	71D078EB7C086
≈130°	Figure 1	ndapointangle	SIG	71DCCC4FEF366

<u>ISO 5468:2017</u>