

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[oSIST prEN ISO 4210-6:2022](https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec5f9d8888e/osist-pren-iso-4210-6-2022)

<https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec5f9d8888e/osist-pren-iso-4210-6-2022>

DRAFT INTERNATIONAL STANDARD

ISO/DIS 4210-6

ISO/TC 149/SC 1

Secretariat: JISC

Voting begins on:
2021-11-05Voting terminates on:
2022-01-28

Cycles — Safety requirements for bicycles —

Part 6: Frame and fork test methods

*Cycles — Exigences de sécurité des bicyclettes —**Partie 6: Méthodes d'essai du cadre et de la fourche*

ICS: 43.150

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 4210-6:2022](https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec5f9d8888e/osist-pren-iso-4210-6-2022)<https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec5f9d8888e/osist-pren-iso-4210-6-2022>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.

ISO/CEN PARALLEL PROCESSING



Reference number
ISO/DIS 4210-6:2021(E)

© ISO 2021

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 4210-6:2022
https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec59d8888e/osist-pren-iso-4210-6-2022](https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec59d8888e/osist-pren-iso-4210-6-2022)



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

This template allows you to work with default MS Word functions and styles. You can use these if you want to maintain the Table of Contents automatically and apply auto-numbering.

To update the Table of Contents please select it and press "F9".

Foreword.....	v
Introduction.....	vi
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions	1
4 Frame test methods	1
4.1 Frame — Impact test (falling mass)	1
4.1.1 General.....	1
4.1.2 Test method.....	2
4.2 Frame and front fork assembly — Impact test (falling frame).....	4
4.2.1 General.....	4
4.2.2 Test method.....	4
4.3 Frame — Fatigue test with pedalling forces.....	6
4.3.1 General.....	6
4.3.2 Test method.....	7
4.4 Frame — Fatigue test with horizontal forces.....	8
4.4.1 General.....	8
4.4.2 Test method.....	9
4.5 Frame — Fatigue test with a vertical force.....	9
4.5.1 General.....	9
4.5.2 Test method.....	10
4.6 Rear brake mount tests	11
4.6.1 General.....	11
4.6.2 Static rear brake torque test	11
4.6.3 Rear brake mount fatigue test	12
5 Fork test methods.....	14
5.1 Suspension forks — Tyre-clearance test.....	14
5.2 Front fork — Tensile test.....	14
5.2.1 Test method — Suspension fork	14
5.2.2 Test method — Rigid, non-welded fork.....	14
5.3 Front fork — Static bending test	14
5.4 Front fork — Rearward impact test	15
5.4.1 Test method 1	15
5.4.2 Test method 2 (only for forks made entirely of metal)	17
5.4.3 Test method 3	17
5.5 Front fork — Bending fatigue test and rearward impact test.....	18
5.6 Forks intended for use with hub or disc brakes.....	19
5.6.1 General.....	19
5.6.2 Fork for hub/disc brake — Static brake-torque test	19
5.6.3 Fork for hub/disc brake — Brake mount fatigue test.....	20
5.6.4 Fork made of composite materials designed for disc brakes.....	21
5.6.5 Fork for hub/disc brake — Brake mount fatigue test for composite rigid and suspension forks.....	23
5.7 Fork steerer tube and stem assembly — Fatigue Test	23

ISO/DIS 4210-6:2021(E)

5.7.1	General	23
5.7.2	Test method	23
	Annex A (normative) Dummy fork characteristics	25
	Annex B (normative) Fork mounting fixture	27
	Annex C (informative) Suspension frames — Tyre-clearance test	28
C.1	Suspension frames — Tyre-clearance test	28
C.1.1	Requirements	28
C.1.2	Test method	28

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[oSIST prEN ISO 4210-6:2022](https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec59d8888e/osist-pren-iso-4210-6-2022)
<https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec59d8888e/osist-pren-iso-4210-6-2022>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 149, *Cycles*, Subcommittee SC 1, *Cycles and major sub-assemblies*.

This **third** edition cancels and replaces the **second** edition (ISO 4210-6:2015), which has been technically revised.

The main changes compared to the previous edition are as follows:

— xxx xxxxxxxx xxx xxxxx

A list of all parts in the ISO 4210 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

ISO/DIS 4210-6:2021(E)

Introduction

This International Standard has been developed in response to demand throughout the world, and the aim has been to ensure that bicycles manufactured in compliance with this International Standard will be as safe as is practically possible. The tests have been designed to ensure the strength and durability of individual parts as well as of the bicycle as a whole, demanding high quality throughout and consideration of safety aspects from the design stage onwards.

The scope has been limited to safety considerations, and has specifically avoided standardization of components.

If the bicycle is to be used on public roads, national regulations apply.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 4210-6:2022](https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec59d8888e/osist-pren-iso-4210-6-2022)
<https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec59d8888e/osist-pren-iso-4210-6-2022>

1 Cycles — Safety requirements for bicycles — Part 6: Frame and 2 fork test methods

3 1 Scope

4 This part of ISO 4210 specifies the frame and fork test methods for ISO 4210-2.

5 2 Normative references

6 The following documents are referred to in the text in such a way that some or all of their content
7 constitutes requirements of this document. For dated references, only the edition cited applies. For
8 undated references, the latest edition of the referenced document (including any amendments) applies.

9 ISO 4210-1, *Cycles — Safety requirements for bicycles — Part 1: Terms and definitions*

10 ISO 4210-2, *Cycles — Safety requirements for bicycles — Part 2: Requirements for city and trekking, young
11 adult, mountain and racing bicycles*

12 ISO 4210-3, *Cycles — Safety requirements for bicycles — Part 3: Common test methods*

13 ISO 4210-5, *Cycles — Safety requirements for bicycles — Part 5: Steering test methods*

iTeh STANDARD PREVIEW

14 3 Terms and definitions (standards.iteh.ai)

15 For the purposes of this document, the terms and definitions given in ISO 4210-1 apply.

16 ISO and IEC maintain terminological databases for use in standardization at the following addresses:

17 — ISO Online browsing platform: available at <https://www.iso.org/obp>

18 — IEC Electropedia: available at <http://www.electropedia.org/>

19 4 Frame test methods

20 4.1 Frame — Impact test (falling mass)

21 4.1.1 General

22 Manufacturers of frames are permitted to conduct the test with a dummy fork (see Annex A) fitted in
23 place of a front fork.

24 Where a frame is convertible for male and female riders by the removal of a bar, test it with the bar
25 removed.

26 Where a suspension fork is fitted, test the assembly with the fork extended to its unloaded free length.
27 Where a rear suspension system is incorporated in the frame, secure the suspension in a position
28 equivalent to that which would occur with an 80 kg rider seated on the bicycle. For young adult bicycles,
29 secure the suspension in a position equivalent to that which would occur with a 40 kg rider seated on the
30 bicycle; if the type of suspension system does not permit it to be locked, then replace the spring/damper
31 unit by a solid link of the appropriate size and with end fittings similar to those of the spring/damper
32 unit.

ISO/DIS 4210-6:2021(E)

33 **4.1.2 Test method**

34 Assemble a roller of mass less than or equal to 1 kg and with dimensions conforming to those shown in
 35 Figure 1 in the fork. The hardness of roller shall be not less than 60 HRC at impact surface. If a dummy
 36 fork is used in place of a fork, the bar shall have a rounded end equivalent in shape to the roller. Hold the
 37 frame-fork or frame-bar assembly vertically with clamping to a rigid fixture by the rear-axle attachment
 38 points as shown in Figure 1.

39 Rest a striker of mass 22,5 kg on the roller in the fork dropouts or on the rounded end of the dummy fork
 40 and measure the wheelbase. Raise the striker to a height of h_1 above the low-mass roller and release it to
 41 strike the roller or the steel bar at a point in line with the wheel centres and against the direction of the
 42 fork rake or rake of the bar. The drop heights are given in Table 1. The striker will bounce and this is
 43 normal. When the striker has come to rest on the roller or dummy fork, measure the wheelbase again.

44 If the fork fails, the frame shall be tested with a dummy fork.

45 NOTE See ISO 4210-3, Annex B.

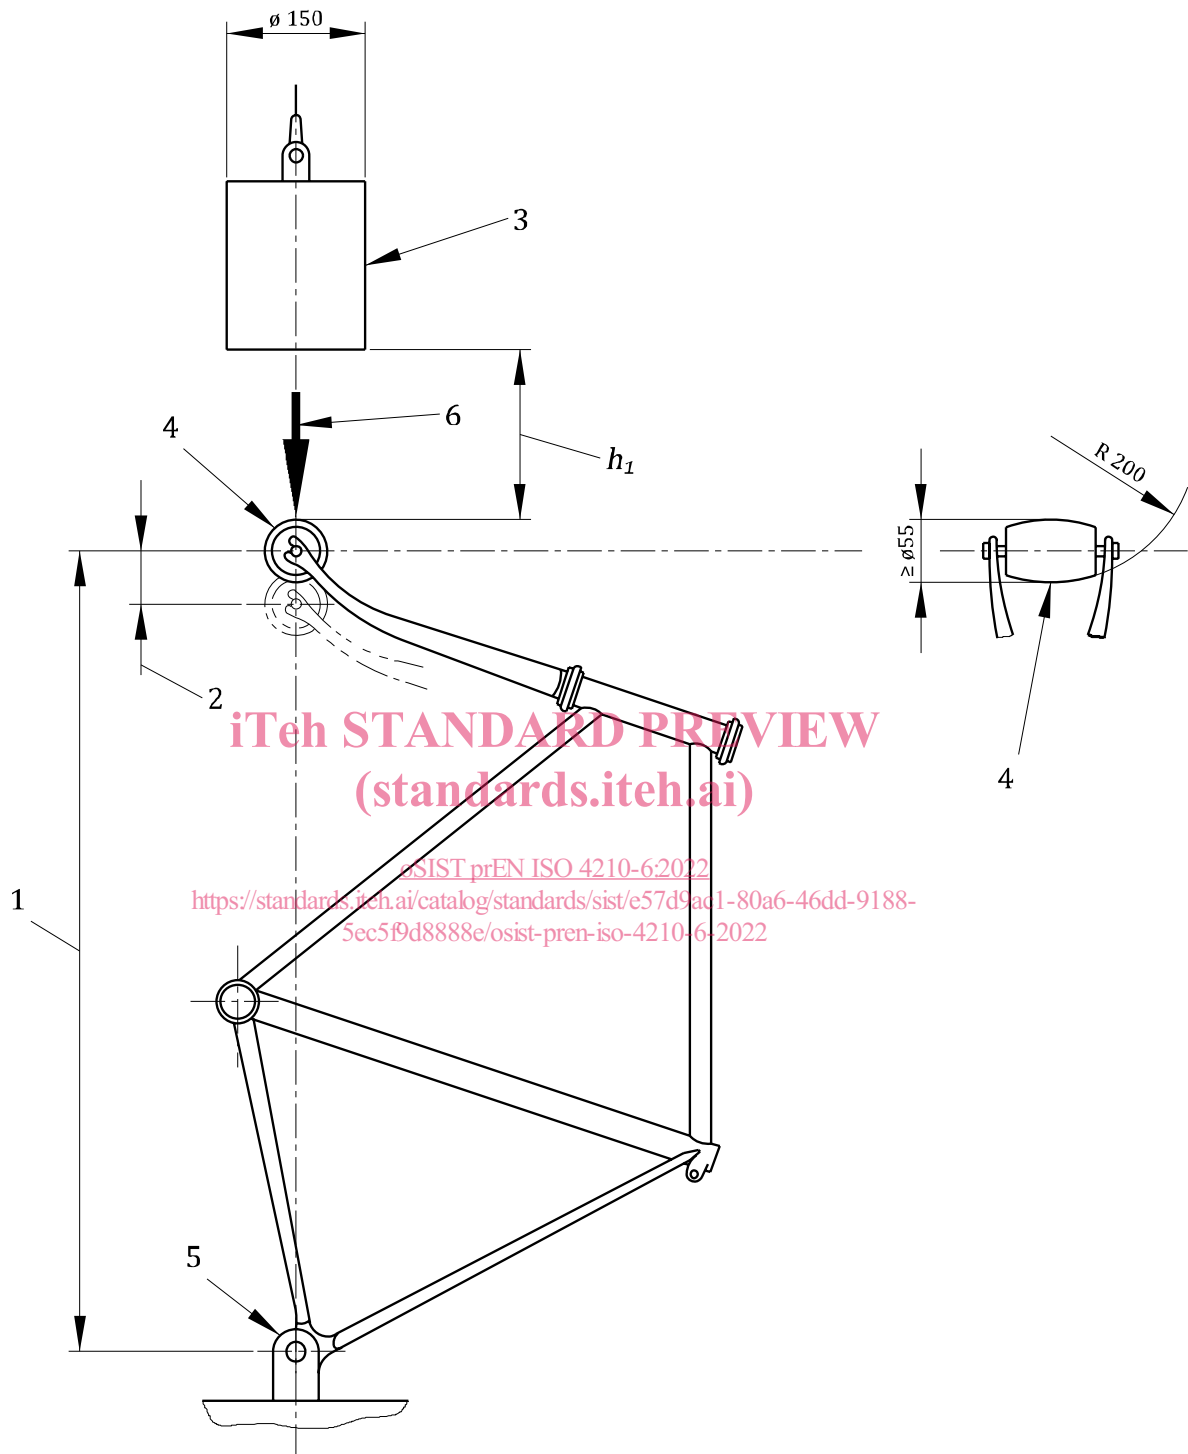
46 **Table 1 — Drop heights**

47 Dimensions in millimetres

Bicycle type	City and trekking bicycles	Young adult bicycles	Mountain bicycles	Racing bicycles
Drop height, h_1	180	180	360	212

iTeh STANDARD PREVIEW
 (standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/e57d9ac1-80a6-46dd-9188-5ec5f9d8888e/osist-pren-iso-4210-6-2022>

50 **Key**

- h_1 drop height
- 1 wheelbase
- 2 permanent deformation
- 3 22,5 kg striker
- 4 low-mass roller (1 kg max.)
- 5 rigid mounting for rear-axle attachment point
- 6 direction of rearward impact

Figure 1 — Frame and front fork assembly — Impact test (falling mass)

ISO/DIS 4210-6:2021(E)

4.2 Frame and front fork assembly — Impact test (falling frame)

4.2.1 General

Manufacturers of complete bicycles shall conduct the test with the frame fitted with the appropriate front fork.

For manufacturers of frames, where the fork intended for the frame is not available, the test can be conducted with the frame fitted with a fork which meets the requirements of the fork impact test as described in ISO 4210-2, 4.9.5.

Where a frame is convertible for male and female riders by the removal of a bar, test it with the bar removed.

Where a suspension fork is fitted, it shall be at its unloaded length prior to the impact. If the spring/damper unit can be locked, it shall be locked in its unloaded length position. If the spring/damper cannot be locked, use one of the two following alternative procedures:

- secure the fork at its extended length by an external locking method, or
- replace the fork by a rigid fork which is known to meet the requirements of the impact test described in ISO 4210-2, 4.9.5 and of a length which is consistent with an 80 kg (in case of young adult bicycles, apply 40 kg) rider seated in a normal riding position on the bicycle when it is equipped with the suspension fork.

Where a rear suspension system is incorporated in the frame, secure the spring/damper unit in a position equivalent to that which would occur with an 80 kg (in case of young adult bicycles, apply 40 kg) rider seated on the bicycle; if the type of suspension system does not permit it to be locked, then replace the spring/damper unit by a solid link of the appropriate size and with end fittings similar to those of the spring/damper unit.

4.2.2 Test method

Conduct the test on the assembly used for the test in ISO 4210-2, 4.8.2 or, in the case of a frame manufacturer who does not make forks, with the same frame with a suitable fork fitted (see 4.2.1).

As shown in Figure 2, mount the frame-fork assembly at its rear axle attachment points so that it is free to rotate about the rear axle in a vertical plane. Support the front fork on a flat steel anvil so that the frame is in its normal position of use. Securely fix mass M_1 to the seat-post as shown in Figure 2 with the centre of gravity at distance D ($= 75$ mm) along the seat-post axis from the insertion point, and fix masses of M_2 and M_3 (Table 2) to the top of the steering head and the bottom bracket, respectively, as shown in Figure 2.

Measure the wheelbase with the three masses in place. Rotate the assembly about the rear axle until the distance between the low-mass roller and the anvil is h_2 , then allow the assembly to fall freely to impact on the anvil.

Repeat the test and then measure the wheelbase again with the three masses in place and the roller resting on the anvil.