

ISO/IEC JTC 1/SC 31

Secretariat: ANSI

Voting begins on:
2021-06-01

Voting terminates on:
2021-07-27

Information technology — Automatic identification and data capture techniques — Han Xin Code bar code symbology specification

Technologies de l'information — Techniques d'identification et de capture de données automatiques — Spécification des symboles du code à barres de Han Xin

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/IEC FDIS 20830

<https://standards.iteh.ai/catalog/standards/sist/028ac5d0-10b0-4be3-a0d1-18fe6b0b6b7a/iso-iec-fdis-20830>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
ISO/IEC FDIS 20830:2021(E)

© ISO/IEC 2021

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEC FDIS 20830

<https://standards.iteh.ai/catalog/standards/sist/028ac5d0-10b0-4be3-a0d1-18fe6b0b6b7a/iso-iec-fdis-20830>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	vi
Introduction	vii
1 Scope	1
2 Normative references	1
3 Terms, definitions, and symbols	1
3.1 Terms and definitions	1
3.2 Mathematical and logical symbols	3
4 Symbology description	4
4.1 Symbology characteristics	4
4.1.1 Basic characteristics	4
4.1.2 Summary of additional features	5
4.2 Symbol structure	5
4.2.1 General	5
4.2.2 Symbol Versions and Sizes	6
4.2.3 Finder Pattern	8
4.2.4 Position Detection Pattern separator	10
4.2.5 Alignment Pattern	10
4.2.6 Assistant Alignment Pattern	13
4.2.7 Structural Information Region	13
4.2.8 Data Region	14
4.2.9 Quiet Zone	14
5 Requirements	15
5.1 Encode procedure overview	15
5.2 Data analysis	16
5.3 Mode	17
5.3.1 General	17
5.3.2 Numeric mode	19
5.3.3 Text mode	19
5.3.4 Binary byte mode	19
5.3.5 Common Chinese Characters in Region One mode	19
5.3.6 Common Chinese Characters in Region Two mode	20
5.3.7 GB18030 2-byte Region mode	20
5.3.8 GB18030 4-byte Region mode	20
5.3.9 Extended Channel Interpretation (ECI) mode	20
5.3.10 Unicode mode	20
5.3.11 GS1 mode	20
5.3.12 URI mode	21
5.4 Data encoding	21
5.4.1 General	21
5.4.2 Constructing the information bit stream	21
5.4.3 Constructing information codewords sequence	21
5.4.4 Numeric mode encoding	21
5.4.5 Text mode encoding	23
5.4.6 Binary mode encoding	24
5.4.7 Common Chinese Characters in Region One mode encoding	25
5.4.8 Common Chinese Characters in Region Two mode encoding	26
5.4.9 GB18030 2-byte Region mode encoding	27
5.4.10 GB18030 4-byte Region mode encoding	28
5.4.11 ECI mode encoding	29
5.4.12 Unicode mode	30
5.4.13 GS1 mode encoding	33
5.4.14 URI mode	36

5.4.15	Mixed modes encoding.....	41
5.5	Error detection and correction.....	42
5.5.1	General.....	42
5.5.2	Generating the error correction codewords.....	42
5.5.3	Error correction capacity.....	44
5.6	User considerations for encoding data in a Han Xin Code symbol.....	44
5.6.1	General.....	44
5.6.2	User selection of error correction level.....	44
5.6.3	User selection of mode.....	44
5.6.4	User selection of Extended Channel Interpretation.....	45
5.6.5	User selection of symbol size.....	45
5.7	Construction of final data bit stream.....	45
5.8	Symbol construction.....	45
5.8.1	General.....	45
5.8.2	Fixed Pattern placement.....	45
5.8.3	Data placement.....	46
5.8.4	Masking.....	48
5.8.5	Structural Information placement.....	49
6	Symbol dimensions.....	50
6.1	Dimensions.....	50
6.2	Quiet zone.....	50
7	User guidelines.....	50
7.1	Human readable interpretation.....	50
7.2	Autodiscrimination capability.....	51
7.3	Principle of Han Xin Code symbol printing and scanning.....	51
8	Symbol quality.....	51
8.1	General.....	51
8.2	Symbol quality parameters.....	51
8.2.1	General.....	51
8.2.2	Fixed Pattern damage.....	51
8.2.3	Symbol grade.....	51
8.2.4	Grid non-uniformity.....	51
8.3	Process control measurements.....	51
9	Decoding procedure overview.....	52
10	Reference decode algorithm for Han Xin Code.....	53
10.1	General.....	53
10.2	Image preprocessing.....	53
10.3	Locate Finder Pattern and determine the orientation.....	53
10.4	Structural Information decoding.....	55
10.5	Establish the sampling grid.....	56
10.6	Sampling.....	63
10.7	Masking releasing.....	63
10.8	Restore data codewords.....	64
10.9	Error correction decoding.....	64
10.10	Data codeword decoding.....	64
11	Transmitted data.....	64
11.1	General.....	64
11.2	Basic interpretation.....	64
11.3	Protocol for Extended Channel Interpretation.....	64
11.4	Protocol for GS1 data transmission.....	65
	Annex A (normative) Alignment Pattern parameters of symbol of different versions.....	66
	Annex B (normative) Data capacity and error correction characteristics of Han Xin Code.....	69
	Annex C (informative) Information capacity of Han Xin Code.....	84

Annex D (normative) Error correction codeword generator polynomials	93
Annex E (normative) Structural Information	95
Annex F (informative) Autodiscrimination compatibility	98
Annex G (informative) Error correction decoding algorithm	99
Annex H (informative) User guidance for Han Xin Code printing and scanning	101
Annex I (normative) Print quality of Han Xin Code — Symbology-specific aspects	103
Annex J (informative) Useful process control techniques	107
Annex K (informative) Han Xin Code encoding examples	108
Annex L (informative) Symbology identifier	129
Annex M (normative) Charsets of URI mode	130
Annex N (normative) Source codes for Unicode mode in C programming	137
Annex O (informative) Implement Source code for URI mode in C programming	161
Bibliography	196

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEC FDIS 20830

<https://standards.iteh.ai/catalog/standards/sist/028ac5d0-10b0-4be3-a0d1-18fe6b0b6b7a/iso-iec-fdis-20830>

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <http://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 31, *Automatic identification and data capture techniques*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Han Xin Code is a two-dimensional matrix symbology which is made up of an array of nominally square modules arranged in an overall square pattern, including a Finder Pattern located at four corners of the symbol that are intended to assist in easy locating of its position, size and inclination. Alignment Patterns and Assistant Alignment Patterns are also used in Versions 4 to 84 symbols. A wide range of size of symbols is provided together with four error correction levels. Module dimension is user-specified to produce symbols by a wide variety of techniques.

Manufacturers of bar code equipment and users of the technology require publicly available standard symbology specifications to which they can refer when developing equipment and application standards. This document is published to meet this request.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEC FDIS 20830

<https://standards.iteh.ai/catalog/standards/sist/028ac5d0-10b0-4be3-a0d1-18fe6b0b6b7a/iso-iec-fdis-20830>

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

ISO/IEC FDIS 20830

<https://standards.iteh.ai/catalog/standards/sist/028ac5d0-10b0-4be3-a0d1-18fe6b0b6b7a/iso-iec-fdis-20830>

Information technology — Automatic identification and data capture techniques — Han Xin Code bar code symbology specification

1 Scope

This document defines the requirements for the symbology known as Han Xin Code. It specifies the Han Xin Code symbology characteristics, data encoding process, symbol structure, dimensions and print quality requirements, error correction rules, reference decoding algorithm, and user-selectable application parameters.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 646, *Information technology — ISO 7-bit coded character set for information interchange*

ISO/IEC 15415:2011, *Information technology — Automatic identification and data capture techniques — Bar code symbol print quality test specification — Two-dimensional symbols*

ISO/IEC 15416, *Automatic identification and data capture techniques — Bar code print quality test specification — Linear symbols*

ISO/IEC 15424, *Information technology — Automatic identification and data capture techniques — Data Carrier Identifiers (including Symbology Identifiers)*

ISO/IEC 19762, *Information technology — Automatic identification and data capture (AIDC) techniques — Harmonized vocabulary*

GS1 General Specifications

3 Terms, definitions, and symbols

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 19762 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1.1

assistant alignment pattern

non-data pattern located in the perimeter of the Han Xin Code symbol and intended to provide additional reference points to synchronize modules for reading

3.1.2

data bit stream

binary sequence that comprises the *information bit stream* (3.1.9) and the *error correction bit stream* (3.1.4)

3.1.3

data codeword

codeword that is used to encode information codewords and error correction codewords.

3.1.4

error correction bit stream

binary sequence used to correct errors, made by error correction encoding from the *information bit stream* (3.1.9)

3.1.5

Unicode

international encoding standard for use with different languages and scripts, by which each letter, digit, or symbol applies across different platforms and programs.

Note 1 to entry: The repertoire of Unicode is synchronized with ISO/IEC 10646, and both are code-for-code identical.

3.1.6

GS1 mode

encoding *mode* (3.1.10) used for representing GS1 data in Han Xin Code

3.1.7

URI mode

encoding *mode* (3.1.11) used for representing uniform resource identifier (URI) described in RFC 3986 in Han Xin Code

3.1.8

Unicode mode

encoding *mode* (3.1.11) used for representing text data in *Unicode* (3.1.5) encoding/charset in Han Xin Code.

3.1.9

information bit stream

binary sequence made up of *mode* (3.1.11) encodings from the original input data

3.1.10

masking

XOR processing of the bit pattern in the information encoding region of the symbol with an algorithmically determined pattern to provide a symbol with more evenly balanced numbers of dark and light modules and to reduce the occurrence of patterns which would interfere with fast processing of the image

3.1.11

mode

method of representing a specific character set as a binary bit stream

3.1.12

mode indicator

bit sequence indicating in which *mode* (3.1.11) the following data sequence is encoded

3.1.13

mode terminator

bit sequence used to terminate the bit sequence representing an encoding *mode* (3.1.11)

3.1.14**padding bit**

bit "0", appended to the *information bit stream* (3.1.9) to meet the requirements of the error correction algorithm

3.1.15**position detection pattern**

one of the four pattern components of the Finder Pattern in Han Xin Code symbols

3.1.16**position detection center**

center of the 3×3 dark modules in the *position detection pattern* (3.1.15)

3.1.17**position detection pattern separator**

one-module wide non-data pattern, made up of all light modules, used to separate the *position detection pattern* (3.1.15) from the *structural information* (3.1.18) region

3.1.18**structural information**

bit stream of data used to record *version* (3.1.20), error correction level and *masking* (3.1.10) solution

3.1.19**symbol padding bit**

bit "0", not representing data, used to fill the empty positions of the symbol when the information encoding region cannot be fully filled with 8-bit codewords

3.1.20**version**

size of the symbol represented in terms of its position in the sequence of permissible sizes for Han Xin Code symbols, from 23×23 modules (Version 1) to 189×189 modules (Version 84)

3.2 Mathematical and logical symbols

d	number of error correction codewords
e	number of erasures
k	total number of information codewords
n	total number of data codewords
t	number of errors
X	horizontal width of a module
Y	vertical distance from the center line of modules in one row to the center line of modules in an adjacent row
$(\dots)_{\text{bin}}$	data in () is figured in binary system
\dots_{HEX}	data is figured in hexadecimal
$(\dots)_{\text{hex}}$	data in () is figured in hexadecimal

div	is the integer division operator
mod	is the integer remainder after division
XOR	is the exclusive-or logic function whose output is one only when its two inputs are not equivalent

NOTE Without any specific statement, a byte usually comprises 8 binary bits and the byte's contents are represented in hexadecimal.

4 Symbology description

4.1 Symbology characteristics

4.1.1 Basic characteristics

4.1.1.1 General

Han Xin Code is a two-dimensional matrix symbology with the following basic characteristics:

4.1.1.2 Encodable characters

- (1) Numeric characters (digits 0~9)
- (2) ASCII characters (refer to ISO/IEC 646)
- (3) Chinese characters (refer to GB18030)
- (4) Octet bytes such as graphic and audio information, etc.
- (5) GS1 data used in GS1 system
- (6) Uniform Resource Identifier (URI)
- (7) Any text data reference to a encoding/charset (such as Unicode, JIS, etc.)

4.1.1.3 Representation of data

A dark module is a binary one and a light module is a zero, However, dark module is zero and a light module is one for the reflectance reversal symbols. See 4.1.2 for details of reflectance reversal.

4.1.1.4 Symbol size in modules

23 modules × 23 modules to 189 modules × 189 modules (Version 1 to 84, increasing in steps of two modules per side).

4.1.1.5 Maximum data capacity

- (1) Numeric data: 7827 characters
- (2) ASCII characters: 4350 characters
- (3) Common Chinese Characters in Regions One and Two of GB18030: 2174 characters
- (4) 2-byte Chinese characters data: 1739 characters
- (5) 4-byte Chinese characters data: 1044 characters
- (6) Binary byte data: 3261 bytes

4.1.1.6 Selectable error correction

Four levels of Reed-Solomon error correction and their error correction abilities of symbol codewords are shown as follows:

L1	8 %
L2	15 %
L3	23 %
L4	30 %

4.1.2 Summary of additional features

The following are additional inherent and optional features of Han Xin Code:

- Masking: (Inherent) Masking pattern is used to the proportions of dark modules and light modules in the symbols and decrease the occurrences of images preventing fast processing.
- Reflectance reversal: (Inherent) Symbols are intended to be read when marked so that the image is either dark on light or light on dark (see [Figure 1](#)).
- Extended Channel Interpretations: (Optional) This mechanism enables characters from other character sets (e.g. Arabic, Cyrillic, Greek, Hebrew) and other data interpretations or industry-specific requirements to be represented.

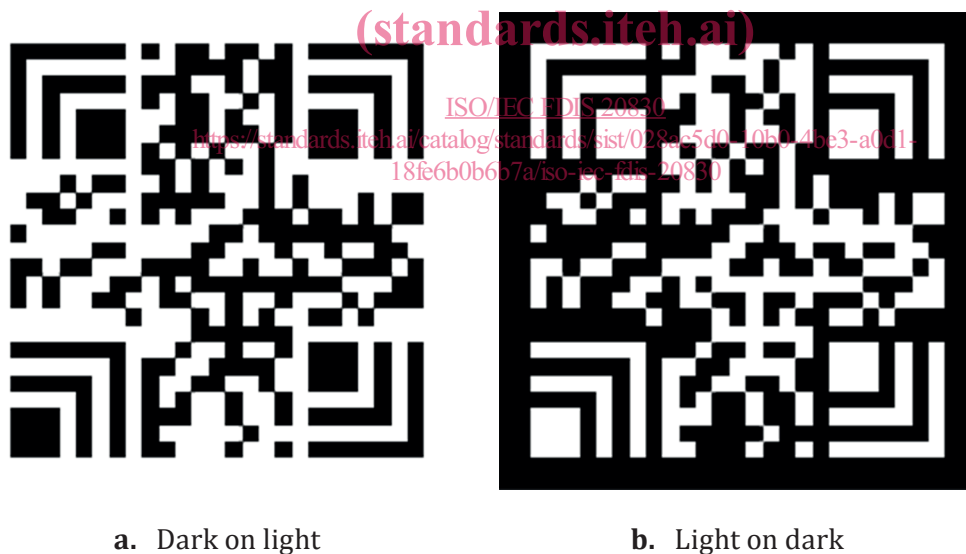


Figure 1 — Examples of Hanxin Code symbol encoding the text "Han Xin Code Symbol"

4.2 Symbol structure

4.2.1 General

Each Han Xin Code symbol shall be constructed of $n \times n$ nominally square modules set out in a regular square array and shall consist of an information encoding region, Structural Information regions and Fixed Pattern region. Fixed Pattern region include Finder Pattern, Position Detection Pattern separators, Alignment Pattern and Assistant Alignment Patterns. The symbol shall be surrounded by a quiet zone. [Figure 2](#) illustrates a Version 24 Han Xin Code symbol. [Figure 3](#) illustrates the structure of a Version 24 symbol.



Figure 2 — Han Xin Code symbol (Version 24)



Figure 3 — Structure of a Version 24 Han Xin Code symbol

4.2.2 Symbol Versions and Sizes

There are eighty-four sizes of Han Xin Code symbol referred to as Version 1, Version 2 ... Version 84 respectively. Version 1 measures 23 modules \times 23 modules, Version 2 measures 25 modules \times 25 modules and so on, increasing in steps of 2 modules per side up to Version 84 which measures 189 modules \times 189 modules. [Figure 4](#) to [Figure 9](#) illustrate the symbols of Versions 1, 4, 24, 40, 62 and 84.



Figure 4 — Version 1 symbol



Figure 5 — Version 4 symbol



Figure 6 — Version 24 symbol



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/IEC FDIS 20830
https://standards.iteh.ai/catalog/standards/sist/84018401-4be3-a0d1-18fe6b0b6b7a/iso-iec-fdis-20830

Figure 7 — Version 40 symbol

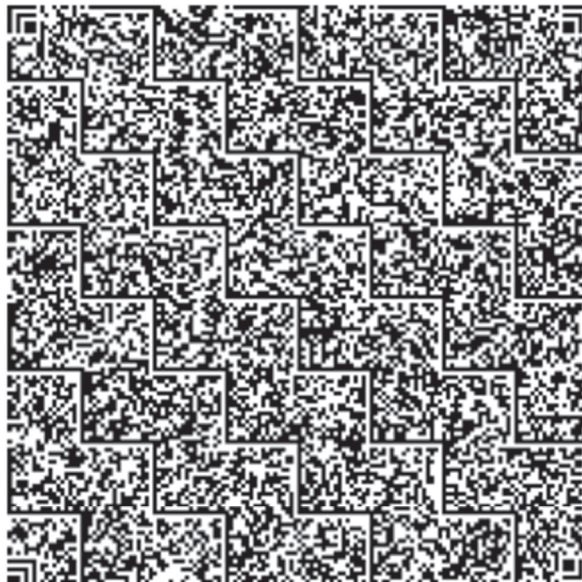


Figure 8 — Version 62 symbol