
**Information technology — Generic coding
of moving pictures and associated audio
information —**

**Part 1:
Systems**

**AMENDMENT 3: Carriage of green
metadata in MPEG2 systems**

ISO/IEC 13818-1:2015/Amd.3:2016
*Technologies de l'information — Codage générique des images
animées et du son associé —*
Partie 1: Systèmes

*AMENDEMENT 3: Transport des métadonnées vertes dans les
systèmes MPEG2*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/IEC 13818-1:2015/Amd 3:2016
<https://standards.iteh.ai/catalog/standards/sist/eb8e7120-b9df-492c-b7b2-8361fd2cdb96/iso-iec-13818-1-2015-amd-3-2016>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2016

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 401 • CH-1214 Vernier, Geneva
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Amendment 3 to ISO/IEC 13818-1:2015 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*, in collaboration with ITU-T. The identical text is published as ITU-T H.222.0 (12/2015).

(standards.iteh.ai)

[ISO/IEC 13818-1:2015/Amd 3:2016](https://standards.iteh.ai/catalog/standards/sist/eb8e7120-b9df-492c-b7b2-8361fd2cdb96/iso-iec-13818-1-2015-amd-3-2016)

<https://standards.iteh.ai/catalog/standards/sist/eb8e7120-b9df-492c-b7b2-8361fd2cdb96/iso-iec-13818-1-2015-amd-3-2016>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 13818-1:2015/Amd 3:2016](https://standards.iteh.ai/catalog/standards/sist/eb8e7120-b9df-492c-b7b2-8361fd2cdb96/iso-iec-13818-1-2015-amd-3-2016)

<https://standards.iteh.ai/catalog/standards/sist/eb8e7120-b9df-492c-b7b2-8361fd2cdb96/iso-iec-13818-1-2015-amd-3-2016>

INTERNATIONAL STANDARD
ITU-T RECOMMENDATIONInformation technology – Generic coding of moving pictures and
associated audio information: Systems

Amendment 3

Carriage of green metadata in MPEG-2 systems

1) Clause 1.2.3

In clause 1.2.3 add

- ISO/IEC 23001-11:2015, *Information technology – MPEG systems technologies – Part 11: Energy-efficient media consumption (Green Metadata)*.

2) Clause 2.1.128

Add the following clause after clause 2.1.127

2.1.128 Green access unit – An access unit that contains dynamic metadata as defined in clause 6.2.1 of ISO/IEC 23001-11.

Table 2-31

Replace Table 2-31 with the following

STANDARD PREVIEW
(standards.iteh.ai)

Table 2-31 – Table_id assignment values

Value	Description
0x00	program association section
0x01	conditional_access_section (CA_section)
0x02	TS_program_map_section
0x03	TS_description_section
0x04	ISO_IEC_14496_scene_description_section
0x05	ISO_IEC_14496_object_descriptor_section
0x06	Metadata_section
0x07	IPMP_Control_Information_section (defined in ISO/IEC 13818-11)
0x08	ISO_IEC_14496_section
0x09	Green access unit (ISO/IEC 23001-11) section
0x0A-0x37	Rec. ITU-T H.222.0 ISO/IEC 13818-1 reserved
0x38-0x3F	Defined in ISO/IEC 13818-6
0x40-0xFE	User private
0xFF	Forbidden

Replace Table 2-106 with:

Table 2-106 – Extension descriptor tag values

Extension_descriptor_tag	TS	PS	Identification
0	n/a	n/a	Reserved
1	n/a	X	Forbidden
2	X	X	ODUpdate_descriptor
3	X	n/a	HEVC_timing_and_HRD_descriptor()
4	X	n/a	af_extensions_descriptor()
5	X	n/a	HEVC_operation_point_descriptor()
6	X	n/a	hierarchy_extension_descriptor()
7	X	n/a	Green_extension_descriptor()
8-255	n/a	n/a	Rec. ITU-T H.222.0 ISO/IEC 13818-1 Reserved

5) Clause 2.6.103

Add the following clauses after 2.6.103

2.6.104 Green extension descriptor

The syntax of the green extension descriptor containing static metadata is shown in Table 2-111quinquies.

Table 2-111quinquies – Green extension descriptor

Syntax	No. bits	Mnemonic
Green_extension_descriptor() {		
descriptor_tag	8	uimsbf
num_constant_backlight_voltage_time_intervals	2	uimsbf
reserved	6	bslbf
for (i=0; i < num_constant_backlight_voltage_time_intervals; i++) {		
constant_backlight_voltage_time_interval[i]	16	uimsbf
}	2	uimsbf
num_max_variations		
reserved	6	bslbf
for (j=0; j < num_max_variations; j++) {		
max_variation[j]	16	uimsbf
}		
}		

2.6.105 Semantics for green extension descriptor

Semantics for all the syntax elements above are specified in clause 6.4 of ISO/IEC 23001-11.

6) Clause 2.18

Add the following clauses after clause 2.18:

2.18 Carriage of green access units

2.18.1 Carriage of green access units in MPEG-2 sections

Green access units are carried using the MPEG-2 private section syntax with the section_syntax_indicator element set to '0'.

Table 2-111*sexies* – Green access unit section syntax

Syntax	Bits	Mnemonic / description
Green_access_unit_section_message(){		
table_ID	8	uimsbf
section_syntax_indicator	1	bslbf
private_indicator	1	bslbf
reserved	2	bslbf
private_section_length	12	uimsbf
'00100	4	bslbf
Display_in_PTS [32..30]	3	bslbf
marker_bit	1	bslbf
Display_in_PTS [29..15]	15	bslbf
marker_bit	1	bslbf
Display_in_PTS [14..0]	15	bslbf
marker_bit	1	bslbf
Green_Au()		
CRC_32	32	rpchof
}		
}		

2.18.2 Semantics of green access unit section

table_id – This shall be set to 0x09.

section_syntax_indicator – This shall be set to '0'.

Display_in_PTS – This is the 33-bit PTS specified similar to that defined in the PES header and is used with the associated video access unit.

Green_Au() – Defined in 2.18.3.

2.18.3 Green access unit

The format of the green access unit is defined in Table 2-111*septies*. Green access units contain dynamic metadata and are carried in MPEG private section format.

Table 2-111*septies* – Green access unit

Syntax	No. bits	Mnemonic
Green_Au {		
num_quality_levels	4	uimsbf
reserved	4	bslbf
for (k=0; k < num_constant_backlight_voltage_time_intervals; k++) {		
for (j=0; j < num_max_variations; j++) {		
lower_bound	8	uimsbf
if (lower_bound > 0)		
upper_bound	8	uimsbf
rgb_component_for_infinite_psnr	8	uimsbf
for (i=1; i <= num_quality_levels; i++){		
max_rgb_component	8	uimsbf
scaled_psnr_rgb	8	uimsbf
}		
}		
}		
}		

As explained in clause 6.4 of ISO/IEC 23001-11, each combination of constant_backlight_voltage_time_interval and max_variation is associated with contrast-enhancement metadata and a set of quality levels defined in Table 2-111*septies*.

The metadata in the Green_AU is applicable to the presentation subsystem until the next Green_AU containing metadata arrives.

Semantics for all the elements in Table 2-111 *septies* is defined in clause 6.4 of ISO/IEC 23001-11.

2.18.4 Timing relationship between green access unit and media access unit

The green access unit should be decoded and information should be available before the associated media access unit is decoded. Such a timing relationship guarantees that the metadata within the green access unit is made available to the display with sufficient lead time relative to the PTS of the associated media access unit. Note that the PTS of the media access unit and the PTS of the green access unit are identical. The green access unit is transmitted in the transport stream with a sufficient lead time so that the display control settings can be adjusted in advance of presentation time for correct operation. If $\text{num_constant_backlight_voltage_time_intervals} > 1$, then the lead time should be equal to or larger than the largest $\text{constant_backlight_voltage_time_interval}$. The PMT shall not contain more than one green metadata component (stream_type equal to 0x2C).

NOTE – Applications that use carouseling of green access unit data carouseling in a given program can do so as long as the display_in_PTS value is adjusted to conform to the PCR clock and T-STD buffer.

2.18.5 Buffer model for processing green access units

The buffer model reflects the processing required to handle green access units. The model can be used to establish constraints which can be used to verify the validity of dynamic green metadata prepared in accordance with this standard.

Figure 2-21 illustrates the buffer model for processing green access units.

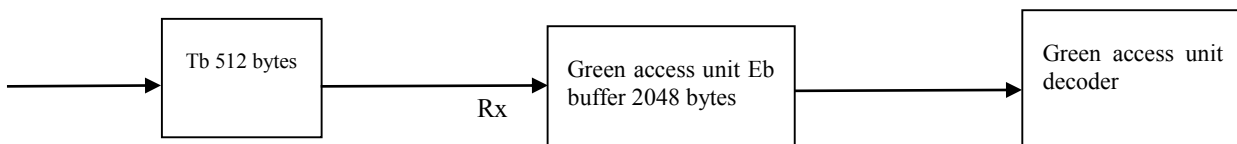


Figure 2-21 – Green access unit decoder processing model

MPEG-2 transport stream packets come into the model at the left, and are filtered by PID. Packets whose PID matches the green access unit PID flow into the 512 byte transport buffer. These buffered packets are removed at a rate of $R_x = 300$ kbps (kilobits/second) and stored in the green access unit Eb buffer (2048 Bytes). Green access unit table sections are removed from the Eb buffer immediately after the full access unit is available (based on section length) and these are passed onto the green access unit decoder at a rate $R_{bx} = 300$ kbps for decoding and each decoded access unit is associated with the video at $\text{time} = \text{display_in_PTS}$. The Eb buffer shall not overflow and the green access unit section shall be available in the Eb buffer at least 100 ms before display_in_PTS .

NOTE – In the worst-case, a green AU would contain 4488 bits. Under such conditions, the Eb buffer is large enough to hold up to three green AUs and the rate R_x is high enough to allow the removal of green AUs that are associated with video frames at 60 fps.