
**Safety of machinery — Safety distances
to prevent hazard zones being reached
by upper and lower limbs**

*Sécurité des machines — Distances de sécurité empêchant les
membres supérieurs et inférieurs d'atteindre les zones dangereuses*

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 13857:2019](https://standards.iteh.ai/catalog/standards/iso/ef653488-7937-4d83-8842-5dd565476ab7/iso-13857-2019)

<https://standards.iteh.ai/catalog/standards/iso/ef653488-7937-4d83-8842-5dd565476ab7/iso-13857-2019>



iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 13857:2019](https://standards.iteh.ai/catalog/standards/iso/ef653488-7937-4d83-8842-5dd565476ab7/iso-13857-2019)

<https://standards.iteh.ai/catalog/standards/iso/ef653488-7937-4d83-8842-5dd565476ab7/iso-13857-2019>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Safety distances to prevent reach or access by upper and lower limbs	2
4.1 General.....	2
4.1.1 Assumptions.....	2
4.1.2 Risk assessment.....	2
4.2 Safety distances to prevent access by upper limbs.....	3
4.2.1 Reaching upwards.....	3
4.2.2 Reaching over protective structures.....	4
4.2.3 Reaching around.....	6
4.2.4 Reaching through openings.....	8
4.2.5 Effect of additional protective structures on safety distances.....	10
4.3 Safety distances to prevent access by lower limbs.....	11
4.4 Consideration of whole body access.....	13
Annex A (informative) Use of Tables 1 and 2 with intermediate values	14
Annex B (informative) Distances to impede free access by lower limbs	18
Bibliography	20

iTech Standards
[\(https://standards.iteh.ai/\)](https://standards.iteh.ai/)
 Document Preview

[ISO 13857:2019](https://standards.iteh.ai/catalog/standards/iso/ef653488-7937-4d83-8842-5dd565476ab7/iso-13857-2019)

<https://standards.iteh.ai/catalog/standards/iso/ef653488-7937-4d83-8842-5dd565476ab7/iso-13857-2019>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 199, *Safety of machinery*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

This second edition cancels and replaces the first edition (ISO 13857:2008) which has been technically revised. The main change compared to the previous edition is that the document has been made more readable and more in line with ISO 12100:2010.

Introduction

The structure of safety standards in the field of machinery is as follows:

- a) **type-A standards** (basic safety standards) giving basic concepts, principles for design, and general aspects that can be applied to all machinery;
- b) **type-B standards** (generic safety standards) dealing with one safety aspect or one or more type(s) of safeguard that can be used across a wide range of machinery:
 - type-B1 standards on particular safety aspects (e.g. safety distances, surface temperature, noise);
 - type-B2 standards on safeguards (e.g. two-hand controls, interlocking devices, pressure sensitive devices, guards).
- c) **type-C standards** (machine safety standards) dealing with detailed safety requirements for a particular machine or group of machines.

This document is a type-B1 standard as stated in ISO 12100:2010.

This document is of relevance, in particular, for the following stakeholder groups representing the market players with regard to machinery safety:

- machine manufacturers (small, medium and large enterprises);
- health and safety bodies (regulators, accident prevention organisations, market surveillance etc.);

Others can be affected by the level of machinery safety achieved with the means of the document by the above-mentioned stakeholder groups:

- machine users/employers (small, medium and large enterprises);
- machine users/employees (e.g. trade unions, organizations for people with special needs);
- service providers, e. g. for maintenance (small, medium and large enterprises);
- consumers (in case of machinery intended for use by consumers).

The above-mentioned stakeholder groups have been given the possibility to participate at the drafting process of this document.

In addition, this document is intended for standardization bodies elaborating type-C standards.

The requirements of this document can be supplemented or modified by a type-C standard.

For machines which are covered by the scope of a type-C standard and which have been designed and built according to the requirements of that standard, the requirements of that type-C standard take precedence.

One method of eliminating or reducing risks caused by machinery is to make use of safety distances preventing hazard zones from being reached by the upper and lower limbs.

In specifying safety distances, a number of aspects need to be taken into consideration, such as:

- reach situations occurring when machinery is being used;
- reliable surveys of anthropometric data, taking into account population groups likely to be found in the countries concerned;
- biomechanical factors, such as compression and stretching of parts of the body and limits of joint rotation;
- technical and practical aspects; and

- additional measures for particular groups of persons (e.g. persons with special needs), which can be required due to a deviation from the specified body dimensions.

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[ISO 13857:2019](https://standards.itih.ai/catalog/standards/iso/ef653488-7937-4d83-8842-5dd565476ab7/iso-13857-2019)

<https://standards.itih.ai/catalog/standards/iso/ef653488-7937-4d83-8842-5dd565476ab7/iso-13857-2019>

Safety of machinery — Safety distances to prevent hazard zones being reached by upper and lower limbs

1 Scope

This document establishes values for safety distances in both industrial and non-industrial environments to prevent machinery hazard zones being reached. The safety distances are appropriate for protective structures. It also gives information about distances to impede free access by the lower limbs (see [Annex B](#)).

This document covers people of 14 years and older (the 5th percentile stature of 14-year-olds is approximately 1 400 mm). In addition, for upper limbs only, it provides information for children older than 3 years (5th percentile stature of 3-year-olds is approximately 900 mm) where reaching through openings needs to be addressed.

NOTE 1 It is not practical to specify safety distances for all persons. Therefore, the values presented are intended to cover the 95th percentile of the population.

Data for preventing lower limb access for children is not considered.

The distances apply when sufficient risk reduction can be achieved by distance alone. Because safety distances depend on size, some people of extreme dimensions will still be able to reach hazard zones even when the requirements of this document are met.

Compliance with the requirements in this document will prevent access to the hazard zone. Nevertheless the user of this document is advised that it does not provide the required risk reduction for every hazard (e.g. hazards related to machine emissions such as ionizing radiation, heat sources, noise, dust).

The clauses covering lower limbs apply on their own only when access by the upper limbs to the same hazard zone is not foreseeable according to the risk assessment.

The safety distances are intended to protect those persons trying to reach hazard zones under the conditions specified (see [4.1.1](#)).

NOTE 2 This document is not intended to provide measures against reaching a hazard zone by climbing over (see ISO 14120:2015, 5.18).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 12100:2010, *Safety of machinery — General principles for design — Risk assessment and risk reduction*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 12100:2010 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

**3.1
protective structure**

safeguard (e.g. a guard, an impeding device) or other physical obstruction (e.g. a part of a machine) which restricts the movement of the body and/or a part of it in order to prevent reaching hazard zones

**3.2
reference plane**

level at which persons would normally stand during the use of the machine or access to the hazard zone

Note 1 to entry: The reference plane is not necessarily the ground or the floor (for example a working platform can be the reference plane).

**3.3
safety distance**

safe separation distance

s_r
minimum distance a protective structure is required to be placed from a hazard zone

4 Safety distances to prevent reach or access by upper and lower limbs

4.1 General

4.1.1 Assumptions

The safety distances in this document have been derived by making the following assumptions:

- the protective structures and any openings in them retain their shape and position;
- safety distances are measured from the surface restricting the body or the relevant part of the body;
- the body is forced over protective structures or through openings in an attempt to reach the hazard zone;
- there is some contact with the reference plane while wearing shoes (use of high-soled shoes, climbing and jumping are not included);
- no aids such as chairs or ladders are used to change the reference plane;
- no aids such as rods or tools are used to extend the natural reach of the upper limbs.

4.1.2 Risk assessment

4.1.2.1 General

Safety distances are determined if the hazard to be considered has been identified as significant (see ISO 12100:2010, 3.8). All reasonably foreseeable access means shall be taken into account. When the possibility of access or the variety of hazard zones requires the application of more than one table, all safety distances shall be taken into account. When more than one safety distance is determined for the same means of access, the greatest safety distance shall be applied.

The safety distances, s_r , given in [Table 7](#) apply to persons reaching through openings using the lower limbs in an attempt to reach a hazard zone.

4.1.2.2 Selection of safety distances when reaching upwards and reaching over

Prior to selecting a suitable safety distance in case of reaching upwards (see [4.2.1](#)) or reaching over protective structures (see [4.2.2](#)), it is necessary to consider the severity of harm and the probability of occurrence of this harm caused by the hazard.

In case of reaching upwards, the higher value according to 4.2.1.2 shall be applied. In the case of reaching over protective structures, the values of Table 2 shall be applied.

The lower value according to 4.2.1.2 or Table 1 may only be applied where both the severity of harm and the probability of occurrence of harm caused by the hazard are low (see ISO 12100:2010, 5.5.2.3).

The probability of occurrence of harm can be assumed low with, for example, slow movements which allow escape from the hazardous movement.

The severity of the harm can be assumed low in the following examples:

- when temperature and contact duration with hot surfaces is below the burn threshold value (for burn threshold values, see ISO 13732-1);
- for hazards which do not cause permanent harm or irreversible damages to the body, for example such as haematomas, slight contusions or breaking of parts of the body which grow again, like finger nails.

More guidance on risk estimation is given in ISO/TR 14121-2:2012, Clause 6.

4.2 Safety distances to prevent access by upper limbs

4.2.1 Reaching upwards


4.2.1.1 General

Figure 1 shows the safety distance for reaching upwards.

4.2.1.2 Height of the hazard zone

The height of the hazard zone, h , shall be 2 700 mm or more.

The height of the hazard zone, h , shall be 2 500 mm or more where both the severity of harm and the probability of occurrence of harm caused by the hazard are low.

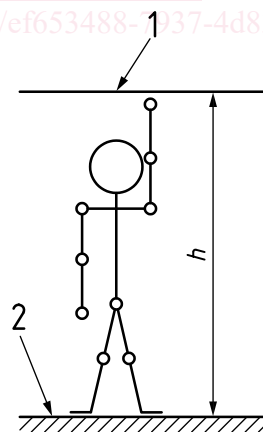

Key


- 1 hazard zone
- 2 reference plane
- h height of hazard zone

Figure 1 — Reaching upwards

4.2.2 Reaching over protective structures

4.2.2.1 General

Figure 2 shows reaching over a protective structure.

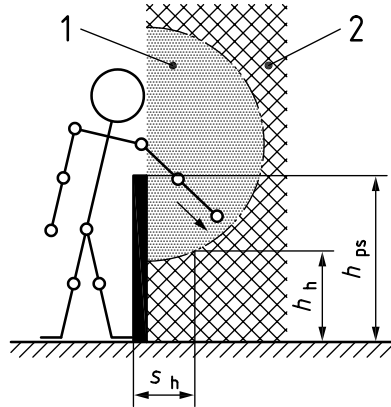

Key

- 1 area of upper limb reach
- 2 area outside of upper limb reach (hazard zone)
- h_h height of the point of the hazard zone which is nearest to the area of upper limb reach
- h_{ps} height of protective structure
- s_h horizontal safety distance of the point of the hazard zone which is nearest to the area of upper limb reach

Figure 2 — Reaching over protective structure

The values given in Tables 1 and 2 shall be used to determine the corresponding dimension(s) of the height of the hazard zone, the height of protective structures and the horizontal safety distance to the hazard zone.

When the known values of h_h , h_{ps} or s_h are between two values, the greater safety distance or higher protective structure or change in the height (higher or lower) of the hazard zone shall be used. Consequently, there shall be no interpolation of the values given.

4.2.2.2 Values

Table 1 may be used when the injury severity is slight and there is a low probability of occurrence of the injury. Table 1 provides the relationship between the height of the hazard zone, the height of the protective structure and the horizontal safety distance (see Figure 2).

NOTE Annex A gives examples of the use of Table 1.