

---

---

**Safety devices for protection against  
excessive pressure —**

**Part 3:  
Safety valves and bursting disc safety  
devices in combination**

**iTeh STANDARD PREVIEW**  
*Dispositifs de sécurité pour protection contre les pressions  
excessives —*  
**(standards.iteh.ai)**

*Partie 3: Soupapes de sûreté et dispositifs de sûreté à disque de  
rupture en combinaison*

ISO 4126-3:2020

<https://standards.iteh.ai/catalog/standards/sist/585b8903-5cad-4007-ab45-79d1bd82768a/iso-4126-3-2020>



## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 4126-3:2020

<https://standards.iteh.ai/catalog/standards/sist/585b8903-5cad-4007-ab45-79d1bd82768a/iso-4126-3-2020>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword.....	iv
Introduction.....	v
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references.....</b>	<b>1</b>
<b>3 Terms and definitions.....</b>	<b>1</b>
<b>4 Symbols.....</b>	<b>4</b>
<b>5 Design of combination.....</b>	<b>4</b>
<b>6 Installation of combination.....</b>	<b>5</b>
<b>7 Combination performance.....</b>	<b>5</b>
<b>8 Determination of combination discharge capacity factor, <math>F_d</math>, by testing.....</b>	<b>6</b>
8.1 General.....	6
8.2 Test requirements.....	6
8.3 Test rig.....	6
8.4 Test method.....	7
8.5 Test procedure.....	7
8.6 Acceptance criteria of the tests.....	7
8.6.1 General.....	7
8.6.2 Conditions applicable to the safety valve.....	8
8.6.3 Conditions applicable to the bursting disc safety device.....	8
8.6.4 Conditions applicable to combination.....	8
<b>9 Derivation of combination discharge capacity factor, <math>F_d</math>.....</b>	<b>9</b>
<b>10 Alternative to testing for <math>F_d</math>.....</b>	<b>9</b>
<b>11 Certification of combination discharge capacity factor, <math>F_d</math>.....</b>	<b>9</b>
<b>12 Application and use of the certified combination discharge capacity factor, <math>F_d</math>.....</b>	<b>9</b>
<b>13 Marking and identification of combination devices.....</b>	<b>9</b>
13.1 Bursting disc safety device.....	9
13.2 Safety valve.....	10
13.3 Combination.....	10
<b>14 Documentation.....</b>	<b>10</b>
<b>15 Preparation for storage and transport.....</b>	<b>11</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 185, *Safety devices for protection against excessive pressure*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 69, *Industrial valves*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 4126-3:2006), which has been technically revised.

The main changes compared to the previous edition are as follows:

- Eliminated unnecessary references and definitions throughout the document.
- [Clause 5](#): Inlet line and pressure drop requirements from prior 6.2 were moved to [Clause 5](#) and a reference to ISO 4126-9 was also added.
- [Clause 7](#): Deleted specific references to specific EN standards to refer to the applicable pressure vessel standard to reflect the global nature of this document.
- [Clause 9](#): The restrictions for  $F_d$  values less than 0,97 were eliminated.
- [Clause 12](#): Clarified the applicable minimum bursting pressure for which the  $F_d$  value can be used for sizes larger than those flow tested.
- [Clause 14](#): Added a requirement for the supplier to provide a test certificate if the  $F_d$  being used is a certified combination discharge coefficient.

A list of all parts in the ISO 4126 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

Bursting disc safety devices can be used upstream of safety valves in the following cases:

- a) to protect the safety valve against corrosion, fouling or operating conditions which could affect the safety valve performance;
- b) to prevent leakage;
- c) to prevent total loss of contents from the protected equipment following the bursting of the bursting disc.

The term *combination* is used to describe the close-coupled (i.e. within 5 pipe diameters) assembly of a bursting disc safety device upstream of a safety valve or controlled safety pressure relief systems (CSPRS), as defined by this document. Requirements for other installation arrangements of bursting discs with safety valves or CSPRS are defined in ISO 4126-9.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 4126-3:2020

<https://standards.iteh.ai/catalog/standards/sist/585b8903-5cad-4007-ab45-79d1bd82768a/iso-4126-3-2020>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 4126-3:2020

<https://standards.iteh.ai/catalog/standards/sist/585b8903-5cad-4007-ab45-79d1bd82768a/iso-4126-3-2020>

# Safety devices for protection against excessive pressure —

## Part 3: Safety valves and bursting disc safety devices in combination

### 1 Scope

This document specifies only the requirements for a product assembled from the in-series combination of safety valves or CSPRS (controlled safety pressure relief systems) according to ISO 4126-1, ISO 4126-4 and ISO 4126-5, and bursting disc safety devices, according to ISO 4126-2, installed upstream of the valve within five pipe diameters of the valve inlet. It specifies the design, application and marking requirements for such products, composed of the bursting disc safety device, a safety valve or CSPRS and, where applicable, a connecting pipe or spool piece. In addition, it gives a method for establishing the combination discharge factor used in sizing combinations.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4126-1:2013, *Safety devices for protection against excessive pressure — Part 1: Safety valves*

ISO 4126-2:2018, *Safety devices for protection against excessive pressure — Part 2: Bursting disc safety devices*

ISO 4126-4:2013, *Safety devices for protection against excessive pressure — Part 4: Pilot operated safety valves*

ISO 4126-5:2013, *Safety devices for protection against excessive pressure — Part 5: Controlled safety pressure relief systems (CSPRS)*

ISO 4126-6:2014, *Safety devices for protection against excessive pressure — Part 6: Application, selection and installation of bursting disc safety devices*

ISO 4126-9:2008, *Safety devices for protection against excessive pressure — Part 9: Application and installation of safety devices excluding stand-alone bursting disc safety devices*

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.


ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

**3.1 combination**

installation which comprises a *bursting disc safety device* (3.3) installed within five pipe diameters (from outlet of *bursting disc holder* (3.6) to inlet of valve) before the inlet of a safety valve or a CSPRS

Note 1 to entry: See [Figure 1](#).

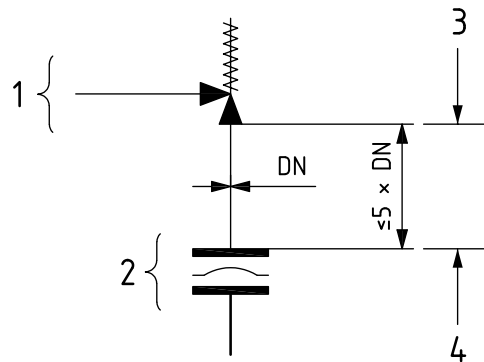

**Key**

- 1 safety valve or CSPRS
- 2 bursting disc safety device
- 3 safety valve or CSPRS inlet
- 4 bursting disc safety device outlet

NOTE Other bursting disc safety device configurations used in conjunction with safety valves or CSPRS are specified in ISO 4126-6.

iTech STANDARD PREVIEW  
(standards.itech.ai)

**Figure 1 — Diagram of combination showing relative distance**

<https://standards.itech.ai/catalog/standards/sist/585b8903-5cad-4007-ab45-79d1bd82768a/iso-4126-3-2020>

**3.2 combination discharge capacity factor**

$F_d$   
factor used to determine the discharge capacity of a safety valve or CSPRS when the safety valve or CSPRS is used in combination with a *bursting disc safety device* (3.3) installed upstream of the safety valve or CSPRS

**3.3 bursting disc safety device**

non-reclosing pressure relief device actuated by differential pressure and designed to function by the bursting of the *bursting disc(s)* (3.5)

Note 1 to entry: It is the complete assembly of installed components including, where appropriate, the *bursting disc holder* (3.6).

**3.4 bursting disc assembly**

complete assembly of the components installed in the *bursting disc holder* (3.6) to perform the desired function

**3.5 bursting disc**

pressure-sensitive component(s) of a *bursting disc safety device* (3.3) designed to open by bursting at a *specified bursting pressure* (3.7)

**3.6 bursting disc holder**

part of a *bursting disc safety device* (3.3) which retains the *bursting disc assembly* (3.4) in position



**3.7****specified bursting pressure**

*bursting pressure* (3.13) quoted with a coincident temperature when defining the *bursting disc* (3.5) requirements

Note 1 to entry: It is used in conjunction with a *performance tolerance* (3.10).

**3.8****specified maximum bursting pressure**

maximum *bursting pressure* (3.13) quoted with the coincident temperature when defining the *bursting disc* (3.5) requirements

Note 1 to entry: It is used in conjunction with a *specified minimum bursting pressure* (3.9).

**3.9****specified minimum bursting pressure**

minimum *bursting pressure* (3.13) quoted with the coincident temperature when defining the *bursting disc* (3.5) requirements

Note 1 to entry: It is used in conjunction with a *specified maximum bursting pressure* (3.8).

**3.10****performance tolerance**

range of pressure between the *specified minimum bursting pressure* (3.9) and the *specified maximum bursting pressure* (3.8) or the range of pressure in positive and negative percentages or quantities which is related to the *specified bursting pressure* (3.7)

**3.11****relieving pressure**

maximum pressure under discharge conditions in the pressurised system

Note 1 to entry: It may differ from the *bursting pressure of the bursting disc* (3.5).

**3.12****batch**

quantity of *bursting discs* or *bursting disc safety devices* (3.3) made as a single group of the same type, size, materials and *specified bursting pressure* (3.7) requirements, and where the *bursting discs* (3.5) are manufactured from the same lot of material

**3.13****bursting pressure**

value of the differential pressure between the upstream side and the downstream side of the *bursting disc* (3.5) when it bursts

**3.14****pressure relief system**

system intended for the safe relief of fluids from pressure equipment for prevention of excessive pressure

Note 1 to entry: It can consist of equipment nozzle, inlet piping, pressure relief device(s) and discharge piping to atmosphere/collecting vessel/header.

**3.15****certified derated coefficient of discharge**

$K_{dr}$

adjusted *coefficient of discharge* (3.16) for the safety valve or CSPRS

Note 1 to entry: See ISO 4126-1, ISO 4126-4, or ISO 4126-5 as applicable.