

---

---

**Electronic fee collection — Test  
procedures for user and fixed  
equipment —**

**Part 2:  
Conformance test for the on-board  
unit application interface**

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

*Perception du télépéage — Modes opératoires relatifs aux  
équipements embarqués et aux équipements fixes —*

*Partie 2: Essai de conformité de l'interface d'application de l'unité  
embarquée*

<https://standards.iteh.ai/catalog/standards/sist/66757317-4d9d-4656-8543-f8cdf99b12f/iso-ts-14907-2-2016>



**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO/TS 14907-2:2016

<https://standards.iteh.ai/catalog/standards/sist/66757317-4d9d-4656-8543-f8cdc99b12f/iso-ts-14907-2-2016>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

	Page
Foreword.....	iv
Introduction.....	v
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references.....</b>	<b>4</b>
<b>3 Terms and definitions.....</b>	<b>5</b>
<b>4 Abbreviated terms.....</b>	<b>6</b>
<b>5 OBU and supporting information.....</b>	<b>8</b>
5.1 ICS.....	8
5.2 IXIT.....	8
<b>6 Testing requirements.....</b>	<b>9</b>
6.1 Conceptual test architecture.....	9
6.2 Conformance test system.....	10
6.2.1 Functionality of tester.....	10
6.2.2 Conformance testing.....	11
6.3 Test documentation.....	11
6.3.1 Tester.....	11
6.3.2 Test methods and test cases.....	11
6.3.3 Test results.....	11
<b>Annex A (normative) Implementation conformance statement proforma.....</b>	<b>12</b>
<b>Annex B (normative) Implementation of extra information for testing (IXIT) proforma.....</b>	<b>25</b>
<b>Annex C (informative) OBU test cases.....</b>	<b>29</b>
<b>Annex D (informative) OBE conformance test procedures conducted in Japan.....</b>	<b>70</b>
<b>Bibliography.....</b>	<b>75</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword — Supplementary information](#).

The committee responsible for this document is ISO/TC 204, *Intelligent transport systems*.

This third edition cancels and replaces the second edition (ISO/TS 14907-2:2011), which has been technically revised with the following changes:

- updated references to clauses and annexes in accordance with ISO 14906:2011/Amd1:2015;
- updated [Annex D](#) to reflect current situation in Japan.

ISO/TS 14907 consists of the following parts, under the general title *Electronic fee collection — Test procedures for user and fixed equipment*:

- *Part 1: Description of test procedures*
- *Part 2: Conformance test for the on-board unit application interface*

## Introduction

This part of ISO/TS 14907 describes tests that verify on-board unit (OBU) conformance of implementations of functions and data structures for electronic fee collection (EFC) applications.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO/TS 14907-2:2016

<https://standards.iteh.ai/catalog/standards/sist/66757317-4d9d-4656-8543-f8cdf99b12f/iso-ts-14907-2-2016>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO/TS 14907-2:2016

<https://standards.iteh.ai/catalog/standards/sist/66757317-4d9d-4656-8543-f8cdf99b12f/iso-ts-14907-2-2016>

# Electronic fee collection — Test procedures for user and fixed equipment —

## Part 2: Conformance test for the on-board unit application interface

### 1 Scope

This part of ISO/TS 14907 describes tests that verify on-board unit (OBU) conformance of implementations of functions and data structures, as defined in the implementation conformance statement based on ISO 14906:2011/Amd1:2015, for electronic fee collection (EFC) applications. After the tests of isolated data items and functions ([C.2](#) to [C.4](#)), an example is given for testing of a complete EFC transaction ([C.3](#)).

The scope of this part of ISO/TS 14907 comprises definitions of OBU conformance assessment tests of

- basic dedicated short-range communication (DSRC) L7 functionality,
- EFC application functions,
- EFC attributes (i.e. EFC application information),
- the addressing procedures of EFC attributes and (hardware) components [e.g. integrated circuit cards (ICC) and man-machine interfaces (MMI)],
- the EFC transaction model, which defines the common elements and steps of any EFC transaction, and
- the behaviour of the interface so as to support interoperability on an EFC-DSRC application interface level, see [Figure 1](#).

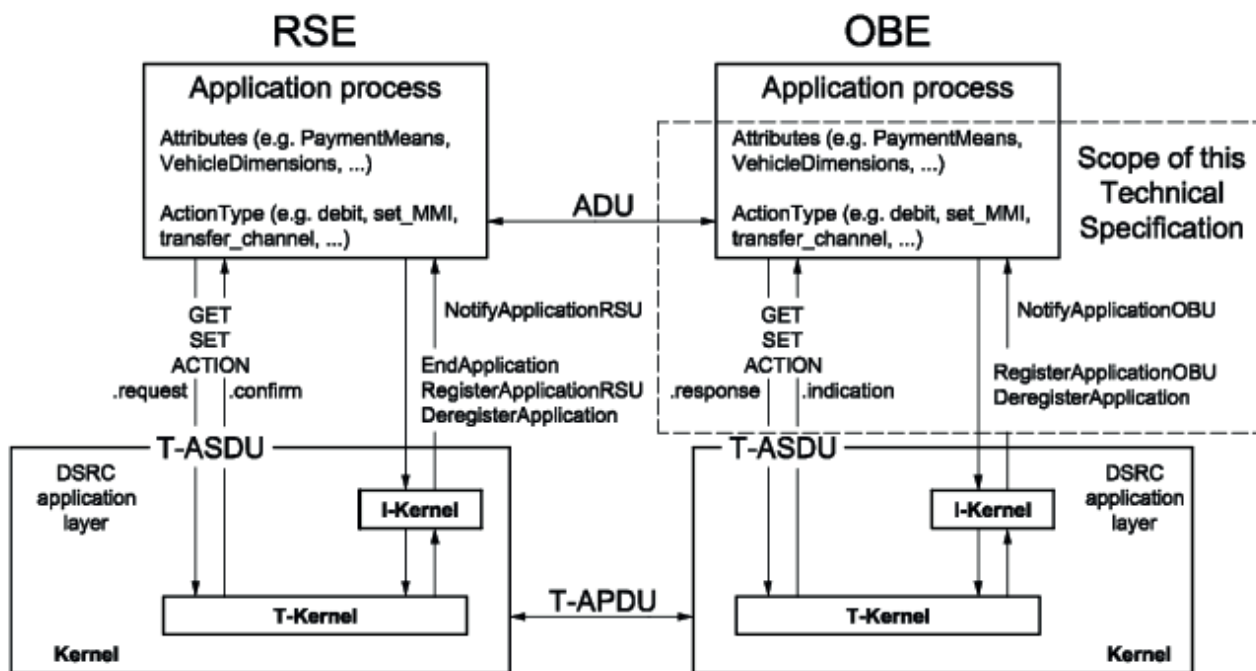


Figure 1 — The EFC application interface

The purpose of this part of ISO/TS 14907 is to define tests that

- assess OBU capabilities,
- assess OBU behaviour, <https://standards.iteh.ai/catalog/standards/sist/66757317-4d9d-4656-8543-f8c9b12f/iso-ts-14907-2-2016>
- serve as a guide for OBU conformance evaluation and type approval,
- achieve comparability between the results of the corresponding tests applied in different places at different times, and
- facilitate communications between parties.

Whereas, this part of ISO/TS 14907 defines examples of test cases for DSRC and EFC functionality in [Annex C](#), it does not intend to specify a complete test suite for a certain implementation. To compose a test suite for a specific EFC implementation, the test cases may have to be modified and new test cases may have to be defined and added in order for the conformance test to be complete. It can be useful to take into account the following considerations when defining a complete test suite

- small range: “exhaustive testing” of critical interoperability/compatibility features,
- large range: testing of boundaries and random values, and
- composite types: testing of individual items in sequence or parallel.

[Figure 2](#) shows the overall procedure of conformance testing.



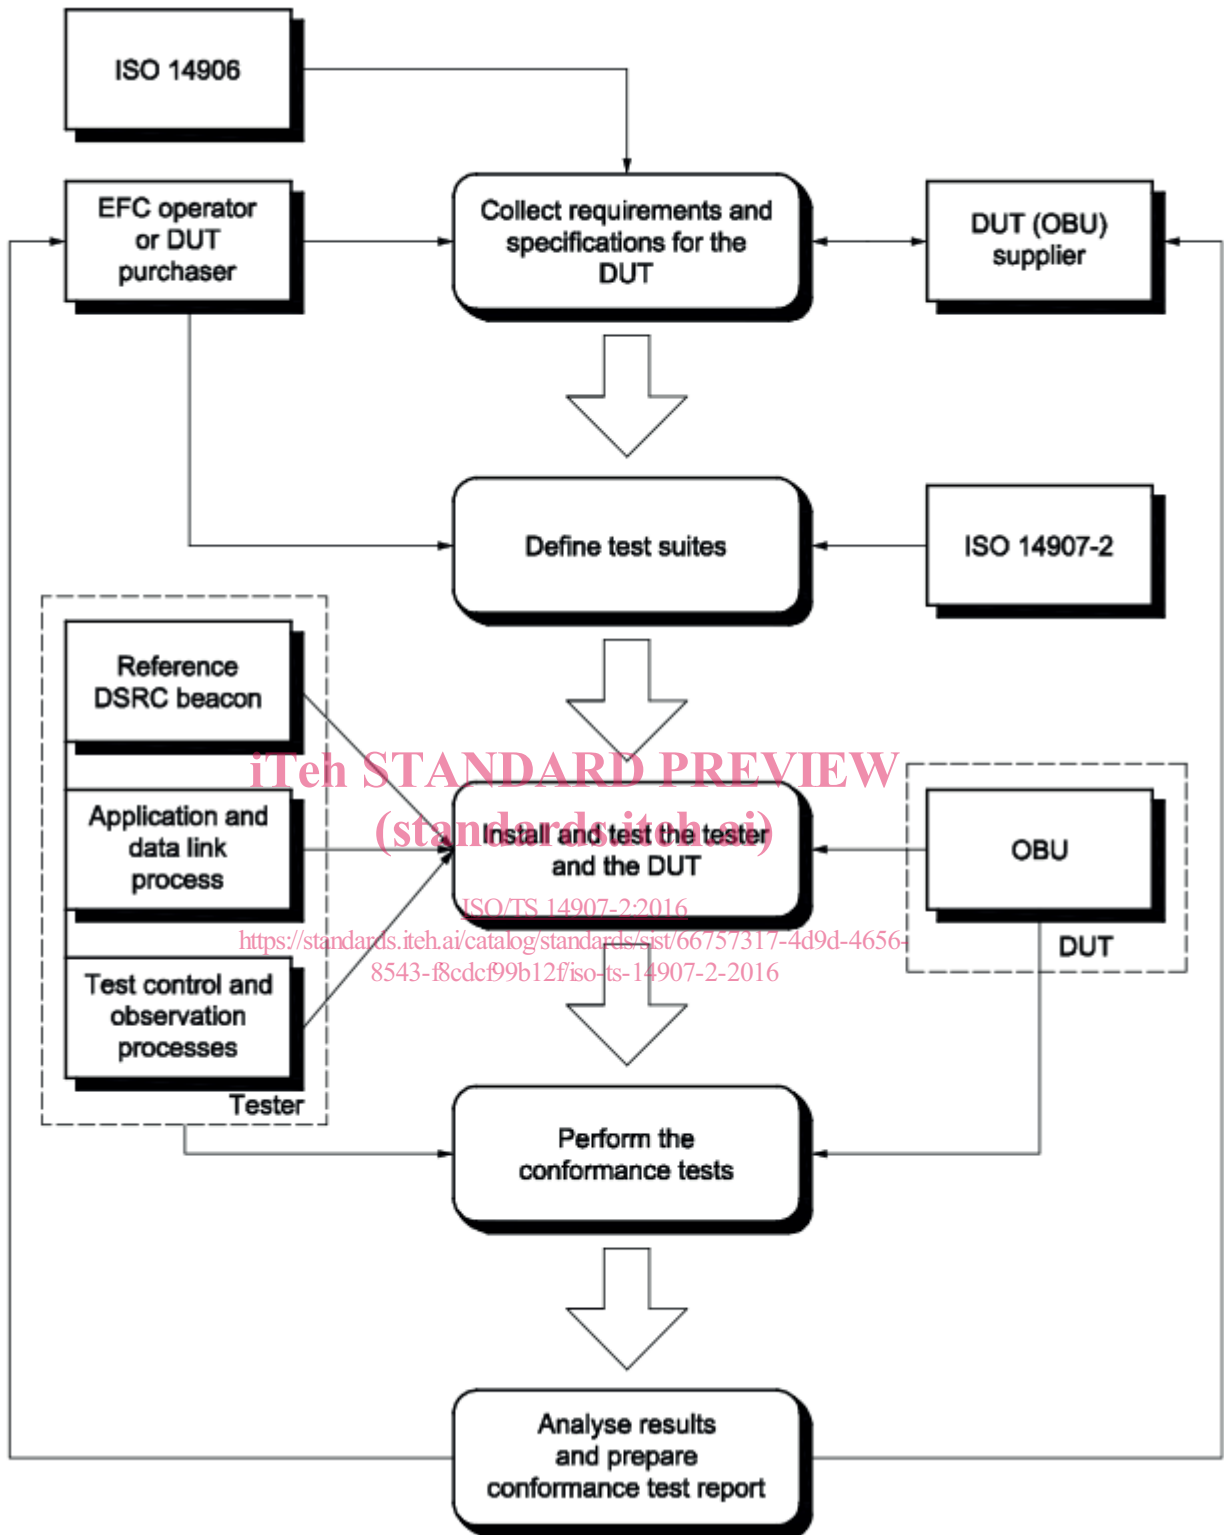


Figure 2 — Conformance testing process

Figure 3 gives a more detailed picture of the interface between the entity performing the conformance test and the supplier of the Device Under Test (DUT). By the EFC application specification, the implementation conformance statement proforma and the implementation extra information for testing proforma the supplier is requested to provide the DUT (OBU), containing the Implementation

Under Test (IUT), as well as the documentation needed to perform the tests. More details on the content of the different documents are given in [Clause 5](#) on OBU and supporting information.

NOTE 1 The Device Under Test contains the Implementation Under Test.

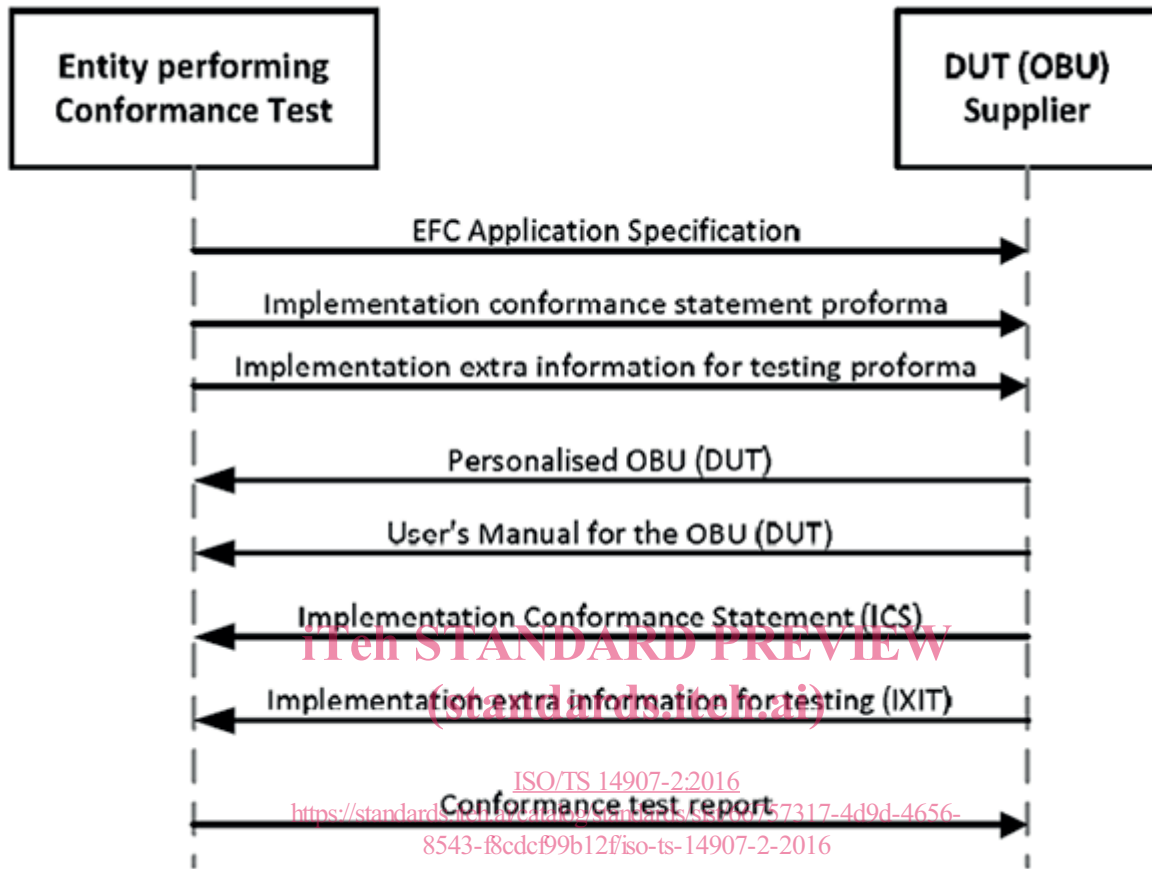


Figure 3 — Documentation DUT supplier

It is outside the scope of this part of ISO/TS 14907 to define tests that assess

- performance,
- robustness, and
- reliability of an implementation.

NOTE 2 ISO/TS 14907-1 defines test procedures that are aimed at assessing performance, robustness and reliability of EFC equipment and systems.

NOTE 3 The ISO/IEC 10373 series defines test methods for proximity, vicinity, integrated circuit(s) cards and related devices that may be relevant for OBUs that support such cards.

[Annex D](#) provides an informative overview of Japanese OBE conformance tests that are based on the ISO/TS 14907 series, in order to illustrate how these can be applied in practice.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14906:2011/Amd1:2015, *Electronic fee collection — Application interface definition for dedicated short-range communication*

EN 12834:2003, *Road transport and traffic telematics — Dedicated short-range communication (DSRC) — DSRC application layer*

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

#### 3.1

##### **access credentials**

trusted attestation or secure module that establishes the claimed identity of an object or application

[SOURCE: EN 15509:2014, 3.1]

#### 3.2

##### **attribute**

addressable package of data consisting of a single data element or structured sequences of data element

[SOURCE: ISO 17575-1:—, 3.2]

#### 3.3

##### **authenticator**

data, possibly encrypted, that is used for authentication

[SOURCE: EN 15509:2014, 3.3]

#### 3.4

##### **channel**

information transfer path

[SOURCE: ISO/IEC 7498-2:1989, 3.3.13]

#### 3.5

##### **element**

DSRC directory containing application information in the form of attributes

[SOURCE: ISO 14906:2011, 3.11, modified]

#### 3.6

##### **implementation conformance statement**

statement of capabilities and options that have been implemented defining to what extent it is compliant with a given specification

#### 3.7

##### **implementation conformance statement proforma**

document, in the form of a questionnaire, which when completed for an implementation or system becomes an implementation conformance statement (ICS)

[SOURCE: ISO/IEC 9646-1:1994, 3.3.40]

#### 3.8

##### **implementation extra information for testing**

statement containing all of the information related to the implementation under test (IUT) and its corresponding system under test (SUT) which will enable the testing laboratory to run an appropriate test suite against that IUT

[SOURCE: ISO/IEC 19015:2000, 3.20]

**3.9 implementation extra information for testing proforma**  
document, in the form of a questionnaire, which when completed for an implementation under test (IUT) becomes an implementation extra information for testing (IXIT)

[SOURCE: ISO/IEC 9646-1:1994, 3.3.42]

**3.10 on-board equipment**  
all required equipment on-board a vehicle for performing required EFC functions and communication services

**3.11 on-board unit**  
single electronic unit on-board a vehicle for performing specific EFC functions and for communication with external systems

Note 1 to entry: An OBU always includes, in this context, at least the support of the DSRC interface.

**3.12 roadside equipment**  
equipment located along the road, either fixed or mobile

**3.13 service primitive**  
elementary communication service provided by the application layer protocol to the application processes

[SOURCE: ISO 14906:2011, 3.18, modified]

**3.14 transaction**  
whole of the exchange of information between two physically separated communication facilities

[SOURCE: ISO 17575-1 :—, 3.21]

**3.15 transaction model**  
functional model describing the general structure of electronic payment transactions

[SOURCE: ISO 14906:2011, 3.25, modified]

## 4 Abbreviated terms

For the purposes of this document, the following abbreviated terms and variables apply.

AC_CR	Access credentials
ACn	Acknowledged command/response
ADU	Application Data Unit (ISO 14906)
APDU	Application Protocol Data Unit (ISO 14906)
AP	Application Process (ISO 14906)
ARIB	Association of Radio Industries and Businesses
ASCII	American Standard Code for Information Interchange
AVI	Automatic Vehicle Identification
BST	Beacon Service Table (ISO 14906)
cf	Confirm
DSRC	Dedicated Short-Range Communication

DUT	Device Under Test
EID	Element Identifier
EFC	Electronic Fee Collection (ISO 17573)
FTP	File Transfer Protocol
ICS	Implementation Conformance Statement
I-Kernel	Initialization Kernel
IID	Invoker Identifier
ind	Indication
IUT	Implementation Under Test
IXIT	Implementation eXtra Information for Testing
L1	Layer 1 of DSRC (physical layer)
L2	Layer 2 of DSRC (data link layer)
L7	Application Layer Core of DSRC
LID	Logical Link Control Identifier
LLC	Logical Link Control
LPDU	LLC Protocol Data Unit
LSDU	Link Layer Service Data Unit (EN 12795)
M <sub>a</sub>	ManufacturerID (EN 12834)
MAC	Medium Access Control
MMI	Man-Machine Interface
n.a.	Not applicable
NE_OK	Command accepted/Response LSDU not yet available (EN 12795)
OBE	On-board equipment
OBU	On-board unit
ORSE	Organization for Road System Enhancement
P <sub>a,b,c,d</sub>	Profile, example P <sub>0</sub> denotes Profile 0.
PDU	Protocol Data Unit
PoC	Point of Control
PoO	Point of Observation
PPDU	Physical Layer Protocol Data Unit
PrWA	Private Window Allocation (EN 12795)
PrWRq	Private Window Request (EN 12795)
req	Request
rs	Response
RSE	Roadside Equipment
SAM	Secure Application Module
T-APDU	Transfer-Application Protocol Data Unit
T-ASDU	Transfer-Application Service Data Unit
T-Kernel	Transfer Kernel
TTI	Traffic and Traveller Information
VST	Vehicle Service Table

## 5 OBU and supporting information

The supplier shall provide the OBU, i.e. the DUT, and the associated information, including:

- OBUs personalized to be able to perform tests according to the ICS and IXIT as defined in [5.1](#) and [5.2](#), respectively. At least five samples shall be submitted for test. More samples may be needed if several different data structures and data contents are required in the tests;
- user's manual for the OBU, which shall include instructions how to handle the equipment, and may include further detailed information about the protocol functions;
- implementation conformance statement according to [5.1](#). The ICS shall include statements regarding the following:
  - layer 7 services that are implemented in the OBU;
  - EFC functions (action types) that are implemented in the OBU;
  - whether or not data elements are used;
- implementation extra information for testing according to [5.2](#). The IXIT shall, if applicable, include:
  - a statement regarding which layer 2 services shall be used to transfer the L7 services (and EFC services);
  - a description of security calculations in the OBU including a specification of the encryption algorithm used;
  - values of the test Master Keys for calculation and verification of OBU security data such as authenticators and access credentials.

The supplier should also provide configuration/personalization equipment for the OBU if that ensures effective testing.

### 5.1 ICS

The ICS is a statement made by the supplier that claims conformance to a certain specification. The ICS states which capabilities have been implemented in the specifications. It also states possible limitations in the implementation of the specification.

This Technical Specification describes testing of implementations according to the following standards:

- EN 12834;
- ISO 14906.

[Annex A](#) contains the ICS proforma that shall be used for the ICS.

### 5.2 IXIT

The IXIT is a statement made by the supplier or an implementer of an IUT which contains or references all of the information, in addition to that given in the implementation conformance statement, related to the DUT and its testing environment. The IXIT enables the test laboratory to run an appropriate test suite against the DUT.

In this Technical Specification, the IXIT specifies the services in the lower communication layers that shall be used to perform the services to be tested. These services are described e.g. in EN 12795, EN 12253 and EN 13372.

The IXIT shall also contain further information and describe algorithms and procedures that are not specified in the above standards but are prerequisites to perform the testing. Examples of such information are

- content of the ApplicationContextMark in the VST,
- calculation of access credentials in DSRC services,
- use of returnCode in DSRC L7 services and EFC functions, and
- calculation of authenticators in EFC functions.

[Annex B](#) contains the IXIT proforma that shall be used for the declaration of the IXIT.

## 6 Testing requirements

### 6.1 Conceptual test architecture

A remote test method shall be used for the conformance test of OBUs (DUT). [Figure 4](#) shows the conceptual testing architecture of tester and DUT. The conformance test is only related to the implementation of the DUT.

The PoC, which is the point where the test events are controlled, shall be implemented inside the tester on the interface between the application layer and the application process.

The PoO, which is the point where the occurrence of test events is to be observed, shall be implemented inside the tester on the interface between the application layer and the application process. The PoO must also interface the data link layer since some tests require observation of the behaviour on this layer.

The PoC and PoO are characterized by a set of ASPs, according to the specifications of the tests. The test events observed at the PoO may be supplemented by information provided by other sub-units, e.g. MMI or an IC card if available with the DUT.

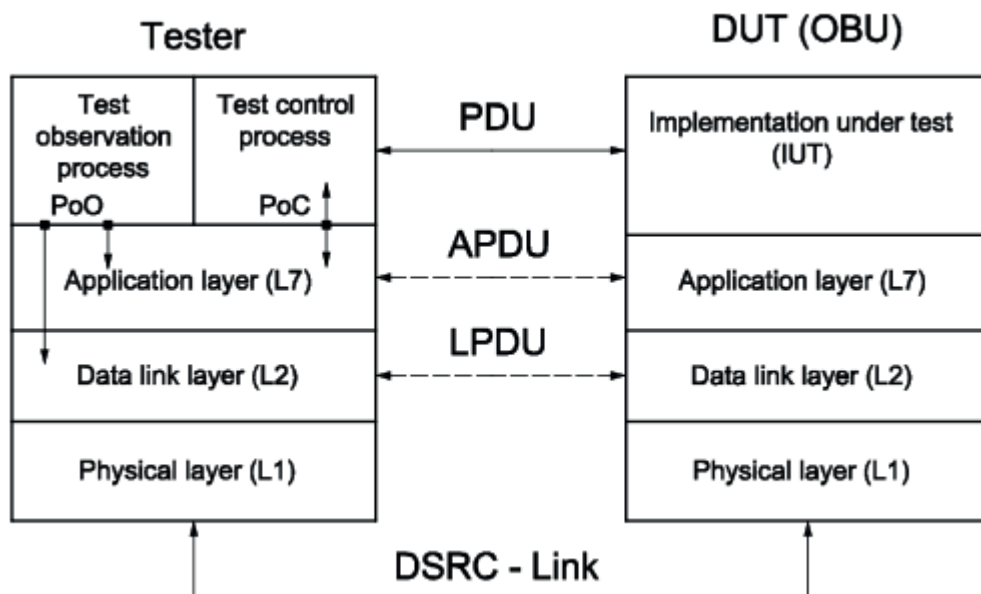


Figure 4 — Conceptual architecture of the conformance test