

---

---

**Fluid power systems — O-rings —**  
**Part 2:**  
**Housing dimensions for general**  
**applications**

*Transmissions hydrauliques et pneumatiques — Joints toriques —*  
*Partie 2: Dimensions des logements pour applications générales*

(<https://standards.iteh.ai>)  
Document Preview

[ISO 3601-2:2016](https://standards.iteh.ai/catalog/standards/iso/5a638039-ce61-4b07-87de-b4ca53deca31/iso-3601-2-2016)

<https://standards.iteh.ai/catalog/standards/iso/5a638039-ce61-4b07-87de-b4ca53deca31/iso-3601-2-2016>



iTeh Standards  
(<https://standards.iteh.ai>)  
Document Preview

ISO 3601-2:2016

<https://standards.iteh.ai/catalog/standards/iso/5a638039-ce61-4b07-87de-b4ca53deca31/iso-3601-2-2016>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
[copyright@iso.org](mailto:copyright@iso.org)  
[www.iso.org](http://www.iso.org)

# Contents

	Page
Foreword .....	iv
Introduction .....	v
<b>1 Scope .....</b>	<b>1</b>
<b>2 Normative references .....</b>	<b>1</b>
<b>3 Terms and definitions .....</b>	<b>1</b>
<b>4 Symbols .....</b>	<b>1</b>
<b>5 O-ring housings .....</b>	<b>3</b>
<b>6 Requirements .....</b>	<b>13</b>
<b>7 Identification statement .....</b>	<b>14</b>
<b>Annex A (informative) Correlation of ISO 3601-1 aerospace O-ring size identification code with EN 3748 O-ring housing codes .....</b>	<b>48</b>
<b>Annex B (informative) Determination of the proper O-ring size for custom housings used for radial and axial applications .....</b>	<b>49</b>
<b>Bibliography .....</b>	<b>54</b>

iTeh Standards  
(<https://standards.itih.ai>)  
Document Preview

[ISO 3601-2:2016](#)

<https://standards.itih.ai/catalog/standards/iso/5a638039-ce61-4b07-87de-b4ca53deca31/iso-3601-2-2016>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](http://www.iso.org/foreword)

The committee responsible for this document is ISO/TC 131, *Fluid power systems*, Subcommittee SC 7, *Sealing devices*.

This second edition cancels and replaces the first edition (ISO 3601-2:2008), which has been technically revised.

ISO 3601 consists of the following parts, under the general title *Fluid power systems — O-rings*:

- *Part 1: Inside diameters, cross-sections, tolerances and designation codes*
- *Part 2: Housing dimensions for general applications*
- *Part 3: Quality acceptance criteria*
- *Part 4: Anti-extrusion rings (back-up rings)*
- *Part 5: Specification of elastomeric materials for industrial applications*

## Introduction

In fluid power systems, power is transmitted and controlled through a fluid (liquid or gas) under pressure within an enclosed circuit. To avoid leakage or to seal different chambers of a component from each other, sealing devices are used. O-rings are one type of sealing devices. To seal properly, an O-ring has to be used in an appropriate housing for the application.

[Annex A](#) and [Annex B](#) of this part of ISO 3601 are for information only.

iTeh Standards  
(<https://standards.iteh.ai>)  
Document Preview

ISO 3601-2:2016

<https://standards.iteh.ai/catalog/standards/iso/5a638039-ce61-4b07-87de-b4ca53deca31/iso-3601-2-2016>



# Fluid power systems — O-rings —

## Part 2: Housing dimensions for general applications

### 1 Scope

This part of ISO 3601 specifies the housing (gland) dimensions for class A O-rings for general industrial applications conforming to ISO 3601-1, as well as housing dimensions for class B O-rings used on selected metric-dimensioned hardware, e.g. fluid power cylinder bores and piston rods. These O-rings are for use in general hydraulic and pneumatic applications without and with anti-extrusion rings (back-up rings). The dimensions of the O-rings ( $d_1$  and  $d_2$ ), size codes (SC) and tolerances conform to ISO 3601-1.

Housing dimensions for the O-rings intended for aerospace applications that are specified in ISO 3601-1 are addressed in [Annex A](#).

NOTE 1 It is expected that O-ring housing dimensions for special applications be agreed upon between the O-ring manufacturer and the user.

NOTE 2 The terms “housing”, “groove” and “gland” are interchangeable, and their usage is a matter of local convenience. In this part of ISO 3601, the term “housing” is used exclusively.

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3601-1:2012, *Fluid power systems — O-rings — Part 1: Inside diameters, cross-sections, tolerances and designation codes*

ISO 3601-4, *Fluid power systems — O-rings — Part 4: Anti-extrusion rings (back-up rings)*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 8015, *Geometrical product specifications (GPS) — Fundamentals — Concepts, principles and rules*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 apply.

### 4 Symbols

For the purposes of this document, the following symbols are used in this part of ISO 3601.

$A_{cs1}$	cross-sectional area of the O-ring
$A_{cs2}$	cross-sectional area of the O-ring housing
$a$	roughness of the side surface of the O-ring housing
$b_x$	width of the O-ring housing
$b_1$	width of the O-ring housing without an anti-extrusion ring (back-up ring)


<i>b</i> <sub>2</sub>	width of the O-ring housing with one anti-extrusion ring (back-up ring)
<i>b</i> <sub>3</sub>	width of the O-ring housing with two anti-extrusion rings (back-up rings)
<i>b</i> <sub>4</sub>	width of the O-ring axial housing
<i>C</i>	percentage of effective O-ring cross-section compression
<i>c</i>	surface roughness of the O-ring housing base
<i>d</i>	roughness of the mating surface of the O-ring
<i>d</i> <sub>1</sub>	O-ring inside diameter
<i>d</i> <sub>2</sub>	O-ring cross-section diameter
<i>d</i> <sub>3</sub>	housing inside diameter for piston application
<i>d</i> <sub>4</sub>	bore diameter for piston application
<i>d</i> <sub>5</sub>	rod diameter
<i>d</i> <sub>6</sub>	housing outside diameter for rod application
<i>d</i> <sub>7</sub>	outside diameter of housing for axial (face) sealing
<i>d</i> <sub>8</sub>	inside diameter of housing for axial (face) sealing
<i>d</i> <sub>9</sub>	piston diameter
<i>d</i> <sub>10</sub>	bore diameter for rod application
<i>e</i>	surface roughness of lead-in chamfer
<i>F</i>	approximate percentage of housing fill
<i>f</i>	housing radius (also known as edges of undefined shape)
<i>g</i>	extrusion gap
<i>h</i>	height of seal housing
<i>R</i>	percentage of O-ring cross-sectional reduction resulting from diametral stretch
<i>S</i>	percentage of inside diameter stretch
SC	O-ring size code from ISO 3601-1
<i>t</i>	total radial housing depth
<i>t</i> <sub>x</sub>	approximate radial housing depth
<i>Y</i>	maximum run-out tolerance
<i>z</i>	length of lead-in chamfer



## 5 O-ring housings


### 5.1 Typical O-ring applications

5.1.1 [Figure 1](#) shows a typical O-ring as presented in ISO 3601-1.

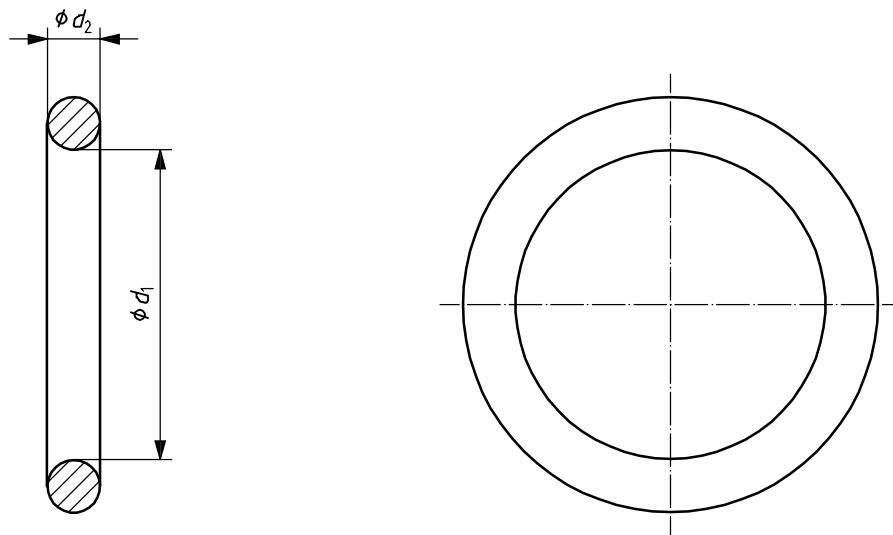

**Figure 1 — Typical O-ring configuration**

5.1.2 [Figure 2](#) shows the features of an O-ring housing for use in dynamic rod and piston applications.

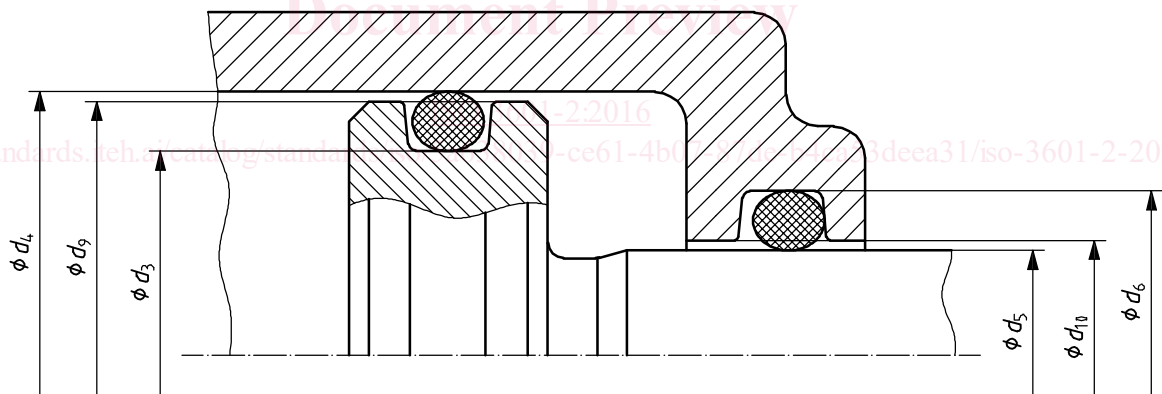

**Figure 2 — Features of housings for dynamic rod and piston applications**

5.1.3 Figure 3 shows the features of O-ring housings used in static rod and piston applications. It also shows an example of a face (axial) seal.

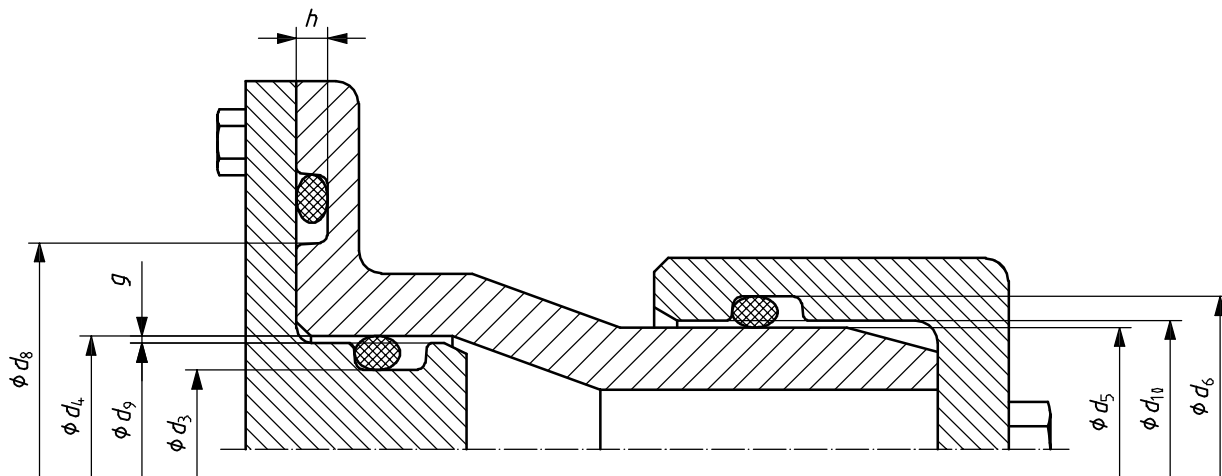


Figure 3 — Features of housings for static rod and piston applications


5.1.4 O-ring housings for face seal applications have different dimensional requirements depending upon whether the pressure is internal or external to the system. See Figure 4 for illustrations.

(<https://standards.iteh.ai>)  
Document Preview

ISO 3601-2:2016

<https://standards.iteh.ai/catalog/standards/iso/5a638039-ce61-4b07-87de-b4ca53deca31/iso-3601-2-2016>


Dimensions in millimetres

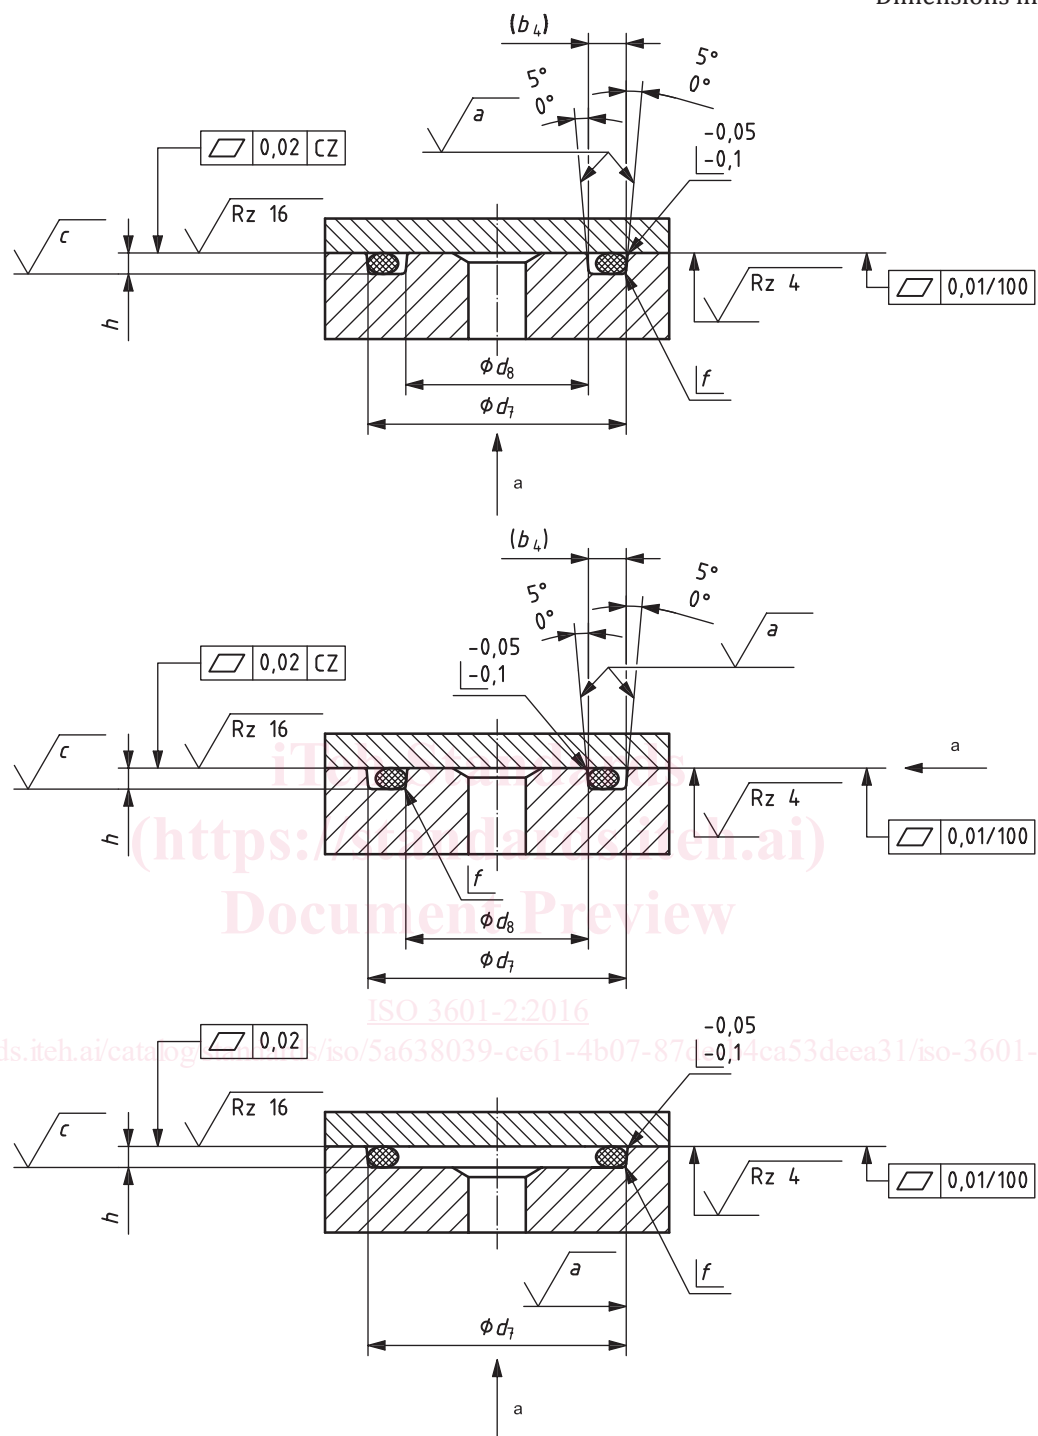**Key** $a, c$  surface roughness; see Table 6 $b_4$  bore diameter for piston application; see Table 6 $f$  housing radius; see Table 6 $a$  Direction of pressure.

NOTE Tolerancing is in accordance with ISO 8015.

**Figure 4 — Illustrations of housings for face seal applications**

5.1.5 [Figure 5](#) shows examples of widths of O-ring housings for use with or without anti-extrusion rings (back-up rings). Recommendations for the use of anti-extrusion rings are given in ISO 3601-4.

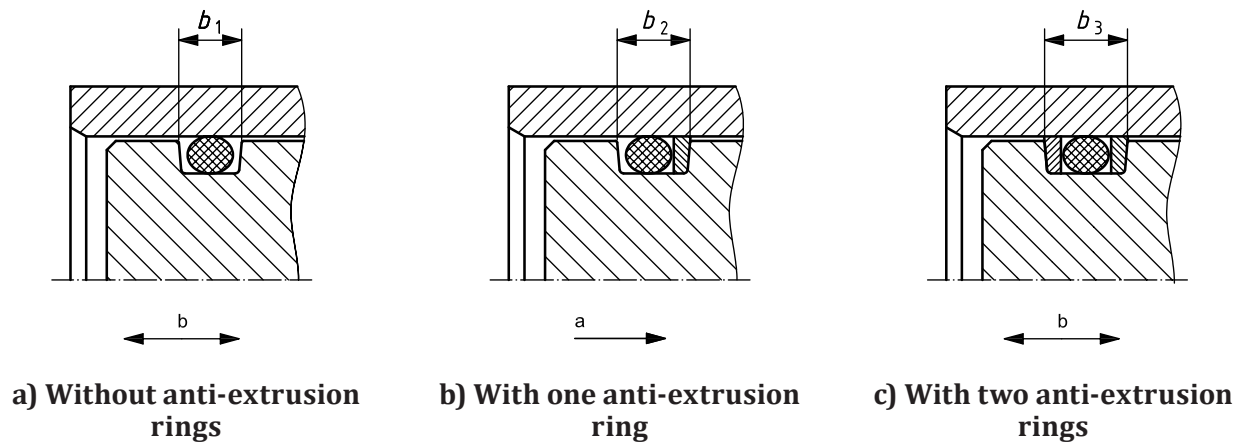

#### Key

- a Pressure acting in one direction.
- b Pressure acting in alternating directions.

**Figure 5 — Widths of O-ring housings, for use with or without anti-extrusion rings (back-up rings)**

## 5.2 Surface roughness

5.2.1 The surface roughness of the O-ring housing and any mating part has a significant impact on the life and sealing performance of the O-ring.


5.2.2 Unless otherwise agreed, surface roughness values shall be in accordance with [Table 1](#). Surface roughness values of the housings for the O-rings intended for aerospace applications that are specified in ISO 3601-1 are addressed in [Annex A](#).

5.2.3 Unless otherwise agreed, the material ratio,  $R_{mr}$ , should be 50 % to 80 % for surfaces of mating parts, determined at a cut depth of  $C = 0,25 R_z$ , relative to a reference profile line of  $C_0 = 0,05 R_{mr}$  (see ISO 4287:1997, 4.5.2).

## 5.3 Housing dimensions

5.3.1 [Figure 6](#) shows a cross-section of a typical piston housing, illustrating the housing width,  $b_x$ , housing height,  $h$ , the total distance between the sealing surface and the housing height,  $t$ , the gap between the sealing elements,  $g$ , the edges of undefined shape,  $f$ , and the surfaces for which surface roughness requirements are specified. All of these features have different values depending on the application.

Dimensions in millimetres

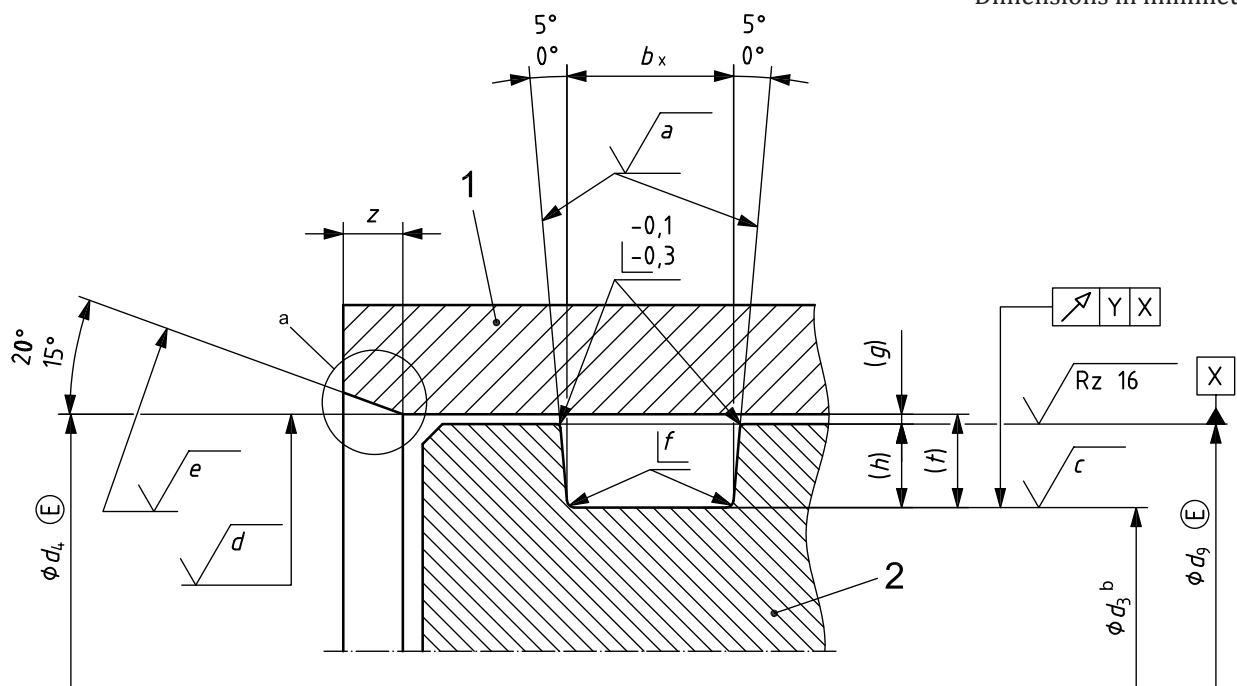**Key**

- 1 bore  
2 Piston

$a, c, d, e$  surface roughness; see Table 1

$f$  housing radius; see Table 1

$b_x$  width of O-ring housing

$a$  No burrs are permitted in this area; the edge shall be rounded.


$b$  Housing diameter  $d_3 \leq 50$ : maximum run-out tolerance  $Y = 0,025$ ;

housing diameter  $d_3 > 50$ : maximum run-out tolerance  $Y = 0,05$ .

NOTE Tolerancing is in accordance with ISO 8015.

**Figure 6 — Dimensions of piston seal housings**

**5.3.2** Figure 7 shows a cross-section of a typical rod housing, illustrating the housing width,  $b_x$ , housing height,  $h$ , the total distance between the sealing surface and the housing height,  $t$ , the gap between the sealing elements,  $g$ , edges of undefined shape,  $f$ , and the surfaces for which surface roughness requirements are specified. All of these features have different values depending on the application.

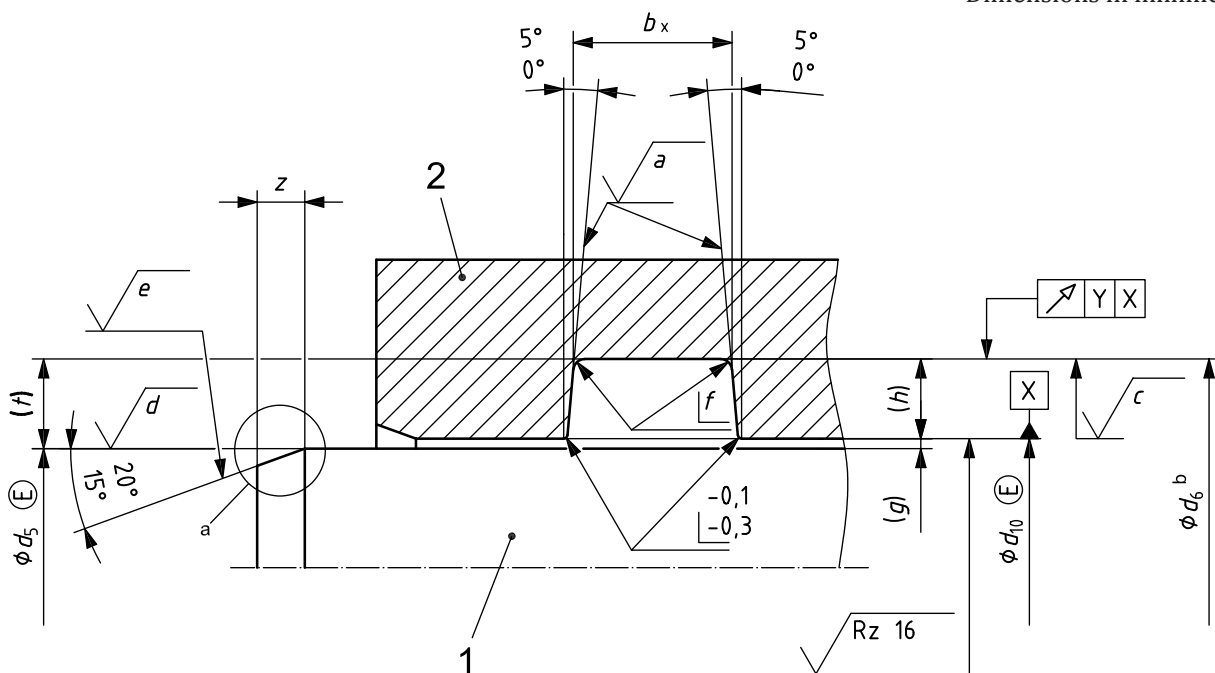**Key**

- 1 rod  
2 bore

*a, c, d, e* surface roughness; see [Table 1](#)

*f* housing radius; see [Table 1](#)

*b<sub>x</sub>* width of O-ring housing

*a* No burrs are permitted in this area; the edge shall be rounded.

*b* Housing diameter  $d_6 \leq 50$ : maximum run-out tolerance  $Y = 0,025$ ;  
housing diameter  $d_6 > 50$ : maximum run-out tolerance  $Y = 0,05$ .

NOTE Tolerancing is in accordance with ISO 8015.

**Figure 7 — Dimensions of rod seal housings**

**5.3.3** The latest International Standards for surface roughness measurement require new statements for roughness requirements. Because of the short measuring length, an exact roughness is not measurable. In these cases, a visual inspection using master parts is permitted.

#### 5.4 Corners and edges of undefined shape

Values for inside corner edge, *f*, that depend on the cross-sections of housings and rods are specified in [Table 1](#). Values for the undefined edge of the housing outside corner are specified in [Figures 6](#) and [7](#).

#### 5.5 Lead-in chamfer

**5.5.1** A lead-in chamfer with an angle of 15° to 20° shall be used to prevent damage to the O-ring by either the rod or the piston upon assembly into the cylinder bore. Chamfer edges shall be rounded. [Figures 6](#) and [7](#) illustrate lead-in chamfers for piston and rod housings, respectively.

**5.5.2** Values for the lengths of lead-in chamfers, dimension *z*, for the cross-sections of housings and rods are specified in [Table 1](#).