

DRAFT INTERNATIONAL STANDARD

ISO/DIS 24095

ISO/TC 146/SC 2

Secretariat: ANSI

Voting begins on:
2020-07-20

Voting terminates on:
2020-10-12

Workplace air — Guidance for the measurement of respirable crystalline silica

Air des lieux de travail — Exigences minimales pour le mesurage de la fraction alvéolaire de la silice cristalline

ICS: 13.040.30

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/DIS 24095](https://standards.iteh.ai/catalog/standards/sist/4795fd91-4720-4917-a605-79e01f56156e/iso-dis-24095)

<https://standards.iteh.ai/catalog/standards/sist/4795fd91-4720-4917-a605-79e01f56156e/iso-dis-24095>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.



Reference number
ISO/DIS 24095:2020(E)

© ISO 2020

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/DIS 24095

<https://standards.iteh.ai/catalog/standards/sist/4795fd91-4720-4917-a605-79e01f56156e/iso-dis-24095>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Principle	2
5 Analytical quality requirements	3
6 Administrative controls	3
7 Sampling	4
7.1 General	4
7.2 Sampler	4
7.3 Filters and foams	4
7.4 Sampling flow measurement devices and pumps	5
7.5 Sampling period	5
7.6 Transportation	6
8 Procedures	6
8.1 Handling of filter cassettes	6
8.2 Method validation	7
8.3 Calibration of the analysis	7
8.4 Sample preparation	8
8.5 Sample measurement	9
8.5.1 Limit of Detection	9
8.5.2 X-ray diffraction	9
8.5.3 Infrared analysis	9
8.6 Instrumental variation	9
8.6.1 X-ray diffraction	9
8.6.2 Infrared analysis	10
9 Internal quality control	10
10 External verification and assessment of uncertainty	11
11 Test report	11
11.1 Minimum report requirements	11
11.2 Data to be archived by the laboratory	12
Annex A (informative) Polymorphs of crystalline silica and their interferences	13
Annex B (informative) The quantification of cristobalite using X-ray diffraction	18
Annex C (informative) Example of quality control charting for respirable crystalline silica	22
Annex D (informative) Estimation of expanded uncertainty for measurements of respirable crystalline silica	23
Annex E (informative) Differences between samplers (cyclones and other types)	32
Annex F (informative) Use of proficiency test data to evaluate the performance of XRD and IR methods in the presence of interferences	34
Bibliography	39

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 24095 was prepared by Technical Committee ISO/TC 146, *Air quality*, Subcommittee SC 2, *Workplace atmospheres*.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/DIS 24095

<https://standards.iteh.ai/catalog/standards/sist/4795fd91-4720-4917-a605-79e01f56156e/iso-dis-24095>

Introduction

Respirable crystalline silica (RCS) is a hazard to the health of workers in many industries through exposure by inhalation. Industrial hygienists and other public health professionals need to determine the effectiveness of measures taken to control workers' exposure. Taking samples of air during a work activity and then measuring the amount of RCS present is often done to assess the exposure of an individual, the effectiveness of their respiratory protection or effectiveness of other controls. Studies have found that procedures to ensure the quality of RCS measurements must be followed to ensure results are fit-for-purpose. This is especially true if it is desired to accurately measure RCS at levels below applicable occupational exposure limit values where greater measurement variability can be observed. Reasonable measurement uncertainty can be achieved with proper controls to limit bias and measurement variability and the usefulness of RCS measurements to make informed decisions to protect worker health can be upheld. This International Standard is intended to be of benefit to those involved in the determination of RCS in the workplace, e.g. agencies concerned with health and safety at work; industrial hygienists; safety and health professionals; analytical laboratories; industrial users and their workers. Readers should be aware that in some countries there are legal requirements for the quality assurance of these measurements.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/DIS 24095](https://standards.iteh.ai/catalog/standards/sist/4795fd91-4720-4917-a605-79e01f56156e/iso-dis-24095)

<https://standards.iteh.ai/catalog/standards/sist/4795fd91-4720-4917-a605-79e01f56156e/iso-dis-24095>

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

ISO/DIS 24095

<https://standards.iteh.ai/catalog/standards/sist/4795fd91-4720-4917-a605-79e01f56156e/iso-dis-24095>

Workplace air — Guidance for the measurement of respirable crystalline silica

1 Scope

This International Standard gives guidelines for the quality assurance of measurements of respirable crystalline silica in air using direct on-filter or indirect X-ray diffraction and infrared analysis methods. The scope of this International Standard includes the following crystalline silica polymorphs: quartz and cristobalite.

These guidelines are also relevant to the analysis of filters obtained from dustiness measurements in accordance with EN 15051^[1].

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7708, *Air quality — Particle size fraction definitions for health-related sampling*

ISO 13137, *Workplace atmospheres — Pumps for personal sampling of chemical and biological agents — Requirements and test methods*

ISO 15767, *Workplace atmospheres — Controlling and characterizing uncertainty in weighing collected aerosols*

ISO 16258-1, *Workplace air — Analysis of respirable crystalline silica by X-ray diffraction — Part 1: Direct-on-filter method*

ISO 16258-2, *Workplace air — Analysis of respirable crystalline silica by X-ray diffraction — Part 2: Method by indirect analysis*

ISO 18158, *Workplace air — Terminology*

ISO 19087, *Workplace air — Analysis of respirable crystalline silica by Fourier-Transform Infrared spectroscopy*

ISO/IEC 17025, *General requirements for the competence of testing and calibration laboratories*

EN 482, *Workplace exposure - General requirements for the performance of procedures for the measurement of chemical agents*

EN 689, *Workplace exposure - Measurement of exposure by inhalation to chemical agents - Strategy for testing compliance with occupational exposure limit values*

EN 13205, *Workplace atmospheres — Assessment of performance of instruments for measurement of airborne particle concentrations*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 18158 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <http://www.electropedia.org/>

3.1 respirable crystalline silica (RCS) RCS

Inhaled particles of crystalline silica that can penetrate to the unciliated airways

3.2 collection substrate

medium on which airborne chemical and/or biological agents are collected for subsequent analysis

Note 1 to entry: In RCS analysis, filters or polyurethane foams, alone or contained within capsules or cassettes are examples of collection substrates for airborne particles. Impinger solutions are not applicable.

[SOURCE: ISO 18158:2016, 2.2.3.7 modified for relevance to RCS measurement]

3.3 analysis filter

A suitable filter used to carry out the RCS analysis.

Note 1 to entry: For direct-on-filter analysis the collection substrate is the analysis filter.

Note 2 to entry: For the indirect analysis the dust is removed from the collection substrate and redeposited onto an analysis filter

4 Principle

iTeh STANDARD PREVIEW
(standards.iteh.ai)

The aim of this International Standard is to give information to select the most appropriate method for the analysis of RCS. In addition, information is provided to minimise the uncertainty in measurement. Therefore, the sections in this standard deal with the many factors that may influence the variability of a measurement around the true value. The uncertainty of an air measurement is the combination of the variation of measurements from the true value from both the sampling and chemical analysis. Within these two broad headings are other factors, some of which are illustrated below.

- a) Organisational factors:
 - 1) strategy;
 - 2) method;
 - 3) training and experience.
- b) Measurement factors:
 - 1) sampling instruments;
 - 2) calibration;
 - 3) sample preparation;
 - 4) instrumental variation;
 - 5) interferences.

The variability of these individual factors combines to add to the uncertainty of the measurement. At stages within the sampling and analysis process, the factors that contribute to the variance of a measurement can be monitored and controlled to reduce the expanded uncertainty. With such an approach, the variation of the measurements is minimised.

The quantifiable contributions to the uncertainty of crystalline silica in air measurement are illustrated in the classic cause and effect diagram often used as an aid to estimate uncertainty in measurement in [Figure 1](#). Add note about relative importance of different contributions to overall uncertainty.

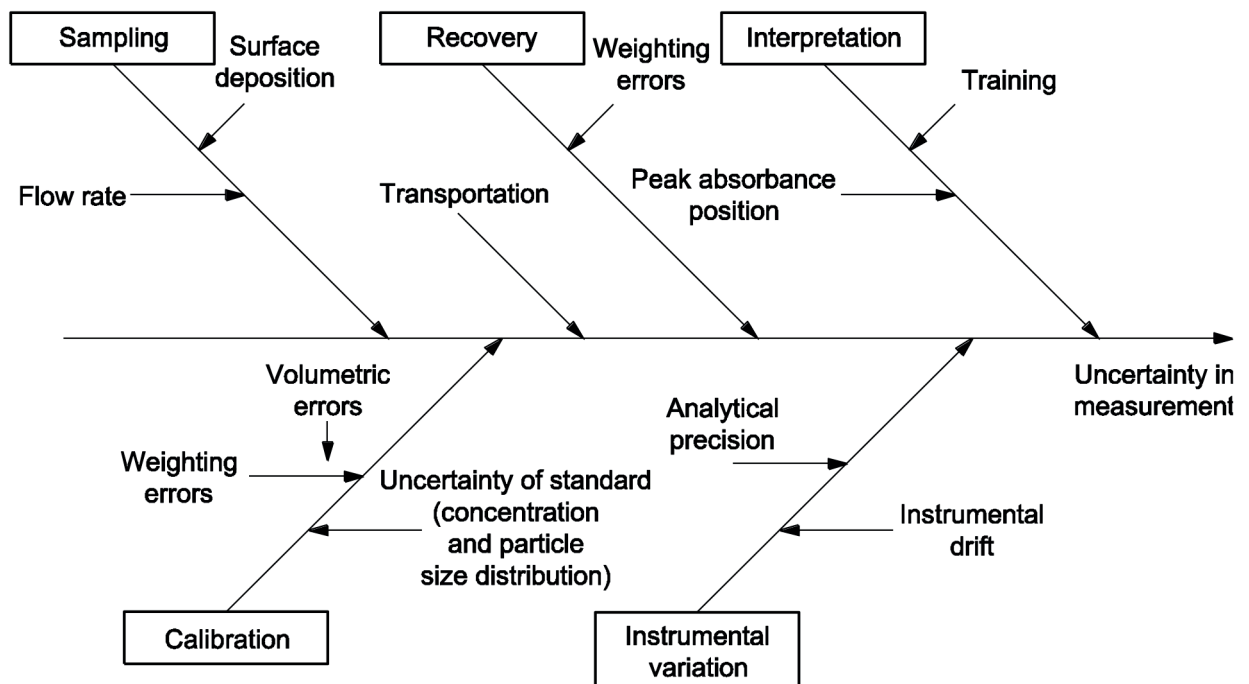


Figure 1 — Cause and effect diagram illustrating sources of uncertainty in the measurement of respirable crystalline silica

5 Analytical quality requirements

The level of analytical quality necessary for effective occupational hygiene monitoring should be considered before establishing requirements for a quality assurance program. Statistical quality control procedures can determine what is currently achievable in terms of intra- and interlaboratory precision and bias and may throw some light on the relative accuracy of different methods, but they do not determine what are desirable levels of trueness and precision.

The existence of legislative requirements to take corrective action when exposure limits are exceeded has a bearing on analytical quality requirements.

NOTE Performance criteria give limits to the expanded uncertainty in occupational hygiene analyses to reduce the potential for incorrect decisions due to the poor precision of results (ISO 20581). This uncertainty includes the imprecision in the sampling and analytical methods and is specified as a maximum of $\pm 30\%$ at the exposure limit value and $\pm 50\%$ at about half the limit value. The National Institute for Occupational Safety and Health (NIOSH) in the USA stipulates an expanded accuracy requirement of $\pm 25\%$ for its occupational hygiene methods based on laboratory tests^[2]. The NIOSH accuracy requirement can be expanded to $\pm 35\%$ for accuracy determined using field comparison of methods^[3]. The relationship between different approaches to determining uncertainty limits have been explored^[4,5].

6 Administrative controls

ISO/IEC 17025 specifically addresses the establishment of a management system to ensure the traceability of measurements. In some countries, accreditation to ISO/IEC 17025 may be a legislative requirement.

Communication between those collecting the samples and those analysing them is encouraged in all cases but is especially important where the analyst does not prepare the sampling media.

Laboratory managers should consider whether analysts would benefit from training in mineralogy and/or advanced analytical techniques, such as peak profile fitting and spectral interferences.

7 Sampling

7.1 General

Sampling strategy shall be considered.

NOTE EN 689 specifies one sampling strategy. Other examples include Reference [6] from the NIOSH and Reference [7] from the American Industrial Hygiene Association (AIHA).

Additional factors that should be considered are matrix effects, product information, and minimum sampling times for low concentrations.

Pumps conforming to the requirements of ISO 13137 are preferred, and the main requirement concerning pump pulsation from ISO 13137 shall be fulfilled for the pumps in use.

NOTE CEN/TR 15230[8] shall be considered in relation to size-selective sampling procedures.

Sampling equipment and the associated collection substrate shall be compatible with the intended method of analysis. In some recommended or official methods, the sampling instrument is specified. Changes to official or recommended methods shall be validated to ensure they are appropriate and comparable.

7.2 Sampler

A specific sampler shall sample aerosol in accordance with the definition for respirable size-selective penetration given in ISO 7708, except where local regulation requires otherwise, and have a performance as required by EN 13205. Conventions for particle deposition⁽⁹⁾ may also be considered. All connections included in the sampling trains shall be checked prior to use to avoid leaks.

Because of the range of sampler types available, practical aspects of their use require consideration. One of the most important is the flow rate required, both with respect to the size, mass, and cost of pump needed, the preferred sampling time period, as well as with respect to the Limit of Detection (LOD) and Limit of Quantitation (LOQ), but conversely also the potential for overloading. There may be issues specific to certain samplers such as particles adhering to walls, orientation to the wind, ability to clean and re-use or even complexity of calibration and checking the flow rates. Refer to [Annex E](#) for information on the differences in performance of samplers. Consult the product information before use.

NOTE The most commonly used sampler for respirable size-selection is the miniature cyclone, and a wide variety of types are available. Many of these are designed for connection to a housing containing a filter to collect the separated, respirable particles. In recent years it has been shown that particles passing through the cyclone which should then be deposited on the filter can be attracted instead to the walls of the housing if it is made of non-conducting plastic^[10]. These particles are intended to be part of the sample but may not be included if only the filter catch is analysed. It is recommended to use conductive (static-dissipative) plastic cassettes for the purpose of housing filters in place of non-conductive plastic cassettes.

7.3 Filters and foams

Filters shall be of a diameter suitable for use in the selected sampler. The filter type selected for sampling shall have a filtration efficiency of not less than 95 % over the range of particle sizes to be collected (1 µm to 10 µm)^[11]. Most polymer membrane filters, except polycarbonate filters, regardless of the nominal pore size, exhibit this characteristic over most flow-rates. Foams are generally associated with a specific sampler and only the type of foams supplied for the sampler shall be used. A different type of filter than the foam or filter used for sampling may be preferred for analysis. Re-deposition of a collected foam or filter sample on another filter or other medium is generally referred to as an indirect analysis, rather than a direct analysis where the sampling filter is directly inserted in the analytical instrumentation. While it is possible to re-deposit the sample on to a different substrate from that used for sampling, this step may add to the uncertainty budget of the procedure. The advantage or disadvantage of re-deposition should be balanced against other considerations (evenness and thickness of deposit, removal of interfering species, etc.). Not all filters are suitable for all analytical methods. For example, silver membrane filters are suitable for X-ray diffraction (XRD) analysis but not infrared

(IR) spectroscopy. Polyvinylchloride (PVC), polypropylene, or PVC-acrylonitrile co-polymer filters have suitable IR characteristics^[12], but a potassium bromide bead can also be created for indirect analysis^[13]. Filter material may degrade if the sampling environment is particularly humid.

7.4 Sampling flow measurement devices and pumps

The device used to measure the flow through a sampling pump shall have its calibration traceable to national or international standards through an organization accredited for the purpose. Float-type flow meters (rotameters) are not traceable to national or international standards and can only be used to indicate the possibility that flow rates have deviated from the allowed range. Corrections to the flow rate readings from rotameters may be necessary to take account of changes in air density resulting from conditions of temperature and pressure and relative humidity which differ from those of the initial calibration of the rotameter. The reading of a rotameter used for this purpose shall be checked prior to use with a calibrator traceable to primary standards. Extreme conditions of temperature and pressure can have an influence on volumetric flow meters, and they should be calibrated to provide accurate measurements at the worksite conditions. Mass flow meters require correction for air density. Corrections are only necessary when the conditions at the site differ substantially from those where the flow rate check was originally made (e.g. using the universal gas law, a temperature change of 10 °C would change the volume sampled by about 3 %, but an altitude change of several thousand metres would have a much more profound effect). If the flow rate has been set away from the sampling site, a flow rate check of the sampling train should be made close to the site of the working operation to ensure the pump is functioning correctly and any necessary adjustments are made prior to sampling.

The battery for the sampling pump should be fully charged prior to the sampling exercise. When taking personal samples, sampling pumps worn by personnel should not impede normal work activity. Sampling pumps shall comply with the provisions of ISO 13137, or equivalent performance standard. Most pumps have an adjustable flow-rate and a means for setting a specific flow-rate. The sampler requires operation at a specific (nominal) flow rate to meet specified size-selective criteria in collecting a respirable size fraction. Excessive pulsation in flow will cause deviations from the required performance^[14], therefore pumps for this purpose shall meet the requirements of the pulsation test in ISO 13137. Pumps shall maintain the nominal flow rate to within ± 5 % throughout the sampling period, and thus shall incorporate a flow fault indicator, or have their flow-rate checked frequently throughout the sampling period to detect flow deviations. Prior to sampling, the flow rate value shall be set as close as possible to the nominal and in any case within a range of ± 5 % of nominal using a sampler reserved for this purpose, which is replaced by a fresh sampler for sampling. The pre-sampling flow rate shall be recorded. If flow-rate through the sampler is checked at regular intervals during the sampling period by means of a rotameter, this device does not require a calibration traceable to national or international standards. If the flow rate during sampling is not within ± 5 % of the nominal value, the person recording the flow rate measurement shall inform the person responsible for communicating the results to note the observation in the final report. Flow-rates can fall below 95% of the nominal value when sampling very high concentrations, and the pressure drop resulting from build-up of dust on the filter exceeds the flow compensation capability of the pump. The sampler is removed from the pump at the end of the sampling period. The flow-rate through the pump and the sampler used to set the pre-sampling flow-rate shall be measured post-sampling and reported. When the post-sampling flow-rate measurement is within 5% of the pre-sampling value either the pre-sampling value, the average value, or the nominal value may be used to calculate the concentration, according to the standard procedure in use^[15]. Where the post-sampling flow rate measurement is not within 5% of the nominal value, the user of the results must consider that the size-selective performance of the sampler may have been compromised. Therefore, the results may have no validity, even if only the low or high flow rate value is used for calculating concentration.

7.5 Sampling period

7.5.1 Select a sampling period that is appropriate for the measurement task but ensure that it is long enough to enable RCS to be determined with acceptable uncertainty at levels of industrial hygiene significance. Many OELVs for RCS are couched in terms of an 8-hour shift average, and so sample numbers and/or sampling times should be sufficient to ensure appropriate coverage. If work-shifts are longer and

exposure continues, longer sampling periods may be necessary, together with consequent adjustment of the OELV.

NOTE If the minimum sampling time required for analytical sensitivity is too long, consider the possibility of using a sampler designed to be used at a higher flow rate or modifying the analytical procedure to obtain greater sensitivity.

7.5.2 When high concentrations of airborne particles are anticipated, the sampling period may be reduced to not risk overloading the filter with particles (with subsequent additional samples as necessary where compliance with an OELV is being tested). While many published methods caution not to exceed 2 mg total deposit, this is a very conservative recommendation as loadings up to 4 mg have been circulated in round-robin studies without significant loss of sample^[16]. However, it is also necessary to consider the matrix absorption effects from sample loading on the maximum allowable value. Table 4 of the Reference ^[17] shows that in a “worst case” standard sample, which was defined as 5% quartz in a matrix with an x-ray absorption coefficient of 1000 (hematite), the critical value where deviation from linear XRD calibration is 20% is 2 mg on a 2,1 cm filter diameter, and so above this loading appropriate corrections should be applied to account for the non-linearity. If the sample is 80% quartz the deviation will be much less (see figure 17), and, since the effect also depends on the mass absorption coefficient of the interferent, a “typical” coefficient of 40 (with feldspar or calcite) would lead to a critical value for 80% quartz of 2,4 mg.cm⁻². Over a 2,1 cm diameter filter this is greater than 4 mg loading before non-linearity.

7.5.3 When concentrations of RCS lower than 0,1 mg.m⁻³ are anticipated, or if measurements are being made to determine concentrations during short tasks or event, consider that insufficient sample for quantitation may be collected if the sampling flow rate is low. It may be necessary to consider using a sampler that operates at a higher flow rate for appropriate sensitivity.

7.5.4 Matrix effects in both IR and XRD procedures limit the possibility of analysis when RCS makes up less than 1% of the collected dust. Therefore, when concentrations of dust are high, and the silica content is low, there may be no possibility of confirming the presence of RCS around an OELV.

NOTE For example, if the respirable dust concentration is greater than 2,5 mg.m⁻³, it may not be possible to detect RCS at a “1%” level of 0,025 mg.m⁻³, and, therefore, there can be no confidence of compliance with an OELV of 0,025 mg.m⁻³ when the analytical result for RCS is “none detected”. Thus, there is value in measuring the aerosol collected gravimetrically to be able to detect and warn clients of this situation. Removal of matrix, e.g. by acid treatment or heating, may be used to decrease the quantity of aerosol and improve the ability to detect lower percentages of RCS in respirable dust. However, even with sample reduction it may still be difficult to confirm compliance where there is no detection. For example, if the dust concentration is 5 mg.m⁻³ and 50% is calcite, removing the calcite only leads to the same situation as described above. Therefore, it is advisable to re-weigh samples after reduction to detect this situation.

7.6 Transportation

At most normal loadings (< 4 mg), the sample (of respirable dust) is safely contained on the filters specified in [Clause 7.3](#) and is not lost if the sample is handled with care. Test samples containing up to 4 mg of borax on glass fibre and PVC membrane filters have been sent through postal systems without significant losses in material from the filter^[16].

NOTE For indirect methods the provision of sample losses in the cassette can be addressed during the sample preparation stage. However, this may cause a bias for direct-on-filter analysis.

8 Procedures

8.1 Handling of filter cassettes

The user should refer to the manufacturer's handling instructions. For a cyclone selector, the respirable size selectors should be stored and opened with the grit pot for the non-respirable particles kept vertically below the cassette. Ensure that filter cassettes are firmly closed. Care should be taken

upon opening the filter cassette to avoid loss of dust. The condition of the cassette should be visually checked and any deposition of dust on the walls of the cassette should be noted, if it is not intended to be analysed by procedure. However, fine dust particles are virtually invisible against most cassette materials, so that non-visibility cannot be taken as proof of absence of dust deposits. Static dissipative conductive cassettes can be useful in minimising wall deposition of dust^[10].

8.2 Method validation

Laboratories shall use only published validated methods, or methods proven by validation to have comparable or better performance characteristics when compared with published methods. A Eurachem Guide^[18] describes the method validation process. If deviations from a standard method are made, then the laboratory shall prove that the changes give comparable results and note the modifications when the results are reported.

8.3 Calibration of the analysis

Where the uncertainty in a measurement contributes substantially to the expanded uncertainty, such measurements shall be traceable to national or international Standards. Weighing low microgram levels ($< 200 \mu\text{g}$) shall be done on a balance with a resolution of $1 \mu\text{g}$. This also requires the use of E2 class certified check masses to verify the balance calibration. Humidity and electrostatic effects may affect the stability of the weighing (see ISO 15767). Weighing procedures for filters are given in ISO 15767.

Good practices use not less than six concentration levels of calibration test samples in order to reduce the standard error of the regression line to an appropriate level and use three replicates at each concentration level. Since many standard preparation procedures involve serial dilution from a single stock suspension, consider using two independently made stock solutions for verification. To reduce the uncertainty of the calibration line, at low measurement levels, some direct on-filter analysis methods for RCS recommend 30 calibration test samples because of the difficulty of producing replicates. The calibration test samples need to be equally spread across the analytical range to avoid a regression or other calibration model from being unduly weighted by isolated responses that may lead to significant differences between results. Where calibration produces data with standard deviation varying with mass of RCS (heteroscedastic), a weighted regression may be more appropriate for analysis. The calibration should be tested against some known sample such as a proficiency testing or spiked quality control sample.

To minimise variability, the preparation of the calibration standards needs to be fit for its intended purpose. For direct on-filter methods, the procedure for the preparation of the standards should match the sample collection methods. For deposition methods, the procedure for the preparation of the calibration standards should match the sample preparation methods.

The response from both XRD and IR analysis techniques is sensitive to the distribution of the size of the particles on the surface of the analysis filter and different standards may have a slightly different distribution of particle sizes, which may lead to differences in results between laboratories. Measurement of peak area shows less variability with particle size for XRD, because, as the median particle size decreases, the peak shape broadens, which decreases the height. Peak height is usually measured for IR analysis.

If the calibration dust used in a laboratory is not a certified reference material (CRM) or a working standard with a known amount of RCS, then the response of the calibration dust should be compared with these materials to determine any potential bias. It should be noted that even CRMs can have different crystallinity which can lead to different results when used to calibrate analysis of a sample. If the absorbance or diffraction peak profile is outside the repeatability precision of the measurement and is considered significant at the 95 % confidence level, a correction factor should be applied to the final result or calibration. The result reported to the customer should be corrected for purity of the dust standard.

For example, if XRD is used and the difference between the area result for a sample of the bulk reference material is greater or less than 2,26 (Student *t*-distribution for nine degrees of freedom), standard