
**Road vehicles — Liquefied natural
gas (LNG) integrated low pressure
refuelling and venting connector —
1,8 MPa connector**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TS 21104:2019](https://standards.iteh.ai/catalog/standards/sist/00122587-82f7-4c1c-9b66-1de892183a5e/iso-ts-21104-2019)

<https://standards.iteh.ai/catalog/standards/sist/00122587-82f7-4c1c-9b66-1de892183a5e/iso-ts-21104-2019>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/TS 21104:2019

<https://standards.iteh.ai/catalog/standards/sist/00122587-82f7-4c1c-9b66-1de892183a5e/iso-ts-21104-2019>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General construction requirements	3
4.1 Design	3
4.1.1 Spillage	3
4.1.2 Positive locking device	3
4.1.3 Design cycle life	3
4.2 Pressure rating	3
4.3 Working temperature	3
4.4 Materials	3
4.4.1 Corrosion protection	4
4.4.2 Material of the bodies of the receptacle and of the nozzle	4
4.5 Operation	4
4.6 Sealing exchange	4
4.7 Installation	4
5 Nozzles	4
5.1 Venting depressurization	4
5.2 Identification	4
6 Standard receptacle dimensions	4
7 Receptacle	5
7.1 Cycle life	5
7.2 Design	5
7.3 Protective cap	5
7.4 Mounting	5
8 Instructions	6
9 Marking	6
9.1 Clarity	6
9.2 Manufacturer and International Standard information	6
9.3 Date of manufacture	6
9.3.1 Additional marking	6
10 Tests	7
10.1 General requirements	7
10.2 Test program	7
10.3 User-interface	7
10.3.1 Positive locking	7
10.3.2 Safe disconnection	8
10.3.3 Manual force in at $T = + 20 \text{ °C} \pm 5 \text{ °C}$	8
10.3.4 Manual force at high humidity	8
10.4 Impact resistance of a nozzle	8
10.5 Abnormal loads	9
10.5.1 General	9
10.5.2 Test in the unpressurized condition	10
10.5.3 Test in pressurized condition	10
10.6 Leak test	10
10.6.1 Hydrostatic pressure test	10
10.6.2 Leakage test	11
10.7 Durability of the device (cycle life)	11
10.7.1 Concept of the test of a device	11
10.7.2 Cycle definition	11

10.7.3	Test series	12
10.7.4	Exchange of seal of the nozzle and/or receptacle	12
10.8	Electrical conductivity	12
10.9	Corrosion resistance	12
10.10	Non-Destructive Examination (NDE)	12
Bibliography	14

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TS 21104:2019](https://standards.iteh.ai/catalog/standards/sist/00122587-82f7-4c1c-9b66-1de892183a5e/iso-ts-21104-2019)

<https://standards.iteh.ai/catalog/standards/sist/00122587-82f7-4c1c-9b66-1de892183a5e/iso-ts-21104-2019>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road Vehicles*, Subcommittee SC 41, *Specific aspects for gaseous fuels*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/TS 21104:2019

<https://standards.iteh.ai/catalog/standards/sist/00122587-82f7-4c1c-9b66-1de892183a5e/iso-ts-21104-2019>

Road vehicles — Liquefied natural gas (LNG) integrated low pressure refuelling and venting connector — 1,8 MPa connector

1 Scope

This document specifies liquefied natural gas (LNG) refuelling nozzles and receptacles constructed entirely of new and unused parts and materials for road vehicles powered by LNG.

An LNG refuelling connector consists of, as applicable, the receptacle and the nozzle. This document is applicable only to such devices designed for a working pressure of 1,8 MPa to those using LNG as vehicle fuel and having standardized mating components.

NOTE All references to pressures in this document are considered gauge pressures, unless otherwise specified.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 15500-2, *Road vehicles — Compressed natural gas (CNG) fuel system components — Part 2: Performance and general test methods* ISO/TS 21104:2019

ISO 19723 (all parts), *Road vehicles — Liquefied natural gas (LNG) fuel systems*
<https://standards.iteh.ai/catalog/standards/sist/00122587-82f7-4c1c-9b66-1de892183a5c/iso-ts-21104-2019>

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

check valve

part of the receptacle, or of the nozzle, mounted inside which prevents return flow or venting of fuel after the nozzle was disconnected from the receptacle

3.2

cycle life

number of refuelling cycles, as specified in this document, which the component can withstand without leak or without another fail of function

3.3

device

nozzle or receptacle

3.4

dry air

air with moisture content such that the dew point of the air at the required test pressure is at least 11 °C below the ambient test temperature

3.5

liquefied natural gas

LNG

cryogenic liquid produced by reducing the temperature of natural gas to about -162 °C at atmospheric pressure (depending on LNG composition)

3.6

LNG refuelling connector

joined assembly of *LNG refuelling nozzle* (3.7) and *LNG refuelling receptacle* (3.8) for refuelling and venting via one channel

3.7

LNG refuelling nozzle

device (3.3) which permits quick connection and disconnection of fuel supply hose to the LNG receptacle in a safe manner

3.8

LNG refuelling receptacle

device (3.3) connected to a vehicle or storage system which receives the *LNG refuelling nozzle* (3.7) and permits safe transfer of fuel

3.9

maximum service pressure

maximum pressure of the fuel delivered by the fuelling station

3.10

working pressure

maximum allowable pressure

maximum pressure that an *LNG refuelling connector* (3.6) can be expected to withstand in actual service

iTeh STANDARD PREVIEW

(standards.iteh.ai)

ISO/TS 21104:2019

<https://standards.iteh.ai/catalog/standards/sist/00122587-82f7-4c1c-9b66-1de892183a5e/iso-ts-21104-2019>

3.11

hydrostatic pressure

pressure to which a component is taken to verify the structural strength of the component

3.12

high humidity weather conditions

weather condition with 95 % to 100 % relative humidity at $T = + 20$ °C

3.13

poppet

movable closing part of the *check valve* (3.1)

3.14

positive locking device

feature which requires actuation of an interlocking mechanism to allow connection/disconnection of the nozzle from the receptacle

3.15

vapour spillage space

dead volume in the LNG refuelling connector between the nozzle and the receptacle measured with trapped water

3.16**non-sparking materials**

materials that do not contain, by mass, more than: 7,5 % in total of magnesium, titanium and zirconium

Note 1 to entry: According to IEC EN 60079-0:2011 Clause 8.3 for EPL Gb.

4 General construction requirements**4.1 Design**

LNG nozzles and receptacles shall be:

- designed to minimize the possibility of incorrect assembly;
- designed to be secure against displacement, distortion or other damage;
- constructed to maintain operational integrity under normal and reasonable conditions of handling and usage;
- able to ensure safe transfer and leak-tight connection at high humidity weather conditions (e.g. freezing or ice crystal damage).

4.1.1 Spillage

LNG nozzles and receptacles shall be designed with a vapour spillage space less than 1 cm³.

4.1.2 Positive locking device (standards.iteh.ai)

It shall not be possible, without first actuating the locking release mechanism, to disconnect with normal actuating forces (maximum 100 N or 3 Nm). Under unsafe conditions when an uncontrolled release of LNG can happen which may cause damage to the user and/or the environment.

4.1.3 Design cycle life

All receptacles shall be tested to a durability test for 10 000 coupling cycles for compliance with this document. In addition, all nozzles shall be tested to a durability test for 20 000 cycles.

NOTE 10 000 cycles means one fill per day for 27 years.

4.2 Pressure rating

Working pressure	1,8 MPa
Maximum service pressure	1,5 MPa
Hydrostatic test pressure	2.5 times working pressure

4.3 Working temperature

Working temperature range: -162 °C to +85 °C.

4.4 Materials

LNG nozzles and receptacles shall be manufactured of materials suitable and compatible for use with LNG at the pressure and the temperature ranges to which they will be subjected.

4.4.1 Corrosion protection

Corrosion-resistant materials shall be used (see [10.9](#)). Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in contact with each other (analog ISO 15500-2).

4.4.2 Material of the bodies of the receptacle and of the nozzle

Material of the bodies of the pressure containing housings shall be:

- a) suitable for the working temperature range,
- b) conductive [only conductive materials that comply with the electric conductivity test (see [10.8](#))] and
- c) non-sparking according to [3.16](#).

4.5 Operation

LNG nozzles and receptacles shall be so designed as to be operated without the use of tools and excessive force for connecting and disconnecting (see [7.2](#)).

4.6 Sealing exchange

Design of a device and its check valve sealing shall make possible service of the check valve sealing from the front side using suitable jig and related tools.

4.7 Installation

The receptacle shall be installed according to ISO 19723-1 and ISO 19723-2.

5 Nozzles

iTeh STANDARD PREVIEW
(standards.iteh.ai)
[ISO/TS 21104:2019](https://standards.iteh.ai/catalog/standards/sist/00122587-82f7-4c1c-9b66-1de892183a5e/iso-ts-21104-2019)
<https://standards.iteh.ai/catalog/standards/sist/00122587-82f7-4c1c-9b66-1de892183a5e/iso-ts-21104-2019>

5.1 Venting depressurization


Venting depressurization of all nozzle types is required prior to disconnection.

5.2 Identification

The nozzle shall bear a marking in accordance with [Clause 9](#), if necessary, indicating the direction of the open and shut off operation of the actuating mechanism.

6 Standard receptacle dimensions

The receptacle shall comply with the dimensions, stroke and forces shown in [Figure 1](#).

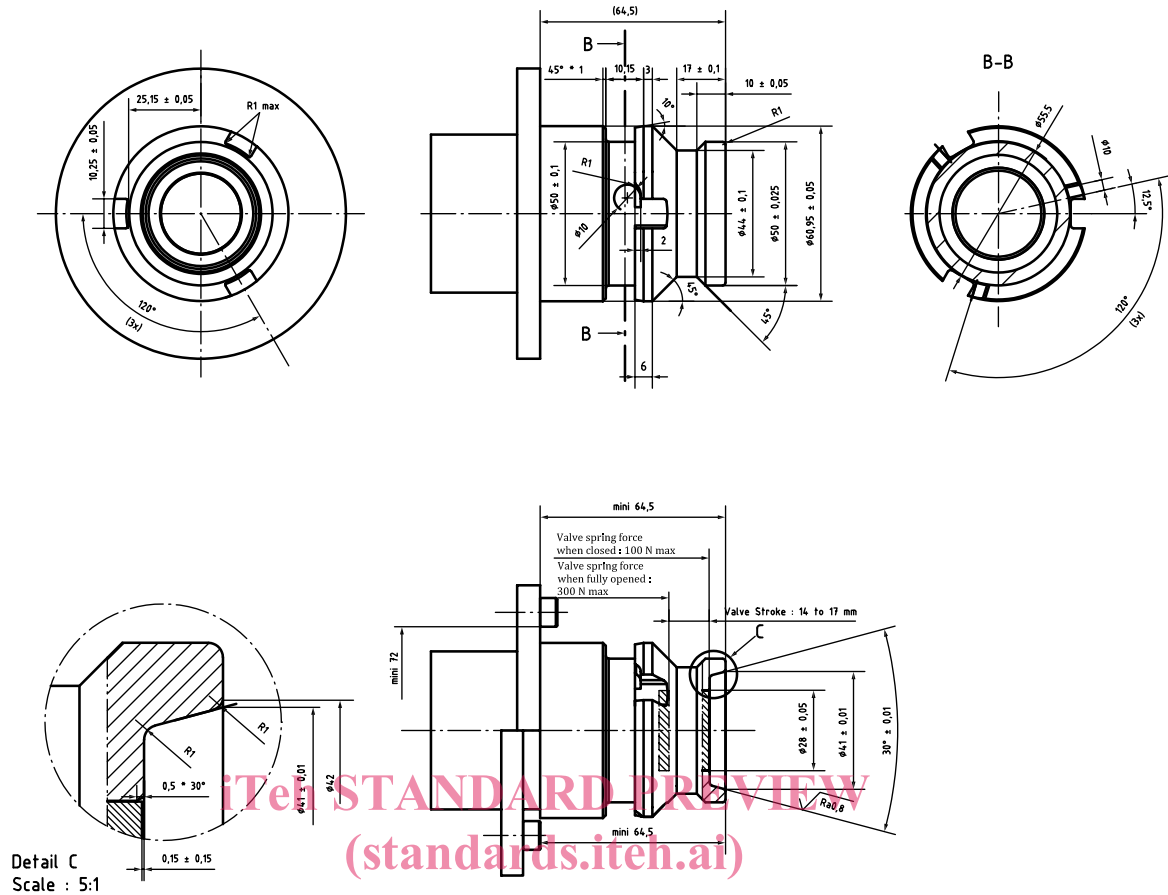

ISO/TS 21104:2019
Figure 1 – Dimensions of the receptacle
<https://standards.iteh.ai/catalog/standards/sis/00122587-8217-461c-9666-1de892183a5e/iso-ts-21104-2019>

7 Receptacle

7.1 Cycle life

Receptacle shall have a cycle life as specified in [4.1](#).

7.2 Design

The receptacle shall have one or more independent check valves mounted inside its body to prevent the escape of gas.

7.3 Protective cap

A receptacle manufacturer validated cap or equivalent design feature shall be provided to prevent dust, moisture, and other foreign debris from entering the receptacle. The cap shall allow small gas venting originated by warming the cold gas inside or a minor leak of the receptacle poppet. The cap shall be marked by an undeletable writing of “LNG ONLY”.

7.4 Mounting

The receptacle shall have provisions to be firmly attached to the vehicle and shall comply with applicable abnormal load tests (see [10.5](#)).