



**SLOVENSKI STANDARD**  
**oSIST prEN 16602-60-14:2020**

**01-februar-2020**

---

**Zagotavljanje varnih proizvodov v vesoljski tehniki - Postopek obnovitve uporabnosti - Komponente EEE**

Space product assurance - Relifing procedure - EEE components

Raumfahrtproduktsicherung - Wiederbelebungsprozeduren für EEE-Komponenten

Assurance produit des projets spatiaux - Procédure de déstockage - Composants EEE

**Ta slovenski standard je istoveten z: prEN 16602-60-14**

---

**ICS:**

49.140 Vesoljski sistemi in operacije Space systems and operations

**oSIST prEN 16602-60-14:2020**

**en,fr,de**



EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM

**DRAFT**  
**prEN 16602-60-14**

October 2019

ICS 49.140

Will supersede EN 16602-60-14:2014

English version

## Space product assurance - Relifing procedure - EEE components

Assurance produit des projets spatiaux - Procédure de  
déstockage - Composants EEE

Raumfahrtproduktsicherung -  
Wiederbelebungsprozeduren für EEE-Komponenten

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/CLC/JTC 5.


If this draft becomes a European Standard, CEN and CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN and CENELEC in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN and CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN and CENELEC members are the national standards bodies and national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation. Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

**Warning** : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.

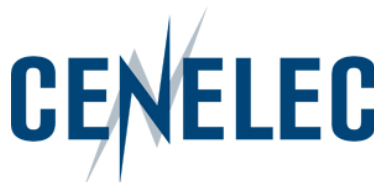

**CEN-CENELEC Management Centre:**  
**Rue de la Science 23, B-1040 Brussels**

## Table of contents

<b>European Foreword</b> .....	<b>4</b>
<b>1 Scope</b> .....	<b>5</b>
<b>2 Normative references</b> .....	<b>6</b>
<b>3 Terms, definitions and abbreviated terms</b> .....	<b>7</b>
3.1 Terms from other standards.....	7
3.2 Terms specific to the present standard .....	7
3.3 Abbreviated terms.....	10
3.4 Symbols.....	11
<b>4 Environmental parameters for handling and storage for Class 1 to Class 3 programmes</b> .....	<b>12</b>
4.1 General rules and requirements.....	12
4.1.1 <<deleted>>.....	12
4.1.2 Procedures .....	12
4.1.3 Storage area and storage zone .....	12
4.1.4 Cleanliness .....	12
4.1.5 ESD protection.....	13
4.1.6 Packing – Packaging – Handling.....	13
4.1.7 Quality assurance requirements for storage areas .....	13
4.2 Storage conditions .....	13
4.2.1 Air .....	13
4.2.2 Temperature .....	13
4.2.3 Relative humidity (RH) .....	13
4.2.4 Container .....	14
<b>5 Timing parameters for Class 1 to Class 3 programmes</b> .....	<b>15</b>
<b>6 Control parameters for Class 1 and Class 2 programmes</b> .....	<b>17</b>
6.1 Test requirements.....	17
6.1.1 Requirements per EEE parts family: .....	17
6.1.2 <<deleted>>.....	21
6.1.3 Electrical testing .....	21

6.1.4	External visual inspection.....	22
6.1.5	Seal test.....	22
6.2	Nonconformance .....	22
6.3	Relifing datecode .....	22
6.4	Relifing report .....	23
6.5	Certificate of Conformity .....	23
<b>7</b>	<b>Control parameters for Class 3 programmes.....</b>	<b>24</b>
7.1	Test requirements.....	24
7.1.1	Requirements per EEE parts family .....	24
7.1.2	Electrical testing .....	26
7.1.3	External visual inspection.....	26
7.2	Nonconformance .....	26
7.3	Relifing datecode .....	26
7.4	Relifing report .....	27
7.5	Certificate of Conformity .....	27
<b>Annex A</b>	<b>(normative) &lt;&lt;deleted and recreated as informative Annex C&gt;&gt;.....</b>	<b>28</b>
<b>Annex B</b>	<b>(informative) &lt;&lt;deleted&gt;.....</b>	<b>29</b>
<b>Annex C</b>	<b>(informative) Guidelines for a Relifing report.....</b>	<b>30</b>
<b>Bibliography</b> .....		<b>32</b>
<b>Figures</b>		
	Figure C-1 : Example of a relifing traveller sheet.....	31
<b>Tables</b>		
	Table 5-1: Timing parameters.....	16
	Table 6-1: Control parameters and detailed application of categories.....	19
	Table 7-1: Control parameters and detailed application of categories for Class 3 programmes.....	25

## European Foreword

---

This document (prEN 16602-60-14:2014-update) has been prepared by Technical Committee CEN/CLC/TC 5 "Space", the secretariat of which is held by DIN (Germany).

This document (prEN 16602-60-14:2014-update) originates from ECSS-Q-ST-60-14C Rev.1.

This document is currently submitted to the ENQUIRY.

This document will supersede EN 16602-60-14:2014.

The main changes with respect to EN 16602-60-14:2014 are:

- Creation of two relifing flows: one covering Class 1 and Class 2 components and the other covering Class 3 components
- Harmonization with EN 16602-60:2015 (based on ECSS-Q-ST-60C Rev.2)
- Introduction of the applicability of the relifing requirements to commercial components
- Change of timing requirements for relifing (from 7+3 to 7+4+4 years) increasing the maximum elapsed time between date code and time of mounting from 10 to 15 years
- Transformation of normative Annex A "Relifing report - DRD" by into informative Annex C "Guidelines for a Relifing report"
- Deletion of informative Annex B "ESD".

This document has been developed to cover specifically space systems and will therefore have precedence over any EN covering the same scope but with a wider do-main of applicability (e.g. : aerospace).

# 1 Scope

---

This standard specifies the requirements, also known as “relifing requirements”, for the planned, intentional storage, control, and removal from storage of electronic, electrical and electromechanical parts which are intended to be used for space applications.

This standard covers the relifing of all components as defined by ECSS-Q-ST-60 and ECSS-Q-ST-60-13.

The relifing process is a lot quality control activity. The inspections and tests defined do not constitute an up-screening or up-grading of components to a higher level of quality than procured to.

In line with ECSS-Q-ST-60, this standard differentiates between classes of components through different sets of standardization requirements.

The classes provide levels of trade-off between assurance and risk. The highest assurance and lowest risk is provided by Class 1 and the lowest assurance and highest risk by Class 3. Procurement costs are typically highest for Class 1 and lowest for Class 3. Mitigation and other engineering measures can decrease the total cost of ownership differences between the three classes. The project objectives, definition and constraints determine which class or classes of components are appropriate to be utilised within the system and subsystems.

- Class 1 components are described in Clause 4, 5 and 6
- Class 2 components are described in Clause 4, 5 and 6
- Class 3 components are described in Clause 4, 5 and 7

The requirements of this document apply to all parties involved at all levels in the integration of EEE components into space segment hardware and launchers.

This standard is applicable to all EEE parts covered by ECSS-Q-ST-60 and used in space programmes.

This standard is not applicable to dice.

This standard may be tailored for the specific characteristic and constraints of a space project in conformance with ECSS-S-ST-00.

## Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this ECSS Standard. For dated references, subsequent amendments to, or revision of any of these publications do not apply. However, parties to agreements based on this ECSS Standard are encouraged to investigate the possibility of applying the more recent editions of the normative documents indicated below. For undated references, the latest edition of the publication referred to applies.

EN reference	Reference in text	Title
EN 16601-00-01	ECSS-S-ST-00-01	ECSS system – Glossary of terms
EN 16602-10-09	ECSS-Q-ST-10-09	Space product assurance – Nonconformance control system
EN 16602-60	ECSS-Q-ST-60	Space product assurance – Electrical, electronic and electromechanical (EEE) components
EN 16602-60-13	ECSS-Q-ST-60-13	Space product assurance – Commercial electrical, electronic and electromechanical (EEE) components
EN 16602-70-01	ECSS-Q-ST-70-01	Space product assurance – Cleanliness and contamination control
	ESCC 24900	Minimum Requirements for Controlling Environmental Contamination of Components
	IPC/JEDEC J-STD-033D April 2018	Standard for Handling, Packing, Shipping and Use of Moisture/ re-flow Sensitive Surface Mount Devices
	ESCC 20600	Preservation, Packaging and dispatch of ESCC Electronic Components
	ANSI ASQ Z1.4-2003 Revision 2008	Sampling procedures and tables for inspection by attributes



## 3

## Terms, definitions and abbreviated terms

---

### 3.1 Terms from other standards

- a. For the purpose of this Standard, the terms and definitions from ECSS-S-ST-00-01 apply, in particular for the following terms:
1. clean area
  2. cleanliness
  3. cleanroom
  4. component
  5. conformance
  6. contamination
  7. dependability
  8. environment
  9. inspection
  10. performance
  11. relieving
  12. traceability

### 3.2 Terms specific to the present standard

#### 3.2.1 antistatic material

material that minimizes the generation of static charges

NOTE 1 This term refers to the reduction of triboelectric charge generation.

NOTE 2 This property is not dependent upon material resistivity.

#### 3.2.2 conductive material

<CONTEXT: ESD protection> material with the following characteristics:

- surface conductive type: materials with a surface resistivity less than  $10^5 \Omega/\square$ .

## prEN 16602-60-14:2019 (E)

- volume conductive type: materials with a volume resistivity less than  $10^4 \Omega\text{-cm}$ .

**3.2.3 container**

receptacle which holds, restrains or encloses an item for the purpose of storage or transportation

**3.2.4 (original) date code**

code used by the EEE part manufacturer at assembly step that indicates the production date

NOTE 1 Generally four-figure codes; two for the year and two for the week.

NOTE 2 Special lot number can also identify the date code.

**3.2.5 (relifing) date code:**

code indicating the date an item is submitted to the last step of the relifing sequence

NOTE Four-figure code, two for the year and two for the week.

**3.2.6 dissipative material**

<CONTEXT: ESD protection> material with the following characteristics:

- surface conductive type: materials with a surface resistivity equal to or greater than  $10^5 \Omega/\square$  but less than  $10^{12} \Omega/\square$ .
- volume conductive type: materials with a volume resistivity equal to or greater than  $10^4 \Omega\text{-cm}$  but less than  $10^{11} \Omega\text{-cm}$ .

**3.2.7 electrostatic charge**

negative or positive electrical charge present on the material or item surface, at rest

**3.2.8 electrostatic discharge (ESD)**

transfer of electrostatic charge between objects at different potentials caused by direct contact or induced by an electrostatic field

**3.2.9 electrostatic discharge sensitive (ESDS)**

tendency of the performance of EEE parts to be affected or damaged by an ESD event

**3.2.10 ESD protected area**

area which is constructed and equipped with the necessary ESD protective materials, equipment, and procedures, to limit ESD voltages below the sensitivity level of ESDS items handled therein

**3.2.11 ESD protective material**

material with one or more of the following properties: limits the generation of electrostatic charge, dissipates electrostatic charge, and provides shielding from electric fields

**3.2.12 ESD protective packaging**

packaging with ESD protective materials to prevent ESD damage to ESDS items

**3.2.13 electrostatic shield**

barrier or enclosure that prevents or attenuates the penetration of an electric field

**3.2.14 handled or handling**

actions during which items are hand manipulated or machine processed

**3.2.15 identification**

application of appropriate markings to ensure that the identity of an item is unfailingly indicated after preservation and each stage of packing

**3.2.16 isolating material**

<CONTEXT: ESD protection> material not defined as conductive or dissipative are considered to be isolating

**3.2.17 package**

support used for enveloping, protecting or containing materials

NOTE Different types of packages are normally used:  
Primary, intermediate and final packages

**3.2.18 (primary) package**

container, envelope or wrap holding an individual item

**3.2.19 (intermediate) package**

container holding two or more primary packages

**3.2.20 (final) package**

container holding one or more intermediate packages, used for transportation of supplies to the orderer

**3.2.21 packaging**

operations consisting in the preparation of supplies for transit and delivery.

NOTE The term includes preservation, identification and packing

**3.2.22 packing**

operation by which supplies are placed in container or wrapped and placed in containers

## prEN 16602-60-14:2019 (E)

**3.2.23 particle**

unit of matter with observable length, width and thickness

NOTE A particle can be object of solid or liquid composition, or both, and generally between 0,001  $\mu\text{m}$  and 1000  $\mu\text{m}$  in size

**3.2.24 preservation**

cleaning of an item and the application of a suitable temporary protective, where necessary, to maintain the item in prime condition

**3.2.25 relifing procedures**

set of tests performed on an item previously stored to verify that its initial quality and reliability have not been affected by time

**3.2.26 storage area**

area in the storage site where EEE parts are stored and which contains one or more storage zones.

**3.2.27 storage long duration**

storage for which duration exceeds 3 years

**3.2.28 storage site**

geographical location where EEE parts are stored for a short, medium or long term period

NOTE For this site the requirements given in this standard apply: EEE parts manufacturer's premises, procurement Agency, EEE part user.

**3.2.29 storage zone**

defined space in which EEE parts are stored and which is equipped for the monitoring and the control of storage conditions.

**3.2.30 triboelectric effect**

generation of electrostatic charge on an object by rubbing or other type of contact.

**3.3 Abbreviated terms**

For the purpose of this Standard, the abbreviated terms from ECSS-S-ST-00-01 and the following apply:

Abbreviation	Meaning
ASIC	application specific integrated circuit
CCD	charge coupled device
CDM	charge device model
DPA	destructive physical analysis
DSP	digital signal processor