

FINAL  
DRAFT

INTERNATIONAL  
STANDARD

ISO/FDIS  
11298-4

ISO/TC 138/SC 8

Secretariat: JISC

Voting begins on:  
2020-12-23

Voting terminates on:  
2021-02-17

---

---

## Plastics piping systems for renovation of underground water supply networks —

### Part 4: Lining with cured-in-place pipes

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)  
*Systemes de canalisation en plastique pour la rénovation des réseaux  
enterrés d'alimentation en eau —  
Partie 4: Tubage continu par tubes polymérisés sur place*

[ISO/FDIS 11298-4](https://standards.iteh.ai/catalog/standards/sist/caff8bee-6bcb-435b-908a-46c8e534bfb4/iso-fdis-11298-4)

<https://standards.iteh.ai/catalog/standards/sist/caff8bee-6bcb-435b-908a-46c8e534bfb4/iso-fdis-11298-4>

**ISO/CEN PARALLEL PROCESSING**

---

---

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number  
ISO/FDIS 11298-4:2020(E)

© ISO 2020

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/FDIS 11298-4](https://standards.iteh.ai/catalog/standards/sist/eaff8bee-6bcb-435b-908a-46c8e534bfb4/iso-fdis-11298-4)  
<https://standards.iteh.ai/catalog/standards/sist/eaff8bee-6bcb-435b-908a-46c8e534bfb4/iso-fdis-11298-4>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
<b>Foreword</b> .....	<b>v</b>
<b>Introduction</b> .....	<b>vi</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>2</b>
3.1 General terms.....	2
3.2 Techniques.....	4
3.3 Characteristics.....	4
3.4 Materials.....	5
3.5 Product stages.....	5
3.6 Service conditions.....	5
<b>4 Symbols and abbreviated terms</b> .....	<b>5</b>
4.1 Symbols.....	5
4.2 Abbreviated terms.....	7
<b>5 Pipes at the “M” stage</b> .....	<b>7</b>
5.1 Materials.....	7
5.2 General characteristics.....	9
5.3 Material characteristics.....	9
5.4 Geometric characteristics.....	9
5.5 Mechanical characteristics.....	10
5.6 Physical characteristics.....	10
5.7 Jointing.....	10
5.8 Marking.....	10
<b>6 Fittings at the “M” stage</b> .....	<b>10</b>
<b>7 Ancillary components</b> .....	<b>10</b>
<b>8 Fitness for purpose of the installed lining system at the “I” stage</b> .....	<b>11</b>
8.1 Materials.....	11
8.2 General characteristics.....	11
8.3 Material characteristics.....	11
8.4 Geometric characteristics.....	12
8.4.1 General.....	12
8.4.2 CIPP wall structure.....	12
8.4.3 Wall thickness.....	12
8.5 Mechanical characteristics.....	12
8.5.1 Reference conditions for testing.....	12
8.5.2 Test requirements.....	12
8.6 Physical characteristics.....	16
8.7 Additional characteristics.....	16
8.7.1 Leak tightness of liner terminations.....	16
8.8 Sampling.....	17
<b>9 Installation practice</b> .....	<b>17</b>
9.1 Preparatory work.....	17
9.2 Storage, handling and transport of pipe components.....	17
9.3 Equipment.....	17
9.4 Installation.....	18
9.4.1 Environmental precautions.....	18
9.4.2 Installation procedures.....	18
9.4.3 Simulated installations.....	18
9.5 Process-related inspection and testing.....	19
9.6 Lining termination.....	19
9.7 Reconnections to existing pipeline system.....	19

9.8	Final inspection and testing.....	19
9.9	Documentation.....	19
<b>Annex A</b>	<b>(informative) CIPP components and their functions.....</b>	<b>20</b>
<b>Annex B</b>	<b>(normative) Cured-in-place pipes — Determination of short-term flexural properties.....</b>	<b>21</b>
<b>Annex C</b>	<b>(normative) Cured-in-place pipes — Determination of long-term flexural modulus under dry or wet conditions.....</b>	<b>31</b>
<b>Annex D</b>	<b>(normative) Cured-in-place pipes — Determination of long-term flexural strength under dry or wet conditions.....</b>	<b>35</b>
<b>Bibliography</b>	.....	<b>38</b>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/FDIS 11298-4](https://standards.iteh.ai/catalog/standards/sist/eaff8bee-6bcb-435b-908a-46c8e534bfb4/iso-fdis-11298-4)

<https://standards.iteh.ai/catalog/standards/sist/eaff8bee-6bcb-435b-908a-46c8e534bfb4/iso-fdis-11298-4>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 138, *Plastics pipes, fittings and valves for the transport of fluids*, Subcommittee SC 8, *Rehabilitation of pipelines systems*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 155, *Plastics piping systems and ducting systems*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

A list of all parts in the ISO 11298 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

This document is a part of a system standard for plastics piping systems of various materials used for renovation of existing pipelines in a specified application area. System standards for renovation dealing with the following applications are either available or under preparation:

- the ISO 11296 series, *Plastics piping systems for renovation of underground non-pressure drainage and sewerage networks*;
- the ISO 11297 series, *Plastics piping systems for renovation of underground drainage and sewerage networks under pressure*;
- the ISO 11298 series, *Plastics piping systems for renovation of underground water supply networks* (including this document);
- the ISO 11299 series, *Plastics piping systems for renovation of underground gas supply networks*.

These system standards are distinguished from those for conventionally installed plastics piping systems by the requirement to verify certain characteristics in the “as-installed” condition, after site processing. This is in addition to specifying requirements for plastics piping systems components “as manufactured”.

Each of the system standards comprises a:

- *Part 1: General*

and all applicable renovation technique family-related parts, which for water supply networks include or potentially include the following:

- *Part 2: Lining with continuous pipes*;
- *Part 3: Lining with close-fit pipes*;
- *Part 4: Lining with cured-in-place pipes* (this document);
- *Part 5: Lining with discrete pipes*;
- *Part 6: Lining with adhesive-backed hoses*;
- *Part 10: Lining with sprayed polymeric materials*;
- *Part 11: Lining with inserted hoses*.

The requirements for any given renovation technique family are specified in Part 1, applied in conjunction with the other relevant part. For example, ISO 11298-1 and this document together specify the requirements relating to lining with cured-in-place pipes. For complementary information, see ISO 11295. Not all technique families are pertinent to every area of application and this is reflected in the part numbers included in each System Standard.

A consistent structure of clause headings has been adopted for all parts of ISO 11298 to facilitate direct comparisons across renovation technique families.

[Figure 1](#) shows the common part and clause structure and the relationship between the ISO 11298 series and the system standards for other application areas.

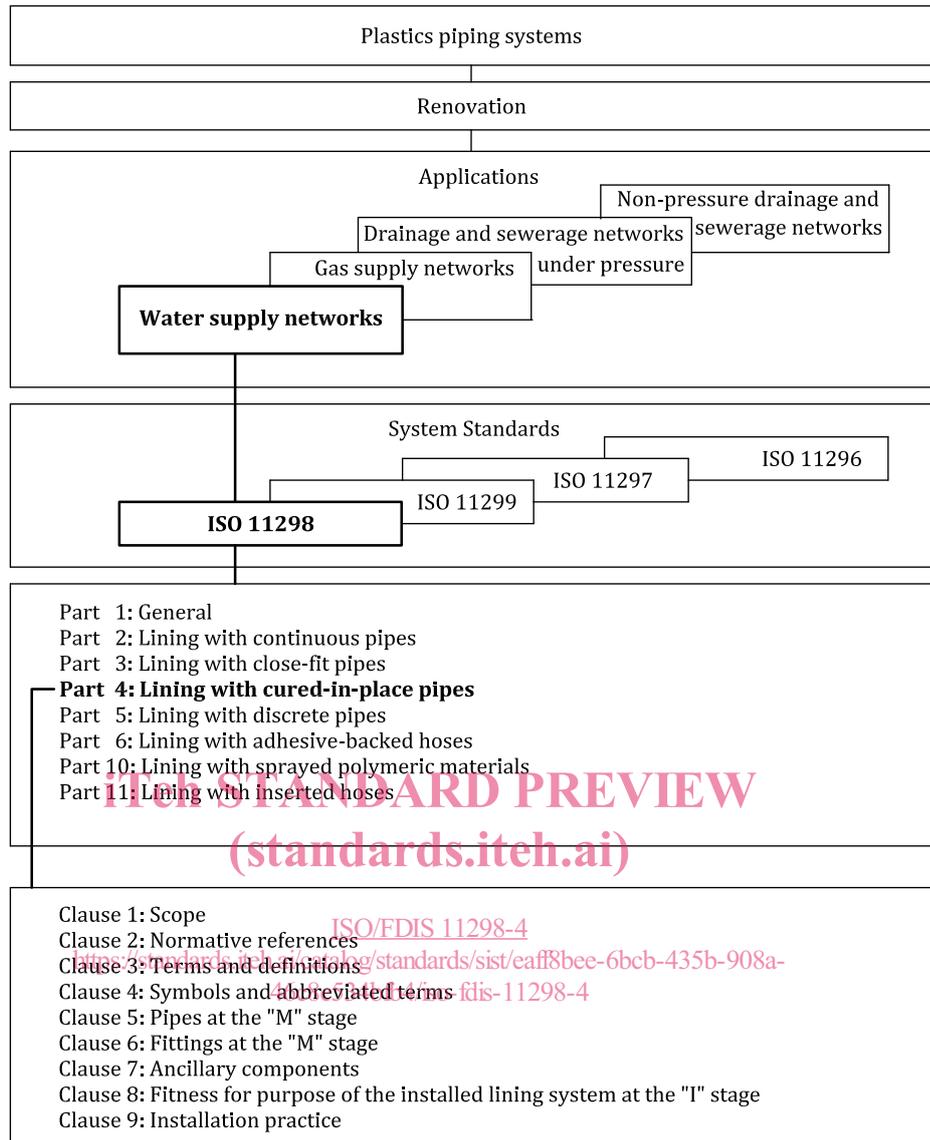


Figure 1 — Format of the renovation system standards

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO/FDIS 11298-4

<https://standards.iteh.ai/catalog/standards/sist/eaff8bee-6bcb-435b-908a-46c8e534bf4/iso-fdis-11298-4>

# Plastics piping systems for renovation of underground water supply networks —

## Part 4: Lining with cured-in-place pipes

### 1 Scope

This document, in conjunction with ISO 11298-1, specifies requirements and test methods for cured-in-place pipes and fittings used for the renovation of water supply networks, which transport water intended for human consumption, including raw water intake pipelines.

It applies to independent (fully structural, class A) and interactive (semi structural, class B) pressure pipe liners, as defined in ISO 11295, which do not rely on adhesion to the existing pipeline. It applies to the use of various thermosetting resin systems, in combination with compatible fibrous carrier materials, reinforcement, and other process-related plastics components (see 5.1).

It does not include requirements or test methods for resistance to cyclic loading or the pressure rating of CIPP liners where passing through bends, which are outside the scope of this document.

It is applicable to cured-in-place pipe lining systems intended to be used at a service temperature of up to 25 °C.

NOTE For applications operating at service temperatures greater than 25 °C, guidance on re-rating factors can be supplied by the system supplier.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 75-2:2013, *Plastics — Determination of temperature of deflection under load — Part 2: Plastics and ebonite*

ISO 178:2019, *Plastics — Determination of flexural properties*

ISO 899-2:2003, *Plastics — Determination of creep behaviour — Part 2: Flexural creep by three-point loading*

ISO 3126, *Plastics piping systems — Plastics components — Determination of dimensions*

ISO 7432, *Glass-reinforced thermosetting plastics (GRP) pipes and fittings — Test methods to prove the design of locked socket-and-spigot joints, including double-socket joints, with elastomeric seals*

ISO 7509, *Plastics piping systems — Glass-reinforced thermosetting plastics (GRP) pipes — Determination of time to failure under sustained internal pressure*

ISO 7685:2019, *Glass-reinforced thermosetting plastics (GRP) pipes — Determination of initial ring stiffness*

ISO 8513:2016, *Plastics piping systems — Glass-reinforced thermosetting plastics (GRP) pipes — Test methods for the determination of the initial longitudinal tensile strength*

ISO 8521:2020, *Plastics piping systems — Glass-reinforced thermosetting plastics (GRP) pipes — Test methods for the determination of the apparent initial circumferential tensile strength*

## ISO/FDIS 11298-4:2020(E)

ISO 8533, *Glass-reinforced thermosetting plastics (GRP) pipes and fittings — Test methods to prove the design of cemented or wrapped joints*

ISO 10468, *Glass-reinforced thermosetting plastics (GRP) pipes — Determination of the ring creep properties under wet or dry conditions*

ISO 10639:2017, *Plastics piping systems for pressure and non-pressure water supply — Glass-reinforced thermosetting plastics (GRP) systems based on unsaturated polyester (UP) resin*

ISO 10928:2016, *Plastics piping systems — Glass-reinforced thermosetting plastics (GRP) pipes and fittings — Methods for regression analysis and their use*

ISO 11295:2017, *Classification and information on design and applications of plastics piping systems used for renovation and replacement*

ISO 11298-1:2018, *Plastics piping systems for renovation of underground water supply networks — Part 1: General*

ISO 13002, *Carbon fibre — Designation system for filament yarns*

ISO 14125:1998, *Fibre-reinforced plastic composites — Determination of flexural properties*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11298-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <http://www.electropedia.org/>

<https://standards.iteh.ai/catalog/standards/sist/eaff8bee-6bcb-435b-908a-46c8e534bfb4/iso-fdis-11298-4>

#### 3.1 General terms

##### 3.1.1

##### **carrier material**

porous component of the *lining tube* (3.1.8), which carries the liquid *resin system* (3.1.14) during insertion into the pipe being renovated and forms part of the installed lining system once the resin has been cured

##### 3.1.2

##### **CIPP product**

cured-in-place pipe of a particular design, produced from a *lining tube* (3.1.8) of specified materials, with a wall structure which is uniquely defined for each diameter/wall thickness combination, and which is impregnated with a specific *resin system* (3.1.14) and installed by a specific process

##### 3.1.3

##### **close fit**

situation of the outside of the installed liner relative to the inside of the existing pipeline, which can either be an interference fit or include a small annular gap resulting from shrinkage and tolerances only

##### 3.1.4

##### **composite**

combination of cured *resin system* (3.1.14), *carrier material* (3.1.1) and/or *reinforcement* (3.1.13), excluding any internal or external membranes

##### 3.1.5

##### **curing**

process of resin polymerization, which can be initiated or accelerated by the use of heat or exposure to light

**3.1.6****design thickness**

required wall thickness of the *composite* (3.1.4), excluding any abrasion layer, as determined by structural design

**3.1.7****first break**

elastic limit or first major discontinuity of the stress-strain curve associated with local failure of the resin matrix or reinforcing fibres

**3.1.8****lining tube**

flexible tube, consisting of *carrier material* (3.1.1), *resin system* (3.1.14) and any membranes and/or *reinforcement* (3.1.13), as combined prior to insertion in the pipe to be lined

**3.1.9****nominal CIPP “M” stage wall thickness**

one of a range of discrete *lining tube* (3.1.8) wall thicknesses dictated by the sum of the thicknesses of the individual layers of materials used for tube construction at the “M” stage, excluding any internal or external membranes

Note 1 to entry: This term is expressed using the symbol  $e_{n,M}$  (see 4.1).

**3.1.10****nominal CIPP “I” stage wall thickness**

one of a range of discrete *CIPP product* (3.1.2) wall thicknesses at the “I” stage, dictated by the sum of the thicknesses of the individual layers of materials used for *lining tube* (3.1.8) construction, excluding any internal or external membranes

Note 1 to entry: This term is expressed using the symbol  $e_{n,I}$  (see 4.1).

**3.1.11****permanent membrane**

internal or external membrane designed to retain its integrity through the processes of *lining tube* (3.1.8) insertion and *resin system* (3.1.14) cure, and to provide functions for the operational life of the CIPP liner

**3.1.12****preliner**

permanent or semi-permanent external membrane which is installed separately, before insertion of the resin-impregnated *lining tube* (3.1.8)

**3.1.13****reinforcement**

fibres incorporated in the *lining tube* (3.1.8), which enhance the dimensional stability of the lining tube and/or the structural properties of the cured *composite* (3.1.4)

Note 1 to entry: The reinforcement can be incorporated in the carrier material (3.1.1), constitute the carrier material, or can be a separate layer.

**3.1.14****resin system**

thermosetting resin including the curing agent(s) and any fillers or other additives, in specified proportions

**3.1.15****semi-permanent membrane**

internal or external membrane designed to retain its integrity through the processes of *lining tube* (3.1.8) insertion and *resin system* (3.1.14) cure, but not relied on to retain its integrity at the “I” stage

### 3.1.16

#### **service temperature**

maximum sustained temperature at which a system is expected to operate

Note 1 to entry: Service temperature is expressed in degrees Celsius (°C).

### 3.1.17

#### **temporary membrane**

membrane forming the internal or external surface of the pipe at the "M" stage, with functions at the "M" stage only, removed during or after installation

### 3.1.18

#### **total thickness**

thickness of cured-in-place pipe (CIPP) at the "I" stage comprising the composite (3.1.4) and any *semi-permanent* (3.1.15) and *permanent membranes* (3.1.11)

### 3.1.19

#### **type testing**

testing performed to prove that the material, product, joint or assembly is capable of conforming to the requirements given in the relevant standard

## 3.2 Techniques

### 3.2.1

#### **inversion**

process of turning a flexible tube or hose inside out by the use of fluid (water or air) pressure

### 3.2.2

#### **inverted-in-place insertion**

method whereby the impregnated *lining tube* (3.1.8) is introduced by *inversion* (3.2.1) to achieve simultaneous insertion and inflation

### 3.2.3

#### **winched-in-place insertion**

method whereby the flat impregnated *lining tube* (3.1.8) is first pulled into the pipe to be lined and then inflated to bring it up to size

Note 1 to entry: With some techniques, inflation is achieved by *inversion* (3.2.1) through the pulled-in lining tube of a separate impregnated tube or dry hose, which is either withdrawn after resin cure or left in place as a permanent internal membrane.

## 3.3 Characteristics

### 3.3.1

#### **projected failure pressure at 50 years**

value at 50 years derived from the pressure regression line obtained from long-term pressure tests performed in accordance with ISO 7509 and analysed in accordance with ISO 10928

Note 1 to entry: This term is expressed using the symbol  $p_{50}$  (see 4.1).

[SOURCE: ISO 10639:2017, 3.12.10 — modified.]

### 3.3.2

#### **minimum failure pressure at 50 years**

95% lower confidence level (LCL) of the failure pressure at 50 years

Note 1 to entry: This term is expressed using the symbol  $p_{50,\min}$  (see 4.1).

[SOURCE: ISO 10639:2017, 3.12.7 — modified.]

### 3.4 Materials

No additional definitions apply.

### 3.5 Product stages

No additional definitions apply.

### 3.6 Service conditions

#### 3.6.1

##### PN

##### nominal pressure

alphanumeric designation for a nominal pressure class, which is the maximum sustained hydraulic internal pressure for which a pipe is designed in the absence of other loading conditions than internal pressure

Note 1 to entry: Nominal pressure is expressed in bars (i.e. 1 bar = 0,1 MPa = 0,1 N/mm<sup>2</sup> = 10<sup>5</sup>·N/m<sup>2</sup>).

Note 2 to entry: The designation for reference or marking purposes consists of the letters PN plus a number.

[SOURCE: ISO 10639:2017, 3.12.2, modified — the last part of the definition has been deleted for simplification.]

## 4 Symbols and abbreviated terms

iTech STANDARD PREVIEW  
(standards.iteh.ai)

### 4.1 Symbols

$b$	width of test piece
$C_E$	Correction factor on 3-point flexural modulus for curvature of test piece
$C_\sigma$	Correction factor on 3-point flexural stress for curvature of test piece
$d_i$	inside diameter
$d_m$	mean diameter of pipe sample at mid-thickness of the composite (= $2R_2$ )
$d_n$	nominal outside diameter
$E_0$	short-term flexural modulus
$E_c$	apparent flexural modulus of curved 3-point bend test piece, before correction for curvature
$E_f$	apparent flexural modulus of flat 3-point bend test piece
$E_x$	long-term flexural modulus at $x$ years
$E_t$	flexural creep modulus at time $t$
$EI$	section bending stiffness per unit length of the pipe wall
$EI_c$	apparent section bending stiffness of curved 3-point test piece before correction for curvature
$e_1$	thickness of internal membrane
$e_2$	thickness of external membrane
$e_c$	thickness of the composite