

ETSI TS 131 130 V17.4.0 (2024-05)



**Digital cellular telecommunications system (Phase 2+) (GSM);
Universal Mobile Telecommunications System (UMTS);
LTE;
5G;
(U)SIM Application Programming Interface (API);
(U)SIM API for Java™ Card
(3GPP TS 31.130 version 17.4.0 Release 17)**



Reference

RTS/TSGC-0631130vh40

Keywords

5G,GSM,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables. (2024-05)

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	4
1 Scope	6
2 References	6
3 Definitions and abbreviations.....	7
3.1 Definitions	7
3.2 Abbreviations	7
4 Description	7
4.0 Overview	7
4.1 (U)SIM Java Card™ Architecture.....	8
5 File Access API.....	8
6 (U)SAT Framework	8
6.0 Overview	8
6.1 Applet triggering	9
6.1.1 Exception Handling	9
6.2 Definition of Events	9
6.3 Registration	13
6.4 Proactive command handling	14
6.5 Envelope response handling	14
6.6 System Handler management	14
6.7 (U)SAT Framework behaviour.....	15
7 UICC toolkit applet	15
8 Geo Location API.....	15
9 SUCI API	15
Annex A (normative): Java Card™ (U)SIM API.....	17
Annex B (normative): Java Card™ (U)SIM API identifiers	18
Annex C (normative): (U)SIM API package version management	19
Annex D (normative): USIM API jar files	21
Annex E (informative): Change History	22
History	25

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ETSI TS 131 130 V17.4.0 \(2024-05\)](https://standards.iteh.ai/catalog/standards/etsi/2298bfa9-1b70-4a58-b8de-779e5f7acb3b/etsi-ts-131-130-v17-4-0-2024-05)

<https://standards.iteh.ai/catalog/standards/etsi/2298bfa9-1b70-4a58-b8de-779e5f7acb3b/etsi-ts-131-130-v17-4-0-2024-05>

1 Scope

The present document defines the (U)SIM Application Programming Interface extending the "UICC API for Java Card™" [2].

This API allows to develop a (U)SAT application running together with a (U)SIM application and using 3GPP network features.

The present document includes information applicable to 3GPP network operators, service providers, server – (U)SIM – database manufacturers.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] ETSI TS 101 220: "Integrated Circuit Cards (ICC); ETSI numbering system for telecommunication; Application providers (AID)".
- [2] ETSI TS 102 241 V15.0.0: "UICC API for Java Card™"
- [3] 3GPP TS 31.102: "Characteristics of the USIM Application".
- [4] 3GPP TS 51.011 Release 4: "Specification of the Subscriber Identity Module- Mobile Equipment (SIM – ME) interface".
- [5] 3GPP TS 23.041: "Technical realization of Cell Broadcast Service (CBS)".
- [6] 3GPP TS 31.101: "UICC-terminal interface; Physical and logical characteristics".
- [7] 3GPP TS 31.111: "USIM Application Toolkit (USAT)".
- [8] 3GPP TS 51.014 Release 4: "Specification of the SIM Application Toolkit for the Subscriber Identity Module – Mobile Equipment (SIM – ME) interface".
- [9] 3GPP TS 31.115: "Secured packet structure for the (U)SIM Toolkit applications".
- [10] 3GPP TS 23.040: "Technical realization of the Short Message Service (SMS)".
- [11] Void.
- [12] Void.
- [13] Void.
- [14] 3GPP TS 23.032: "Universal Geographical Area Description (GAD)".
- [15] IEC 61162-1: "Maritime navigation and radio communication equipment and systems – Digital interfaces".
- [16] 3GPP TS 23.003: "Numbering, Addressing and Identification".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions defined in ETSI TS 102 241 [2] apply.

(U)SAT Framework : (U)SAT extension of the CAT Runtime Environment.

3.2 Abbreviations

For the purposes of the present document, the abbreviations defined in ETSI TS 102 241 [2] apply.

4 Description

4.0 Overview

This API is an extension to the ETSI TS 102 241 [2] "UICC API for Java Card™" and requires the implementation of this specification.

The classes and interfaces described in this specification inherit functionality from the classes and interfaces specified in the "UICC API for Java Card™".

The (U)SAT Framework described in this specification is an extension of the CAT Runtime Environment defined in ETSI TS 102 241 [2].

iteh Standards
(<https://standards.iteh.ai>)
Document Preview

[ETSI TS 131 130 V17.4.0 \(2024-05\)](https://standards.iteh.ai/catalog/standards/etsi/2298bfa9-1b70-4a58-b8de-779e5f7acb3b/etsi-ts-131-130-v17-4-0-2024-05)

<https://standards.iteh.ai/catalog/standards/etsi/2298bfa9-1b70-4a58-b8de-779e5f7acb3b/etsi-ts-131-130-v17-4-0-2024-05>

4.1 (U)SIM Java Card™ Architecture

The overall architecture of the (U)SIM API is based on the "UICC API for Java Card™" defined in ETSI TS 102 241 [2].

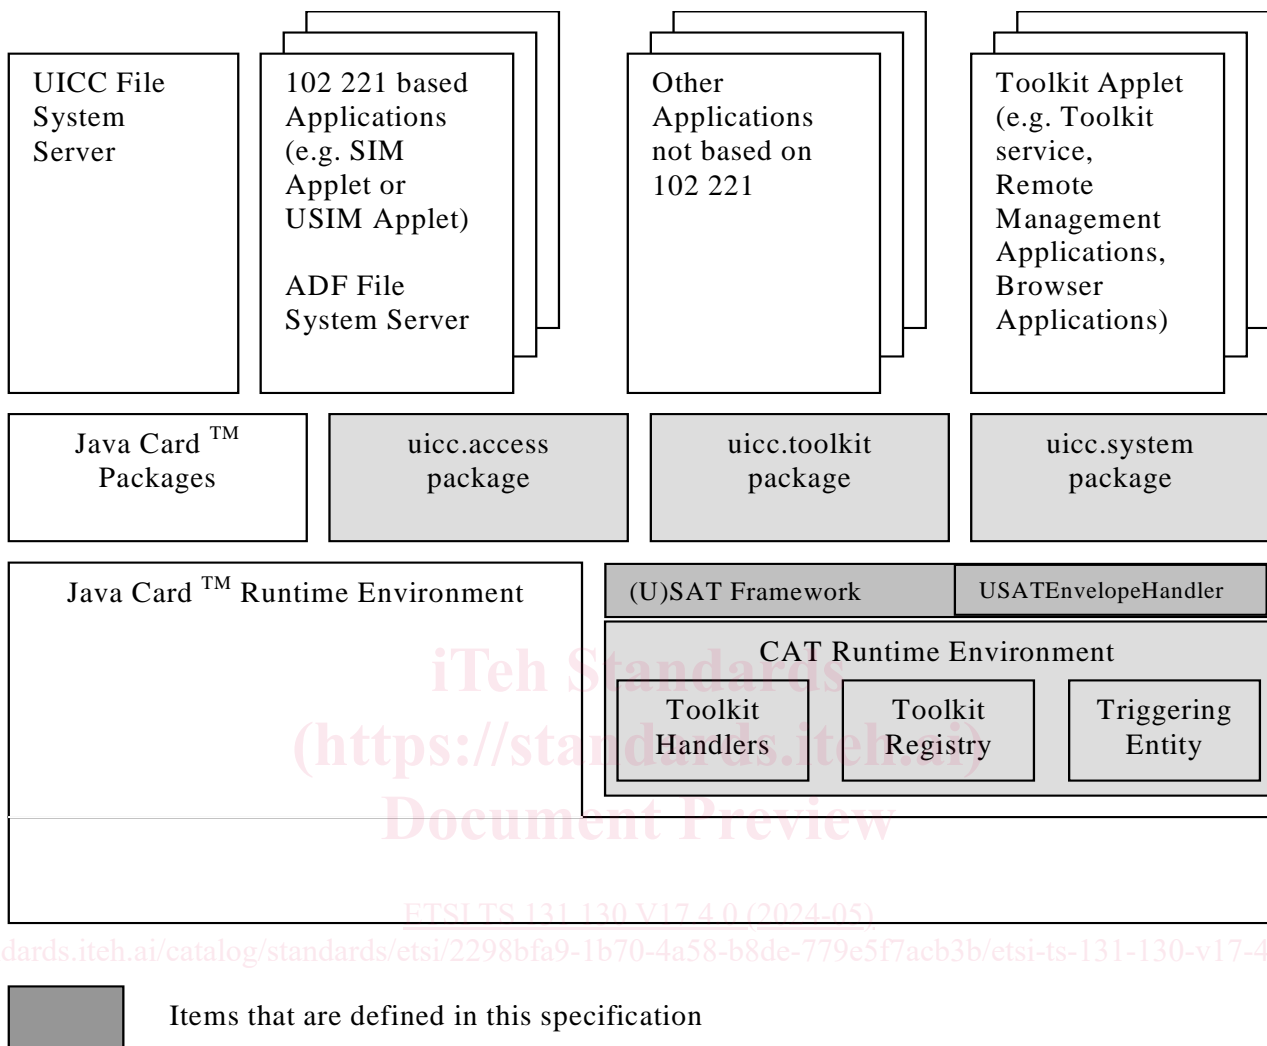


Figure 1: (U)SIM Java Card™ Architecture

5 File Access API

The (U)SIM file access API consists of the package *uicc.usim.access*. This package defines additional constants to those defined in the *uicc.access* package from ETSI TS 102 241 [2]. The access to the file system, defined in TS 51.011 [4] and TS 31.102 [3], is the one specified in ETSI TS 102 241 [2] via the UICC *FileView* Interface. When selecting a cyclic file the current record number is defined, this applies also to files located under DF_{GSM}.

6 (U)SAT Framework

6.0 Overview

The (U)SIM toolkit API consists of the *uicc.usim.toolkit* package for toolkit features defined in TS 31.111 [7] and TS 51.014 [8], and is based on the *uicc.toolkit* package defined in ETSI TS 102 241 [2].

6.1 Applet triggering

See ETSI TS 102 241 [2].

6.1.1 Exception Handling

The following clause describes the handling of exceptions by the (U)SAT Framework in addition to the behaviour defined in ETSI TS 102 241 [2] for the CAT Runtime Environment.

If an Applet triggered by `EVENT_FORMATTED_SMS_PP_ENV` event throws an `ISOException` with the reason code (0x6FXX), it shall be sent to the terminal.

Other Exceptions shall not be propagated to the terminal.

6.2 Definition of Events

The following events can trigger a Toolkit Applet in addition to the events defined in ETSI TS 102 241 [2], all short values are reserved in ETSI TS 102 241 [2]:

Table 1: (U)SAT event list

Event Name	Reserved short value
<code>EVENT_FORMATTED_SMS_PP_ENV</code>	2
<code>EVENT_FORMATTED_SMS_PP_UPD</code>	3
<code>EVENT_UNFORMATTED_SMS_PP_ENV</code>	4
<code>EVENT_UNFORMATTED_SMS_PP_UPD</code>	5
<code>EVENT_UNFORMATTED_SMS_CB</code>	6
<code>EVENT_MO_SHORT_MESSAGE_CONTROL_BY_NAA</code>	10
<code>EVENT_FORMATTED_SMS_CB</code>	24
<code>EVENT_EVENT_DOWNLOAD_IWLAN_ACCESS_STATUS</code>	30
<code>EVENT_EVENT_DOWNLOAD_NETWORK_REJECTION</code>	31
<code>EVENT_EVENT_DOWNLOAD_CSG_CELL_SELECTION</code>	33
<code>EVENT_EVENT_DOWNLOAD_DATA_CONNECTION_STATUS_CHANGE</code>	37
Reserved for 3GPP (for future usage)	113
Reserved for 3GPP (for future usage)	114
Reserved for 3GPP (for future usage)	115
Reserved for 3GPP (for future usage)	116
Reserved for 3GPP (for future usage)	117
<code>EVENT_EVENT_DOWNLOAD_CAG_CELL_SELECTION</code>	118
<code>EVENT_EVENT_DOWNLOAD_IMS_REGISTRATION</code>	119
<code>EVENT_EVENT_DOWNLOAD_INCOMING_IMS_DATA</code>	120
<code>EVENT_FORMATTED_USSD</code>	121
<code>EVENT_UNFORMATTED_USSD</code>	122

`EVENT_FORMATTED_SMS_PP_ENV`, `EVENT_UNFORMATTED_SMS_PP_ENV`,
`EVENT_FORMATTED_SMS_PP_UPD`, `EVENT_UNFORMATTED_SMS_PP_UPD`

There are two ways for a card to receive a Short Message Point to Point: via an `ENVELOPE(SMS-PP DOWNLOAD)` APDU as defined in TS 31.111 [7] and TS 51.014 [8] or an `UPDATE RECORD EFSMS` APDU as defined in TS 31.102 [3] and TS 51.011 [4]. The `EFSMS` can be either located under the `DFTelecom` or under any ADF as defined in TS 31.102 [3] and TS 51.011 [4].

The received Short Message may be:

- formatted according to TS 31.115 [9] or an other protocol to identify explicitly the toolkit applet for which the message is sent;
- unformatted (e.g. a toolkit applet specific protocol) then the (U)SAT Framework will pass this data to all registered toolkit applets.