

# ETSI TS 138 321 V16.15.0 (2024-05)



## 5G; NR; Medium Access Control (MAC) protocol specification (3GPP TS 38.321 version 16.15.0 Release 16)

[ETSI TS 138 321 V16.15.0 \(2024-05\)](https://standards.iteh.ai/catalog/standards/etsi/3f8bc1d2-f80c-4ff8-8721-d06d76899f60/etsi-ts-138-321-v16-15-0-2024-05)

<https://standards.iteh.ai/catalog/standards/etsi/3f8bc1d2-f80c-4ff8-8721-d06d76899f60/etsi-ts-138-321-v16-15-0-2024-05>



---

**Reference**

RTS/TSGR-0238321v9f0

---

**Keywords**

5G

---

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables. (2024-05)

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

|                                                                          |    |
|--------------------------------------------------------------------------|----|
| Intellectual Property Rights .....                                       | 2  |
| Legal Notice .....                                                       | 2  |
| Modal verbs terminology.....                                             | 2  |
| Foreword.....                                                            | 7  |
| 1 Scope .....                                                            | 8  |
| 2 References .....                                                       | 8  |
| 3 Definitions, symbols and abbreviations .....                           | 9  |
| 3.1 Definitions .....                                                    | 9  |
| 3.2 Abbreviations .....                                                  | 10 |
| 4 General .....                                                          | 11 |
| 4.1 Introduction .....                                                   | 11 |
| 4.2 MAC architecture .....                                               | 11 |
| 4.2.1 General.....                                                       | 11 |
| 4.2.2 MAC Entities .....                                                 | 11 |
| 4.3 Services .....                                                       | 13 |
| 4.3.1 Services provided to upper layers.....                             | 13 |
| 4.3.2 Services expected from physical layer.....                         | 13 |
| 4.4 Functions .....                                                      | 13 |
| 4.5 Channel structure.....                                               | 14 |
| 4.5.1 General.....                                                       | 14 |
| 4.5.2 Transport Channels .....                                           | 14 |
| 4.5.3 Logical Channels .....                                             | 14 |
| 4.5.4 Mapping of Transport Channels to Logical Channels .....            | 15 |
| 4.5.4.1 General .....                                                    | 15 |
| 4.5.4.2 Uplink mapping.....                                              | 15 |
| 4.5.4.3 Downlink mapping.....                                            | 15 |
| 4.5.4.4 Sidelink mapping .....                                           | 15 |
| 5 MAC procedures .....                                                   | 16 |
| 5.1 Random Access procedure .....                                        | 16 |
| 5.1.1 Random Access procedure initialization.....                        | 16 |
| 5.1.1a Initialization of variables specific to Random Access type .....  | 20 |
| 5.1.2 Random Access Resource selection.....                              | 22 |
| 5.1.2a Random Access Resource selection for 2-step RA type .....         | 24 |
| 5.1.3 Random Access Preamble transmission .....                          | 26 |
| 5.1.3a MSGA transmission.....                                            | 27 |
| 5.1.4 Random Access Response reception.....                              | 29 |
| 5.1.4a MSGB reception and contention resolution for 2-step RA type ..... | 31 |
| 5.1.5 Contention Resolution .....                                        | 34 |
| 5.1.6 Completion of the Random Access procedure.....                     | 36 |
| 5.2 Maintenance of Uplink Time Alignment.....                            | 36 |
| 5.3 DL-SCH data transfer.....                                            | 37 |
| 5.3.1 DL Assignment reception .....                                      | 37 |
| 5.3.2 HARQ operation.....                                                | 39 |
| 5.3.2.1 HARQ Entity.....                                                 | 39 |
| 5.3.2.2 HARQ process .....                                               | 39 |
| 5.3.3 Disassembly and demultiplexing .....                               | 40 |
| 5.4 UL-SCH data transfer.....                                            | 41 |
| 5.4.1 UL Grant reception .....                                           | 41 |
| 5.4.2 HARQ operation.....                                                | 44 |
| 5.4.2.1 HARQ Entity.....                                                 | 44 |
| 5.4.2.2 HARQ process .....                                               | 47 |
| 5.4.3 Multiplexing and assembly .....                                    | 49 |
| 5.4.3.1 Logical Channel Prioritization .....                             | 49 |

|             |                                                                                                      |    |
|-------------|------------------------------------------------------------------------------------------------------|----|
| 5.4.3.1.1   | General .....                                                                                        | 49 |
| 5.4.3.1.2   | Selection of logical channels .....                                                                  | 49 |
| 5.4.3.1.3   | Allocation of resources.....                                                                         | 50 |
| 5.4.3.2     | Multiplexing of MAC Control Elements and MAC SDUs .....                                              | 52 |
| 5.4.4       | Scheduling Request.....                                                                              | 52 |
| 5.4.5       | Buffer Status Reporting .....                                                                        | 55 |
| 5.4.6       | Power Headroom Reporting .....                                                                       | 57 |
| 5.4.7       | Pre-emptive Buffer Status Reporting.....                                                             | 60 |
| 5.5         | PCH reception .....                                                                                  | 60 |
| 5.6         | BCH reception.....                                                                                   | 61 |
| 5.7         | Discontinuous Reception (DRX).....                                                                   | 61 |
| 5.8         | Transmission and reception without dynamic scheduling.....                                           | 65 |
| 5.8.1       | Downlink .....                                                                                       | 65 |
| 5.8.2       | Uplink .....                                                                                         | 66 |
| 5.8.3       | Sidelink.....                                                                                        | 67 |
| 5.9         | Activation/Deactivation of SCells.....                                                               | 69 |
| 5.10        | Activation/Deactivation of PDCP duplication.....                                                     | 71 |
| 5.11        | MAC reconfiguration .....                                                                            | 71 |
| 5.12        | MAC Reset.....                                                                                       | 72 |
| 5.13        | Handling of unknown, unforeseen and erroneous protocol data .....                                    | 73 |
| 5.14        | Handling of measurement gaps .....                                                                   | 73 |
| 5.15        | Bandwidth Part (BWP) operation.....                                                                  | 73 |
| 5.15.1      | Downlink and Uplink.....                                                                             | 73 |
| 5.15.2      | Sidelink.....                                                                                        | 77 |
| 5.16        | SUL operation .....                                                                                  | 78 |
| 5.17        | Beam Failure Detection and Recovery procedure.....                                                   | 78 |
| 5.18        | Handling of MAC CEs .....                                                                            | 80 |
| 5.18.1      | General.....                                                                                         | 80 |
| 5.18.2      | Activation/Deactivation of Semi-persistent CSI-RS/CSI-IM resource set .....                          | 80 |
| 5.18.3      | Aperiodic CSI Trigger State Subselection .....                                                       | 81 |
| 5.18.4      | Activation/Deactivation of UE-specific PDSCH TCI state .....                                         | 81 |
| 5.18.5      | Indication of TCI state for UE-specific PDCCH .....                                                  | 81 |
| 5.18.6      | Activation/Deactivation of Semi-persistent CSI reporting on PUCCH .....                              | 81 |
| 5.18.7      | Activation/Deactivation of Semi-persistent SRS and Indication of spatial relation of SP/AP SRS ..... | 82 |
| 5.18.8      | Activation/Deactivation of spatial relation of PUCCH resource .....                                  | 82 |
| 5.18.9      | Activation/Deactivation of semi-persistent ZP CSI-RS resource set.....                               | 82 |
| 5.18.10     | Recommended Bit Rate .....                                                                           | 83 |
| 5.18.11     | Void.....                                                                                            | 83 |
| 5.18.12     | Void.....                                                                                            | 83 |
| 5.18.13     | Void.....                                                                                            | 83 |
| 5.18.14     | Update of Pathloss Reference RS of SRS.....                                                          | 83 |
| 5.18.15     | Update of Pathloss Reference RS of PUSCH .....                                                       | 83 |
| 5.18.16     | Indication of spatial relation of SRS resource for a Serving Cell set.....                           | 84 |
| 5.18.17     | Activation/Deactivation of Semi-Persistent Positioning SRS.....                                      | 84 |
| 5.18.18     | Timing offset adjustment for IAB.....                                                                | 84 |
| 5.18.19     | Guard symbols for IAB.....                                                                           | 84 |
| 5.19        | Data inactivity monitoring.....                                                                      | 85 |
| 5.20        | Void.....                                                                                            | 85 |
| 5.21        | LBT operation .....                                                                                  | 85 |
| 5.21.1      | General.....                                                                                         | 85 |
| 5.21.2      | LBT failure detection and recovery procedure .....                                                   | 86 |
| 5.22        | SL-SCH Data transfer .....                                                                           | 87 |
| 5.22.1      | SL-SCH Data transmission.....                                                                        | 87 |
| 5.22.1.1    | SL Grant reception and SCI transmission .....                                                        | 87 |
| 5.22.1.2    | TX resource (re-)selection check .....                                                               | 92 |
| 5.22.1.2a   | Re-evaluation and Pre-emption.....                                                                   | 93 |
| 5.22.1.3    | Sidelink HARQ operation.....                                                                         | 94 |
| 5.22.1.3.1  | Sidelink HARQ Entity.....                                                                            | 94 |
| 5.22.1.3.1a | Sidelink process.....                                                                                | 96 |
| 5.22.1.3.2  | PSFCH reception.....                                                                                 | 97 |
| 5.22.1.3.3  | HARQ-based Sidelink RLF detection .....                                                              | 98 |
| 5.22.1.4    | Multiplexing and assembly .....                                                                      | 99 |

|              |                                                                                    |     |
|--------------|------------------------------------------------------------------------------------|-----|
| 5.22.1.4.0   | General .....                                                                      | 99  |
| 5.22.1.4.1   | Logical channel prioritization.....                                                | 99  |
| 5.22.1.4.1.1 | General.....                                                                       | 99  |
| 5.22.1.4.1.2 | Selection of logical channels.....                                                 | 99  |
| 5.22.1.4.1.3 | Allocation of sidelink resources.....                                              | 100 |
| 5.22.1.4.2   | Multiplexing of MAC Control Elements and MAC SDUs.....                             | 101 |
| 5.22.1.5     | Scheduling Request .....                                                           | 101 |
| 5.22.1.6     | Buffer Status Reporting.....                                                       | 101 |
| 5.22.1.7     | CSI Reporting .....                                                                | 104 |
| 5.22.2       | SL-SCH Data reception .....                                                        | 105 |
| 5.22.2.1     | SCI reception.....                                                                 | 105 |
| 5.22.2.2     | Sidelink HARQ operation .....                                                      | 105 |
| 5.22.2.2.1   | Sidelink HARQ Entity.....                                                          | 105 |
| 5.22.2.2.2   | Sidelink process.....                                                              | 106 |
| 5.22.2.3     | Disassembly and demultiplexing .....                                               | 107 |
| 5.23         | SL-BCH data transfer.....                                                          | 107 |
| 5.23.1       | SL-BCH data transmission .....                                                     | 107 |
| 5.23.2       | SL-BCH data reception.....                                                         | 107 |
| 6            | Protocol Data Units, formats and parameters.....                                   | 108 |
| 6.1          | Protocol Data Units .....                                                          | 108 |
| 6.1.1        | General.....                                                                       | 108 |
| 6.1.2        | MAC PDU (DL-SCH and UL-SCH except transparent MAC and Random Access Response)..... | 108 |
| 6.1.3        | MAC Control Elements (CEs).....                                                    | 111 |
| 6.1.3.1      | Buffer Status Report MAC CEs .....                                                 | 111 |
| 6.1.3.2      | C-RNTI MAC CE .....                                                                | 115 |
| 6.1.3.3      | UE Contention Resolution Identity MAC CE .....                                     | 115 |
| 6.1.3.4      | Timing Advance Command MAC CE .....                                                | 115 |
| 6.1.3.4a     | Absolute Timing Advance Command MAC CE.....                                        | 116 |
| 6.1.3.5      | DRX Command MAC CE .....                                                           | 116 |
| 6.1.3.6      | Long DRX Command MAC CE .....                                                      | 116 |
| 6.1.3.7      | Configured Grant Confirmation MAC CE .....                                         | 116 |
| 6.1.3.8      | Single Entry PHR MAC CE.....                                                       | 116 |
| 6.1.3.9      | Multiple Entry PHR MAC CE .....                                                    | 118 |
| 6.1.3.10     | SCell Activation/Deactivation MAC CEs .....                                        | 120 |
| 6.1.3.11     | Duplication Activation/Deactivation MAC CE.....                                    | 121 |
| 6.1.3.12     | SP CSI-RS/CSI-IM Resource Set Activation/Deactivation MAC CE .....                 | 121 |
| 6.1.3.13     | Aperiodic CSI Trigger State Subselection MAC CE .....                              | 122 |
| 6.1.3.14     | TCI States Activation/Deactivation for UE-specific PDSCH MAC CE .....              | 123 |
| 6.1.3.15     | TCI State Indication for UE-specific PDCCH MAC CE .....                            | 124 |
| 6.1.3.16     | SP CSI reporting on PUCCH Activation/Deactivation MAC CE .....                     | 124 |
| 6.1.3.17     | SP SRS Activation/Deactivation MAC CE.....                                         | 125 |
| 6.1.3.18     | PUCCH spatial relation Activation/Deactivation MAC CE.....                         | 126 |
| 6.1.3.19     | SP ZP CSI-RS Resource Set Activation/Deactivation MAC CE .....                     | 127 |
| 6.1.3.20     | Recommended bit rate MAC CE .....                                                  | 127 |
| 6.1.3.21     | Timing Delta MAC CE .....                                                          | 128 |
| 6.1.3.22     | Guard Symbols MAC CEs .....                                                        | 129 |
| 6.1.3.23     | BFR MAC CEs .....                                                                  | 129 |
| 6.1.3.24     | Enhanced TCI States Activation/Deactivation for UE-specific PDSCH MAC CE .....     | 131 |
| 6.1.3.25     | Enhanced PUCCH Spatial Relation Activation/Deactivation MAC CE .....               | 132 |
| 6.1.3.26     | Enhanced SP/AP SRS Spatial Relation Indication MAC CE.....                         | 133 |
| 6.1.3.27     | SRS Pathloss Reference RS Update MAC CE.....                                       | 134 |
| 6.1.3.28     | PUSCH Pathloss Reference RS Update MAC CE .....                                    | 135 |
| 6.1.3.29     | Serving Cell Set based SRS Spatial Relation Indication MAC CE.....                 | 135 |
| 6.1.3.30     | LBT failure MAC CEs .....                                                          | 137 |
| 6.1.3.31     | Multiple Entry Configured Grant Confirmation MAC CE .....                          | 137 |
| 6.1.3.32     | Duplication RLC Activation/Deactivation MAC CE.....                                | 138 |
| 6.1.3.33     | Sidelink Buffer Status Report MAC CEs.....                                         | 138 |
| 6.1.3.34     | Sidelink Configured Grant Confirmation MAC CE.....                                 | 139 |
| 6.1.3.35     | Sidelink CSI Reporting MAC CE .....                                                | 139 |
| 6.1.3.36     | SP Positioning SRS Activation/Deactivation MAC CE.....                             | 140 |
| 6.1.4        | MAC PDU (transparent MAC).....                                                     | 143 |

|                                                    |                                               |            |
|----------------------------------------------------|-----------------------------------------------|------------|
| 6.1.5                                              | MAC PDU (Random Access Response).....         | 143        |
| 6.1.5a                                             | MAC PDU (MSGB) .....                          | 144        |
| 6.1.6                                              | MAC PDU (SL-SCH).....                         | 145        |
| 6.2                                                | Formats and parameters.....                   | 146        |
| 6.2.1                                              | MAC subheader for DL-SCH and UL-SCH .....     | 146        |
| 6.2.2                                              | MAC subheader for Random Access Response..... | 148        |
| 6.2.2a                                             | MAC subheader for MSGB .....                  | 149        |
| 6.2.3                                              | MAC payload for Random Access Response .....  | 149        |
| 6.2.3a                                             | MAC payload for MSGB.....                     | 150        |
| 6.2.4                                              | MAC subheader for SL-SCH.....                 | 152        |
| 7                                                  | Variables and constants .....                 | 152        |
| 7.1                                                | RNTI values .....                             | 152        |
| 7.2                                                | Backoff Parameter values.....                 | 154        |
| 7.3                                                | DELTA_PREAMBLE values .....                   | 154        |
| 7.4                                                | PRACH Mask Index values.....                  | 155        |
| <b>Annex A (informative): Change history .....</b> |                                               | <b>156</b> |
| History .....                                      |                                               | 161        |

iTech Standards  
(<https://standards.iteh.ai>)  
Document Preview

ETSI TS 138 321 V16.15.0 (2024-05)  
<https://standards.iteh.ai/catalog/standards/etsi/3f8bc1d2-f80c-4ff8-8721-d06d76899f60/etsi-ts-138-321-v16-15-0-2024-05>

---

## Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

**iTeh Standards**  
**(<https://standards.iteh.ai>)**  
**Document Preview**

[ETSI TS 138 321 V16.15.0 \(2024-05\)](https://standards.iteh.ai/catalog/standards/etsi/3f8bc1d2-f80c-4ff8-8721-d06d76899f60/etsi-ts-138-321-v16-15-0-2024-05)

<https://standards.iteh.ai/catalog/standards/etsi/3f8bc1d2-f80c-4ff8-8721-d06d76899f60/etsi-ts-138-321-v16-15-0-2024-05>

---

# 1 Scope

The present document specifies the NR MAC protocol.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 38.300: "NR; Overall description; Stage 2".
- [3] 3GPP TS 38.322: "NR; Radio Link Control (RLC) protocol specification".
- [4] 3GPP TS 38.323: "NR; Packet Data Convergence Protocol (PDCP) protocol specification".
- [5] 3GPP TS 38.331: "NR; Radio Resource Control (RRC); Protocol specification".
- [6] 3GPP TS 38.213: "NR; Physical Layer Procedures for control".
- [7] 3GPP TS 38.214: "NR; Physical Layer Procedures for data".
- [8] 3GPP TS 38.211: "NR; Physical channels and modulation".
- [9] 3GPP TS 38.212: "NR; Multiplexing and channel coding".
- [10] Void.
- [11] 3GPP TS 38.133: "NR; Requirements for support of radio resource management".
- [12] 3GPP TS 36.133: "Evolved Universal Terrestrial Radio Access (E-UTRA); Requirements for support of radio resource management".
- [13] 3GPP TS 26.114: "Technical Specification Group Services and System Aspects; IP Multimedia Subsystem (IMS); Multimedia Telephony; Media handling and interaction".
- [14] 3GPP TS 38.101-1: "NR; User Equipment (UE) radio transmission and reception; Part 1: Range 1 Standalone".
- [15] 3GPP TS 38.101-2: "NR; User Equipment (UE) radio transmission and reception; Part 2: Range 2 Standalone".
- [16] 3GPP TS 38.101-3: "NR; User Equipment (UE) radio transmission and reception; Part 3: Range 1 and Range 2 Interworking operation with other radios".
- [17] 3GPP TS 36.213: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Layer Procedures".
- [18] 3GPP TS 37.213: "Physical layer procedures for shared spectrum channel access".
- [19] 3GPP TS 23.287: "Architecture enhancements for 5G System (5GS) to support Vehicle-to-Everything (V2X) services".
- [20] 3GPP TS 23.285: "Architecture enhancements for V2X services".

- [21] 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC); Protocol specification".
- [22] 3GPP TS 36.321: "Evolved Universal Terrestrial Radio Access (E-UTRA); Medium Access Control (MAC); Protocol specification".
- [23] 3GPP TS 37.355: "Evolved Universal Terrestrial Radio Access (E-UTRA); LTE Positioning Protocol (LPP)".
- [24] 3GPP TS 38.215: "NR; Physical layer measurements".

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

**Dormant BWP:** The dormant BWP is one of downlink BWPs configured by the network via dedicated RRC signalling. In the dormant BWP, the UE stop monitoring PDCCH on/for the SCell, but continues performing CSI measurements, Automatic Gain Control (AGC) and beam management, if configured.

**DRX group:** A group of Serving Cells that is configured by RRC and that have the same DRX Active Time.

**HARQ information:** HARQ information for DL-SCH, for UL-SCH, or for SL-SCH transmissions consists of New Data Indicator (NDI), Transport Block Size (TBS), Redundancy Version (RV), and HARQ process ID.

**IAB-donor:** gNB that provides network access to UEs via a network of backhaul and access links.

**IAB-node:** RAN node that supports NR access links to UEs and NR backhaul links to parent nodes and child nodes.

**Listen Before Talk:** A procedure according to which transmissions are not performed if the channel is identified as being occupied, see TS 37.213 [18].

**Msg3:** Message transmitted on UL-SCH containing a C-RNTI MAC CE or CCCH SDU, submitted from upper layer and associated with the UE Contention Resolution Identity, as part of a Random Access procedure.

**NR backhaul link:** NR link used for backhauling between an IAB-node and an IAB-donor, and between IAB-nodes in case of a multi-hop backhauling.

**NR sidelink communication:** AS functionality enabling at least V2X Communication as defined in TS 23.287 [19], between two or more nearby UEs, using NR technology but not traversing any network node.

**PDCCH occasion:** A time duration (i.e. one or a consecutive number of symbols) during which the MAC entity is configured to monitor the PDCCH.

**Serving Cell:** A PCell, a PSCell, or an SCell in TS 38.331 [5].

**Sidelink transmission information:** Sidelink transmission information included in an SCI for an SL-SCH transmission as specified in clause 8.3 and 8.4 of TS 38.212 [9] consists of Sidelink HARQ information including NDI, RV, Sidelink process ID, HARQ feedback enabled/disabled indicator, Sidelink identification information including cast type indicator, Source Layer-1 ID and Destination Layer-1 ID, and Sidelink other information including CSI request, a priority, a communication range requirement and Zone ID.

**Special Cell:** For Dual Connectivity operation the term Special Cell refers to the PCell of the MCG or the PSCell of the SCG depending on if the MAC entity is associated to the MCG or the SCG, respectively. Otherwise the term Special Cell refers to the PCell. A Special Cell supports PUCCH transmission and contention-based Random Access, and is always activated.

**Timing Advance Group:** A group of Serving Cells that is configured by RRC and that, for the cells with a UL configured, using the same timing reference cell and the same Timing Advance value. A Timing Advance Group

containing the SpCell of a MAC entity is referred to as Primary Timing Advance Group (PTAG), whereas the term Secondary Timing Advance Group (STAG) refers to other TAGs.

**V2X sidelink communication:** AS functionality enabling V2X Communication as defined in TS 23.285 [20], between nearby UEs, using E-UTRA technology but not traversing any network node.

NOTE 1: A timer is running once it is started, until it is stopped or until it expires; otherwise it is not running. A timer can be started if it is not running or restarted if it is running. A Timer is always started or restarted from its initial value. The duration of a timer is not updated until it is stopped or expires (e.g. due to BWP switching). When the MAC entity applies zero value for a timer, the timer shall be started and immediately expire unless explicitly stated otherwise.

NOTE 2: In this version of the specification, the SRS in the procedural description includes Positioning SRS and Positioning SRS is treated the same as SRS by the UE unless explicitly stated otherwise.

## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

|             |                                       |
|-------------|---------------------------------------|
| AP          | Aperiodic                             |
| BFR         | Beam Failure Recovery                 |
| BSR         | Buffer Status Report                  |
| BWP         | Bandwidth Part                        |
| CE          | Control Element                       |
| CG          | Cell Group                            |
| CI-RNTI     | Cancellation Indication RNTI          |
| CSI         | Channel State Information             |
| CSI-IM      | CSI Interference Measurement          |
| CSI-RS      | CSI Reference Signal                  |
| CS-RNTI     | Configured Scheduling RNTI            |
| DAPS        | Dual Active Protocol Stack            |
| DCP         | DCI with CRC scrambled by PS-RNTI     |
| DL-PRS      | DownLink-Positioning Reference Signal |
| IAB         | Integrated Access and Backhaul        |
| INT-RNTI    | Interruption RNTI                     |
| LBT         | Listen Before Talk                    |
| LCG         | Logical Channel Group                 |
| LCP         | Logical Channel Prioritization        |
| MCG         | Master Cell Group                     |
| MPE         | Maximum Permissible Exposure          |
| NUL         | Normal Uplink                         |
| NZP CSI-RS  | Non-Zero Power CSI-RS                 |
| PDB         | Packet Delay Budget                   |
| PHR         | Power Headroom Report                 |
| PS-RNTI     | Power Saving RNTI                     |
| PTAG        | Primary Timing Advance Group          |
| QCL         | Quasi-colocation                      |
| RS          | Reference Signal                      |
| SCG         | Secondary Cell Group                  |
| SFI-RNTI    | Slot Format Indication RNTI           |
| SI          | System Information                    |
| SL-RNTI     | Sidelink RNTI                         |
| SL-CS-RNTI  | Sidelink Configured Scheduling RNTI   |
| SpCell      | Special Cell                          |
| SP          | Semi-Persistent                       |
| SP-CSI-RNTI | Semi-Persistent CSI RNTI              |
| SPS         | Semi-Persistent Scheduling            |
| SR          | Scheduling Request                    |
| SS          | Synchronization Signals               |
| SSB         | Synchronization Signal Block          |

|              |                                                       |
|--------------|-------------------------------------------------------|
| STAG         | Secondary Timing Advance Group                        |
| SUL          | Supplementary Uplink                                  |
| TAG          | Timing Advance Group                                  |
| TCI          | Transmission Configuration Indicator                  |
| TPC-SRS-RNTI | Transmit Power Control-Sounding Reference Signal-RNTI |
| UCI          | Uplink Control Information                            |
| V2X          | Vehicle-to-Everything                                 |
| ZP CSI-RS    | Zero Power CSI-RS                                     |

## 4 General

### 4.1 Introduction

The objective of this clause is to describe the MAC architecture and the MAC entity of the UE from a functional point of view.

### 4.2 MAC architecture

#### 4.2.1 General

This clause describes a model of the MAC i.e. it does not specify or restrict implementations.

RRC is in control of the MAC configuration.

#### 4.2.2 MAC Entities

The MAC entity of the UE handles the following transport channels:

- Broadcast Channel (BCH);
- Downlink Shared Channel(s) (DL-SCH);
- Paging Channel (PCH);
- Uplink Shared Channel(s) (UL-SCH);
- Random Access Channel(s) (RACH).

When the UE is configured with SCG, two MAC entities are configured to the UE: one for the MCG and one for the SCG.

When the UE is configured with DAPS handover, two MAC entities are used by the UE: one for the source cell (source MAC entity) and one for the target cell (target MAC entity).

The functions of the different MAC entities in the UE operate independently unless otherwise specified. The timers and parameters used in each MAC entity are configured independently unless otherwise specified. The Serving Cells, C-RNTI, radio bearers, logical channels, upper and lower layer entities, LCGs, and HARQ entities considered by each MAC entity refer to those mapped to that MAC entity unless otherwise specified.

If the MAC entity is configured with one or more SCells, there are multiple DL-SCH and there may be multiple UL-SCH as well as multiple RACH per MAC entity; one DL-SCH, one UL-SCH, and one RACH on the SpCell, one DL-SCH, zero or one UL-SCH and zero or one RACH for each SCell.

If the MAC entity is not configured with any SCell, there is one DL-SCH, one UL-SCH, and one RACH per MAC entity.

Figure 4.2.2-1 illustrates one possible structure of the MAC entity when SCG is not configured and for each MAC entity during DAPS handover.

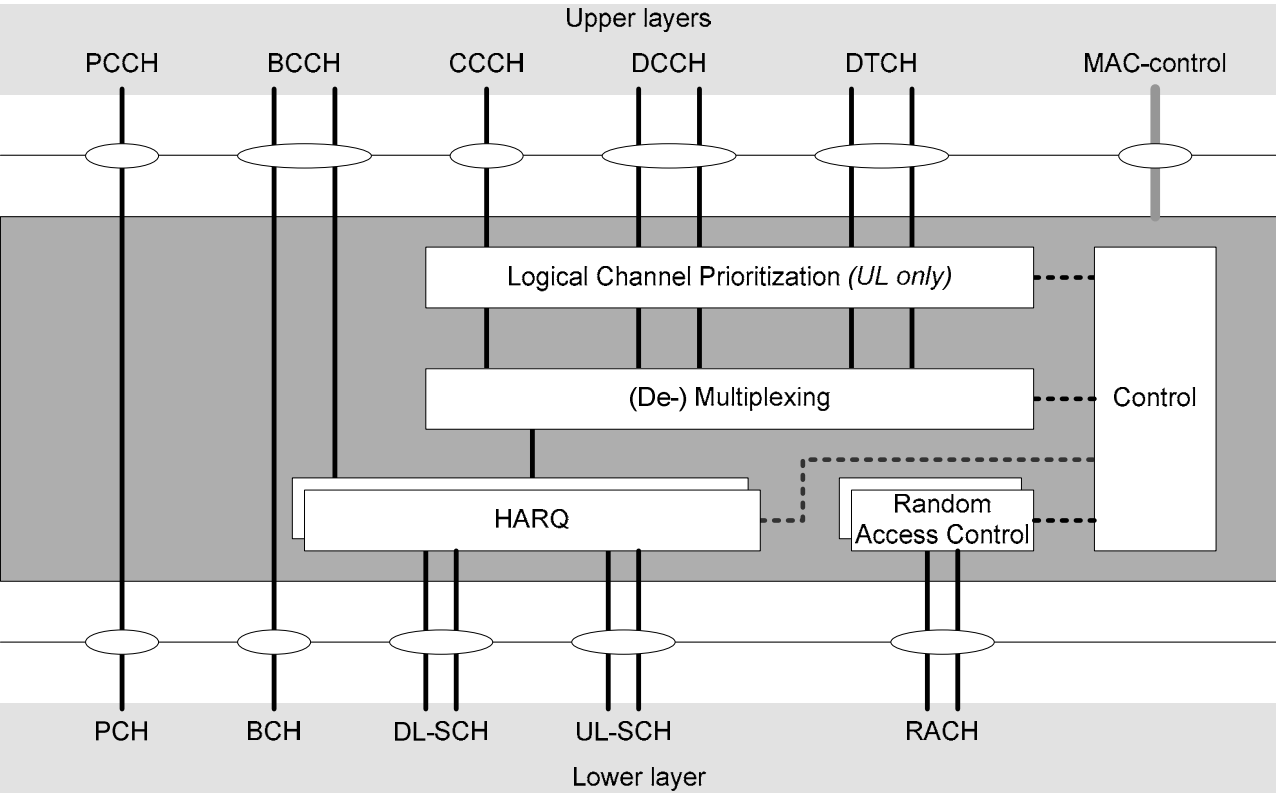


Figure 4.2.2-1: MAC structure overview

Figure 4.2.2-2 illustrates one possible structure for the MAC entities when MCG and SCG are configured.

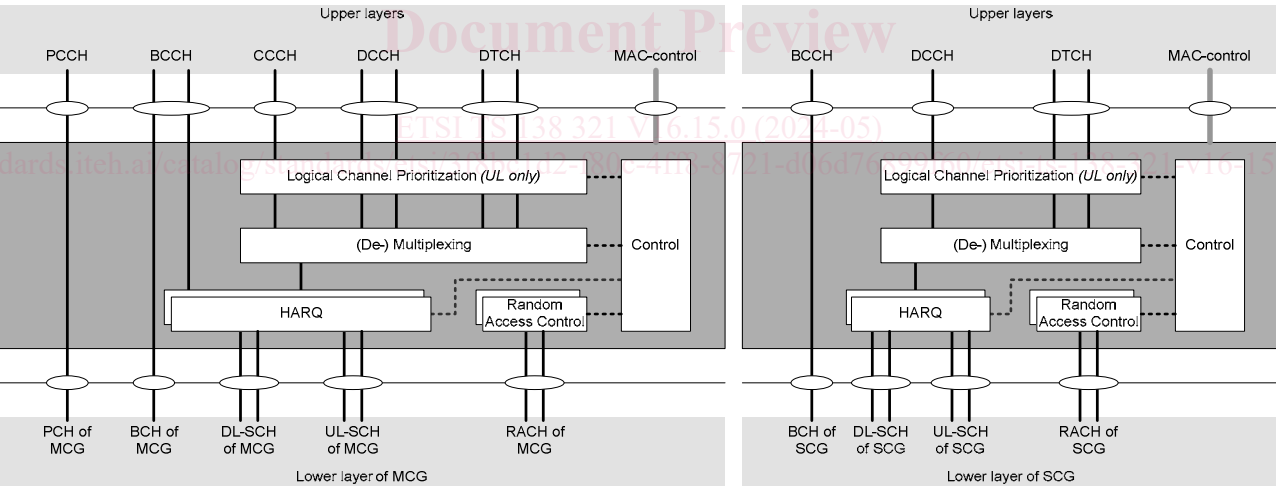
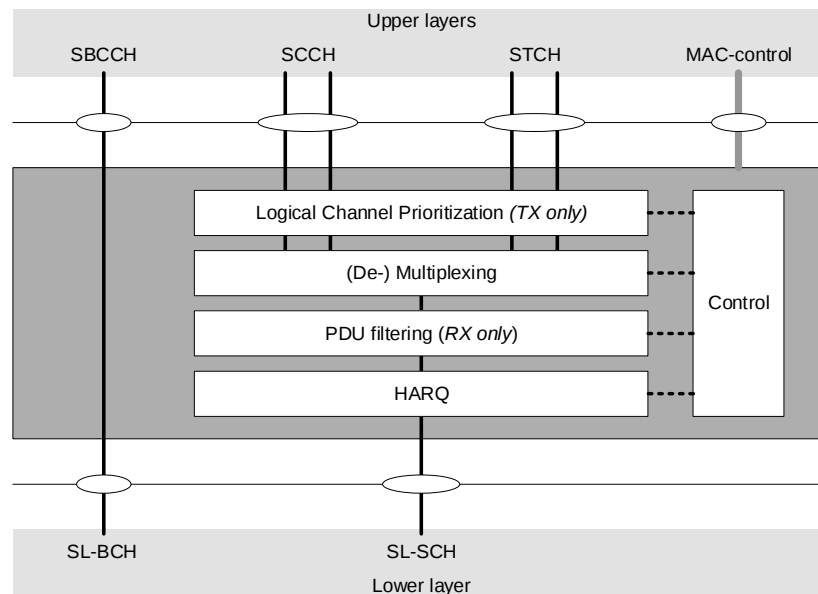


Figure 4.2.2-2: MAC structure overview with two MAC entities

In addition, the MAC entity of the UE handles the following transport channel for sidelink:

- Sidelink Shared Channel (SL-SCH);
- Sidelink Broadcast Channel (SL-BCH).

Figure 4.2.2-3 illustrates one possible structure for the MAC entity when sidelink is configured.



**Figure 4.2.2-3: MAC structure overview for sidelink**

## 4.3 Services

### 4.3.1 Services provided to upper layers

The MAC sublayer provides the following services to upper layers:

- data transfer;
- radio resource allocation.

### 4.3.2 Services expected from physical layer

The MAC sublayer expects the following services from the physical layer:

- data transfer services;
- signalling of HARQ feedback;
- signalling of Scheduling Request;
- measurements (e.g. Channel Quality Indication (CQI)).

## 4.4 Functions

The MAC sublayer supports the following functions:

- mapping between logical channels and transport channels;
- multiplexing of MAC SDUs from one or different logical channels onto transport blocks (TB) to be delivered to the physical layer on transport channels;
- demultiplexing of MAC SDUs to one or different logical channels from transport blocks (TB) delivered from the physical layer on transport channels;
- scheduling information reporting;
- error correction through HARQ;
- logical channel prioritization;