



SLOVENSKI STANDARD
SIST EN 12167:2024

01-december-2024

Baker in bakrove zlitine - Profili in palice za splošno uporabo

Copper and copper alloys - Profiles and bars for general purposes

Kupfer und Kupferlegierungen - Profile und Rechteckstangen zur allgemeinen Verwendung

Cuivre et alliages de cuivre - Profilés et barres pour usages généraux

Ta slovenski standard je istoveten z: EN 12167:2024

ICS:

77.150.30

Bakreni izdelki

Copper products

SIST EN 12167:2024

en,fr,de

EUROPEAN STANDARD

EN 12167

NORME EUROPÉENNE

EUROPÄISCHE NORM

October 2024

ICS 77.150.30

Supersedes EN 12167:2016

English Version

Copper and copper alloys - Profiles and bars for general purposes

Cuivre et alliages de cuivre - Profilés et barres pour usages généraux

Kupfer und Kupferlegierungen - Profile und Rechteckstangen zur allgemeinen Verwendung

This European Standard was approved by CEN on 30 June 2024.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.

[SIST EN 12167:2024](https://standards.iteh.ai/catalog/standards/sist/95ab4aa8-21a2-4727-88e2-57f1d50f2408/sist-en-12167-2024)

<https://standards.iteh.ai/catalog/standards/sist/95ab4aa8-21a2-4727-88e2-57f1d50f2408/sist-en-12167-2024>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents	Page
European foreword.....	4
Introduction	6
1 Scope	7
2 Normative references.....	7
3 Terms and definitions	8
4 Designations.....	8
4.1 Material.....	8
4.1.1 General.....	8
4.1.2 Symbol.....	8
4.1.3 Number	8
4.2 Material condition	8
4.3 Product.....	9
5 Ordering information	11
6 Requirements.....	12
6.1 Composition	12
6.2 Mechanical properties.....	12
6.2.1 Profiles.....	12
6.2.2 Bar	13
6.3 Resistance to dezincification	13
6.4 Residual stress level.....	13
6.5 Dimensions and tolerances	13
6.5.1 Cross-sectional dimensions.....	13
6.5.2 Length.....	13
6.5.3 Flatness.....	14
6.5.4 Straightness.....	14
6.5.5 Twist	15
6.5.6 Corner radii of bar	16
6.6 Surface quality.....	16
6.7 Internal inclusion.....	16
7 Sampling.....	16
7.1 General.....	16
7.2 Analysis.....	16
7.3 Tensile and hardness tests	16
7.4 Dezincification resistance and stress corrosion resistance tests.....	17
8 Test methods	17
8.1 Analysis.....	17
8.2 Tensile test	17
8.2.1 General.....	17
8.2.2 Location of test pieces	17
8.2.3 Shape and size of test pieces	17
8.2.4 Procedure for testing.....	18
8.2.5 Expression of results.....	18
8.3 Hardness test.....	18
8.4 Dezincification resistance test	18
8.5 Stress corrosion resistance test.....	18

8.6	Retests	18
8.6.1	Analysis, tensile, hardness and dezincification resistance tests.....	18
8.6.2	Stress corrosion resistance test	19
8.7	Rounding of results.....	19
9	Certificate of compliance and inspection documentation	19
9.1	Certificate of compliance	19
9.2	Inspection documentation	19
10	Marking, packaging, labelling	19
Annex ZA (informative)	Relationship between this European Standard and the essential requirements of Directive 2014/68/EU (Pressure equipment Directive) aimed to be covered	52
Bibliography		53

iTech Standards
(<https://standards.iteh.ai>)
Document Preview

[SIST EN 12167:2024](https://standards.iteh.ai/catalog/standards/sist/95ab4aa8-21a2-4727-88e2-57f1d50f2408/sist-en-12167-2024)

<https://standards.iteh.ai/catalog/standards/sist/95ab4aa8-21a2-4727-88e2-57f1d50f2408/sist-en-12167-2024>

EN 12167:2024 (E)**European foreword**

This document (EN 12167:2024) has been prepared by Technical Committee CEN/TC 133 “Copper and copper alloys”, the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2025, and conflicting national standards shall be withdrawn at the latest by April 2025.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 12167:2016.

In comparison with EN 12167:2016, the following significant technical changes were made:

- a) Introduction of 6.7 Internal inclusion;
- b) Added a new figure for straightness at 6.5.4.2 and modified values in Table 21;
- c) Introduction in the chemical composition tables of a footnote to explain the meaning of elements for which no upper and lower limits are specified;
- d) CuSi4Zn4MnP (CW245E) and CuSi4Zn9MnP (CW246E) added in the new Table 2 and new Table 10;
- e) Chemical composition of CuZn39Pb3 (CW614N), CuZn40Pb2 (CW617N), CuZn35Pb1,5AlAs (CW625N) and CuZn33Pb1,5AlAs (CW626N) modified in the new Table 7;
- f) Added a new alloy CuZn40Pb1 (CW627N) in the new Table 7 and Table 15;
- g) Chemical composition of CuZn33Pb1AlSiAs (CW725R) modified in the new Table 8;
- h) Added a new alloy CuZn36Si1P (CW726R) in the new Table 8 and Table 16;
- i) Annex ZA added.

This document is one of a series of European Standards for the copper and copper alloy products rod, wire, profile and forgings. Other products are specified as follows:

- EN 12163, *Copper and copper alloys — Rod for general purposes*;
- EN 12164, *Copper and copper alloys — Rod for free machining purposes*;
- EN 12165, *Copper and copper alloys — Wrought and unwrought forging stock*;
- EN 12166, *Copper and copper alloys — Wire for general purposes*;
- EN 12168, *Copper and copper alloys — Hollow rod for free machining purposes*;
- EN 13601, *Copper and copper alloys — Copper rod, bar and wire for general electrical purposes*;
- EN 13602, *Copper and copper alloys — Drawn, round copper wire for the manufacture of electrical conductors*;

— EN 13605, *Copper and copper alloys — Copper profiles and profiled wire for electrical purposes.*

This document has been prepared under a standardization request addressed to CEN by the European Commission. The Standing Committee of the EFTA States subsequently approves these requests for its Member States.

For the relationship with EU Legislation, see informative Annex ZA, which is an integral part of this document.

Any feedback and questions on this document should be directed to the users' national standards body. A complete listing of these bodies can be found on the CEN website.

According to the CEN-CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[SIST EN 12167:2024](https://standards.itih.ai/catalog/standards/sist/95ab4aa8-21a2-4727-88e2-57f1d50f2408/sist-en-12167-2024)

<https://standards.itih.ai/catalog/standards/sist/95ab4aa8-21a2-4727-88e2-57f1d50f2408/sist-en-12167-2024>

Introduction

The European Committee for Standardization (CEN) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent concerning the alloys CuSi4Zn4MnP (CW245E), CuSi4Zn9MnP (CW246E) and CuZn36Si1P (CW726R) given in 6.1.

CEN takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has ensured the CEN that he is willing to negotiate licenses either free of charge or under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with CEN.

— For CuSi4Zn4MnP (CW245E) and CuSi4Zn9MnP (CW246E) information may be obtained from:

Viega Technology GmbH & Co. KG
Viega Platz 1
57439 Attendorn
GERMANY

— For CuZn36Si1P (CW726R) information may be obtained from:

Luvata Oy
Kuparitie 5
28330 Pori
FINLAND

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. CEN shall not be held responsible for identifying any or all such patent rights.

CEN and CENELEC maintain online lists of patents relevant to their standards. Users are encouraged to consult the lists for the most up to date information concerning patents (<https://www.cencenelec.eu/european-standardization/ipr-and-patents/patents/>).

Due to developing legislation, the composition of a material may be restricted to the composition specified in this European Standard with respect to individual uses (e.g. for the use in contact with drinking water in some Member States of the European Union). These individual restrictions are not part of this European Standard. Nevertheless, for materials for which traditional and major uses are affected, these restrictions are indicated. The absence of an indication, however, does not imply that the material can be used in any application without any legal restriction.

1 Scope

This document specifies the composition, property requirements and dimensional tolerances for copper alloy profiles including L-, T-, U-shaped cross-sections, and bars, finally produced by drawing or extruding.

This document applies to profiles with L-, T- and U-shaped cross-sections which would fit within a circumscribing circle of a maximum 180 mm diameter and to bars with thicknesses from 3 mm up to and including 60 mm and with widths from 6 mm up to and including 120 mm.

The sampling procedures, the methods of test for verification of conformity to the requirements of this document, are also specified.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 764-5:2014, *Pressure equipment - Part 5: Inspection documentation of metallic materials and compliance with the material specification*

EN 1173:2008, *Copper and copper alloys - Material condition designation*

EN 1412:2016, *Copper and copper alloys - European numbering system*

EN 10204:2004, *Metallic products - Types of inspection documents*

EN 14977:2006, *Copper and copper alloys - Detection of tensile stress - 5 % ammonia test*

EN ISO 6506-1:2014, *Metallic materials - Brinell hardness test - Part 1: Test method (ISO 6506-1:2014)*

EN ISO 6509-1:2014, *Corrosion of metals and alloys - Determination of dezincification resistance of copper alloys with zinc - Part 1: Test method (ISO 6509-1:2014)*

EN ISO 6892-1:2019, *Metallic materials - Tensile testing - Part 1: Method of test at room temperature (ISO 6892-1:2019)*

ISO 1190-1:1982, *Copper and copper alloys — Code of designation — Part 1: Designation of materials*

ISO 4739:1985, *Wrought copper and copper alloy products — Selection and preparation of specimens and test pieces for mechanical testing*

ISO 6957:1988, *Copper alloys — Ammonia test for stress corrosion resistance*

EN 12167:2024 (E)**3 Terms and definitions**

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 profile

straight product of uniform cross-section along its whole length, in the shape other than rod, hollow rod, bar, tube, sheet or strip

3.2 bar

straight product of uniform rectangular cross-section along its whole length

4 Designations**4.1 Material****4.1.1 General**

The material is designated either by symbol or by number (see Tables 1 to 8).

4.1.2 Symbol

The material symbol designation shall be based on the designation system given in ISO 1190-1:1982.

NOTE Although material symbol designations used in this standard might be the same as those in other standards using the designation system given in ISO 1190-1:1982, the detailed composition requirements are not necessarily the same.

4.1.3 Number

The material number designation shall be in accordance with the system given in EN 1412:2016.

4.2 Material condition

For the purposes of this document, the following designations, which are in accordance with the system given in EN 1173:2008, apply for the material condition:

- | | |
|------------|---|
| M | material condition for the product as manufactured, without specified mechanical properties; |
| R... | material condition designated by the minimum value of tensile strength requirement for the product with mandatory tensile strength requirement; |
| H... | material condition designated by the minimum value of hardness requirement for the product with mandatory hardness requirement; |
| S (suffix) | material condition for a product which is stress relieved. |

Products in the M, R... or H... material condition may be specially processed (i.e. mechanically or thermally stress relieved) in order to lower the residual stress level to improve the resistance to stress corrosion and the dimensional stability on machining [see Clause 5 list entry j), list entry k) and 8.5].

Exact conversion between material conditions designated R... and H... is not possible.

Except when the suffix S is used, material condition is designated by only one of the above designations.

4.3 Product

The product designation provides a standardized pattern of designation from which a rapid and unequivocal description of a product can be conveyed in communication. It provides mutual comprehension at the international level with regard to products which meet the requirements of the relevant European Standard.

The product designation is no substitute for the full content of the standard.

The product designation for products to this standard shall consist of:

- denomination (profile or bar);
- number of this document (EN 12167);
- material designation, either symbol or number (see Tables 1 to 8);
- DW for compliance in the chemical composition according to the 4 MS Common Composition List. This information is mandatory in the case in which the product is used for drinking water applications according to the 4 MS Common Composition List and not to be given in other cases (see Bibliography [4]);
- material condition designation (see Tables 9 to 16);
- for profiles, the number of the profile or a fully dimensioned and toleranced drawing;
- for profiles with L-, T-, U-shaped cross-sections, the nominal cross-sectional dimensions;
- for bar, the nominal cross-sectional dimensions;
- for bar and profiles with L-, T-, U-shaped cross-sections, the tolerance class (see Table 17 to 19);
- for bar, the corner shape (the following designations shall be used as appropriate: SH for sharp, RD for rounded) (see Table 23).

The derivation of a product designation is shown in in the following examples.


EXAMPLE 1 Bar conforming to this standard, in material designated either CuZn40Pb2 or CW617N, for standard applications, in material condition H110, nominal cross-sectional dimensions 30 mm × 10 mm, tolerance Class B, with sharp corners, will be designated as follows:

EN 12167:2024 (E)

Bar EN 12167 — CuZn40Pb2 — H110 — 30 × 10 — B — SH

or

Bar EN 12167 — CW617N — H110 — 30 × 10 — B — SH

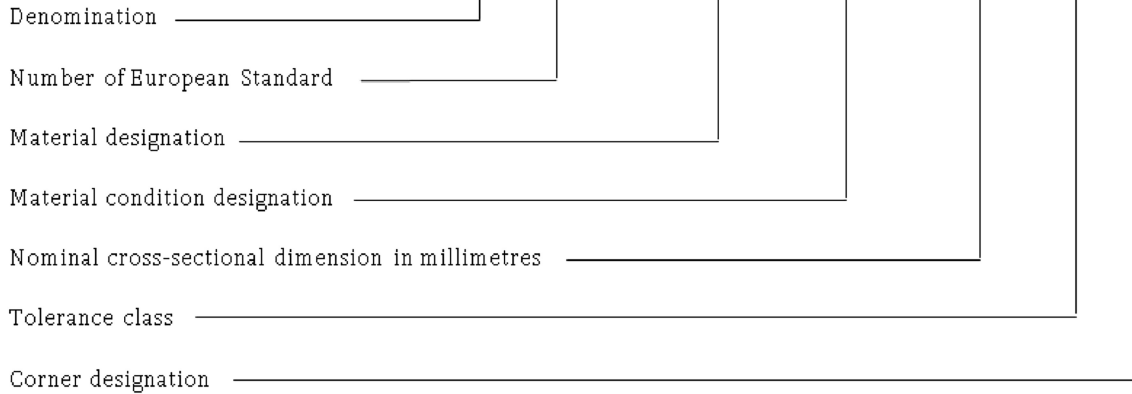


EXAMPLE 2 Bar conforming to this standard, in material designated either CuZn40Pb2 or CW617N for drinking water applications according to the 4 MS Common Composition List, in material condition H110, nominal cross-sectional dimensions 30 mm × 10 mm, tolerance Class B, with sharp corners, will be designated as follows:

Bar EN 12167 — CuZn40Pb2 — DW — H110 — 30 × 10 — B — SH

or

Bar EN 12167 — CW617N — DW — H110 — 30 × 10 — B — SH

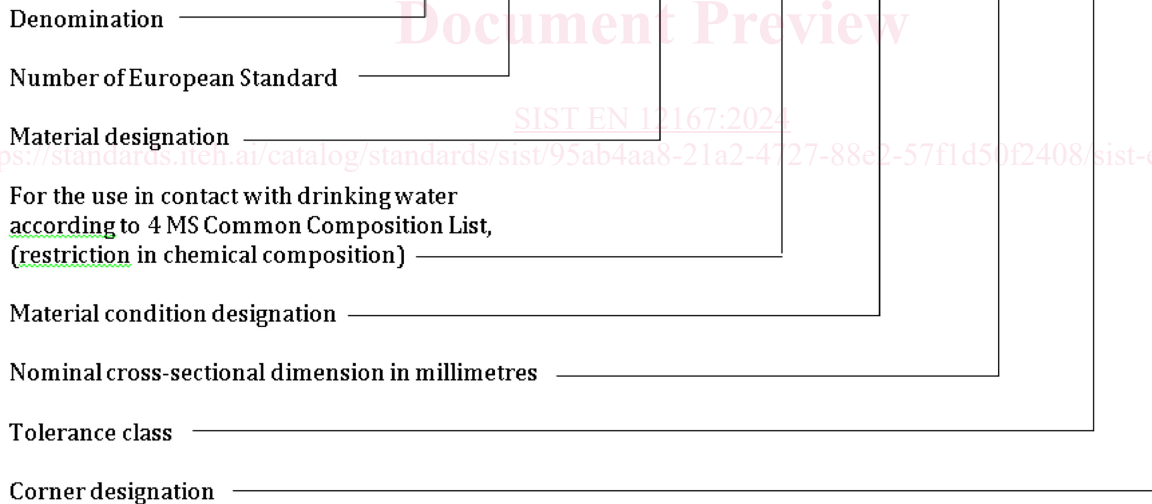

EXAMPLE 3 Profile conforming to this standard, in material designated either CuZn43Pb2Al or CW624N, for standard applications, in material condition M, drawing number S123, will be designated as follows:

Profile EN 12167 — CuZn43Pb2Al — M — S123

or

Profile EN 12167 — CW624N — M — S123

5 Ordering information

In order to facilitate the enquiry, order and confirmation of order procedures the following information shall be specified:

- a) mass of product required;
- b) denomination (profile or bar);
- c) number of this document (EN 12167);
- d) material designation (see Tables 1 to 8);
- e) for bar, the material condition designation (see 4.2 and Tables 9 to 16), if it is other than M;
- f) DW for compliance in the chemical composition according to the 4 MS Common Composition List. This information is mandatory in the case in which the product is used for drinking water applications according to the 4 MS Common Composition List and not to be given in other cases;
- g) size and shape required:
 - 1) for profiles, by fully dimensioned and toleranced drawing, which shall include any specific requirements for straightness and twist and, if appropriate, for flatness;
 - 2) for profiles with L-, T- and U-shaped cross-sections by dimensions and tolerance class (i.e. Class A, B — see Tables 17 and 18), unless the choices of tolerance class are left to the discretion of the supplier;
 - 3) for bar, by dimensions and tolerance class (i.e. Class A, B or C — see Tables 19, 21, 22 and 6.5.3.2), and whether sharp or rounded corners (see Table 23) are required, unless the choices of tolerance class and corner radii are left to the discretion of the supplier;
- h) length of product required:
 - 1) for profiles, the length and the tolerance on length, unless the lengths supplied are left to the discretion of the supplier;
 - 2) for bar, the nominal length (see Table 20).

It is recommended that the product designation, as described in 4.3, is used for items b) to h).

In addition, it shall also state on the enquiry and order any the following, if required:

- i) whether the products according to 6.3, are required to pass a dezincification resistance test (see 8.4);
- j) whether the products are required to pass a stress corrosion resistance test; if so, which test method shall be used (see 8.5) if the choice is not to be left to the discretion of the supplier;
- k) whether the products shall be supplied in a thermally stress relieved material condition;
- l) for profiles, whether any additional properties or requirements, not specified within the standard, are required;

EN 12167:2024 (E)

Details of any mechanical property requirements for profiles, together with the location in the profile from which the test piece should be machined, should be agreed between the involved parties (see 6.2.1).

- m) whether special surface quality is required (see 6.6);
- n) whether a certificate of compliance is required (see 9.1);
- o) whether an inspection document is required, and if so, which type (see 9.2);
- p) whether there are any special requirements for marking, packaging or labelling (see Clause 10).

EXAMPLE 1 Ordering details for 500 kg bar conforming to EN 12167, in material designated either CuZn40Pb2 or CW617N, for drinking water application according to the 4 MS Common Composition List in material condition H110, nominal cross-sectional dimensions 30 mm 10 mm, tolerance Class B, with sharp corners, nominal length 3 000 mm.

500 kg Bar — CuZn40Pb2 — DW — H110 — 30 × 10 — B — SH
EN 12167

— nominal length 3 000 mm

or

500 kg Bar — CW617N — DW — H110 — 30 × 10 — B — SH
EN 12167

— nominal length 3 000 mm

EXAMPLE 2 Ordering details for 1 000 kg profiles conforming to EN 12167, in material designated either CuZn43Pb2Al or CW624N, in material condition M, to drawing number S123, nominal length 3 000 mm.

1 000 kg Profile EN 12167 — CuZn43Pb2Al — M — S123

— nominal length 3 000 mm

[SIST EN 12167:2024](https://standards.itech.ai/catalog/standards/sist/95ab4aa8-21a2-4727-88e2-57f1d50f2408/sist-en-12167-2024)

<https://standards.itech.ai/catalog/standards/sist/95ab4aa8-21a2-4727-88e2-57f1d50f2408/sist-en-12167-2024>

1 000 kg Profile EN 12167 — CW624N — M — S123

— nominal length 3 000 mm

6 Requirements

6.1 Composition

The composition shall conform to the requirements for the appropriate material given in Tables 1 to 8.

Due to developing legislation, specific applications (see 4.3) may require restrictions in the chemical composition. In this case the limitations shall be specified in the ordering information [see Clause 5, list entry f)].

6.2 Mechanical properties

6.2.1 Profiles

Mechanical properties of profiles depend on the shape, dimensions and the material. For this reason, mechanical properties of profiles are not specified in this standard but, if needed, are subject to agreement between the involved parties [see Clause 5, list entry l)].