



SLOVENSKI STANDARD
oSIST prEN 12166:2022
01-oktober-2022

Baker in bakrove zlitine - Žica za splošno uporabo

Copper and copper alloys - Wire for general purposes

Kupfer und Kupferlegierungen - Drähte zur allgemeinen Verwendung

Cuivre et alliages de cuivre - Fils pour usages généraux

Ta slovenski standard je istoveten z: prEN 12166

<https://standards.iteh.ai/catalog/standards/sist/87873b11-e1d4-49b5-9bb0-9dd07cee85d8/osist-pren-12166-2022>

ICS:

77.150.30 Bakreni izdelki Copper products

oSIST prEN 12166:2022

en,fr,de

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 12166

August 2022

ICS 77.150.30

Will supersede EN 12166:2016

English Version

Copper and copper alloys - Wire for general purposes

Cuivre et alliages de cuivre - Fils pour usages généraux

Kupfer und Kupferlegierungen - Drähte zur
allgemeinen Verwendung

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 133.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents	Page
European foreword.....	4
Introduction	6
1 Scope	7
2 Normative references	7
3 Terms and definitions	7
4 Designation.....	8
4.1 Material.....	8
4.1.1 General.....	8
4.1.2 Symbol.....	8
4.1.3 Number	8
4.2 Material condition	8
4.3 Product.....	8
5 Ordering information	10
6 Requirements	12
6.1 Composition	12
6.2 Mechanical properties.....	12
6.3 Grain size.....	12
6.4 Dimensions and tolerances	12
6.4.1 Diameter or width across-flats.....	12
6.4.2 Shape tolerances	12
6.4.3 Corner and edge geometry (wire with square and rectangular cross-section only)..	12
6.5 Joins.....	13
6.6 Surface quality.....	13
6.7 Internal inclusion.....	13
7 Sampling.....	14
7.1 General.....	14
7.2 Analysis.....	14
7.3 Tensile, hardness and grain size tests	14
8 Test methods	14
8.1 Analysis.....	14
8.2 Tensile test	14
8.3 Hardness test.....	15
8.4 Estimation of average grain size.....	15
8.5 Retests.....	15
8.6 Rounding of results	15
9 Declaration of conformity and inspection documentation.....	16
9.1 Declaration of conformity	16
9.2 Inspection documentation.....	16
10 Marking, packaging, labelling.....	16
Annex A (informative) Position of wire cross-section within a coil, reel, spool or drum	35

Annex ZA (informative) Relationship between this European Standard and the essential requirements of Directive 2014/68/EU (Pressure equipment Directive) aimed to be covered.....	37
Bibliography	38

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/87873b11-c1d4-49b5-9bb0-9dd07cee85d8/osist-pren-12166-2022>

European foreword

This document (prEN 12166:2022) has been prepared by Technical Committee CEN/TC 133 “Copper and copper alloys”, the secretariat of which is held by DIN.

This document is currently submitted to the CEN Enquiry.

This document will supersede EN 12166:2016.

In comparison with EN 12166:2016, the following significant technical changes were made:

- a) Modified the definition of diameter or width across-flats at 6.4.1;
- b) Modified 6.4.2 with the introduction of 6.4.2.1 Round wire and 6.4.2.2 Wire with square or regular cross-section;
- c) Introduction in 6.6 of eddy current test parameters;
- d) Introduction of 6.7 Internal inclusion;
- e) CuPb1P (CW113C) added in Table 1 and Table 7;
- f) CuSn5 (CW451K) added in Table 3 and Table 9;
- g) Added a new alloy CuZn36Si1P (CW726R) in Table 6 and Table 12;
- h) Introduction in the chemical composition Tables of a footnote to explain the meaning of elements for which no upper and lower limits are defined;
- i) Chemical composition of CuZn39Pb3 (CW614N) and CuZn40Pb2 (CW617N) modified in Table 5;
- j) Added a new alloy CuZn40Pb1 (CW627N) in Table 5 and Table 11;
- k) Table 19 added;
- l) Annex ZA added.

This document is one of a series of European Standards for the copper and copper alloy products rod, wire, profile and forgings. Other products are specified as follows:

- EN 12163, *Copper and copper alloys — Rod for general purposes*;
- EN 12164, *Copper and copper alloys — Rod for free machining purposes*;
- EN 12165, *Copper and copper alloys — Wrought and unwrought forging stock*;
- EN 12167, *Copper and copper alloys — Profiles and bars for general purposes*;
- EN 12168, *Copper and copper alloys — Hollow rod for free machining purposes*;
- EN 13601, *Copper and copper alloys — Copper rod, bar and wire for general electrical purposes*;
- EN 13602, *Copper and copper alloys — Drawn, round copper wire for the manufacture of electrical conductors*;

— EN 13605, *Copper and copper alloys — Copper profiles and profiled wire for electrical purposes.*

This document has been prepared under a Standardization Request given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s) / Regulation(s).

For relationship with EU Directive(s) / Regulation(s), see informative Annex ZA, which is an integral part of this document.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN 12166:2022](https://standards.iteh.ai/catalog/standards/sist/87873b11-c1d4-49b5-9bb0-9dd07cee85d8/osist-pren-12166-2022)

<https://standards.iteh.ai/catalog/standards/sist/87873b11-c1d4-49b5-9bb0-9dd07cee85d8/osist-pren-12166-2022>

Introduction

The European Committee for Standardization (CEN) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent concerning the alloy CuZn36Si1P (CW726R) given in 6.1.

CEN takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has ensured the CEN that he is willing to negotiate licenses either free of charge or under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with CEN.

Information may be obtained from:

— For CuZn36Si1P (CW726R) information may be obtained from:

Luvata Oy
Kuparitie 5
28330 Pori
FINLAND

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. CEN shall not be held responsible for identifying any or all such patent rights.

CEN and CENELEC maintain online lists of patents relevant to their standards. Users are encouraged to consult the lists for the most up to date information concerning patents (<ftp://ftp.cencenelec.eu/EN/IPR/Patents/IPRdeclaration.pdf>).

Due to developing legislation, the composition of a material may be restricted to the composition specified in this European Standard with respect to individual uses (e.g. for the use in contact with drinking water in some Member States of the European Union). These individual restrictions are not part of this European Standard. Nevertheless, for materials for which traditional and major uses are affected, these restrictions are indicated. The absence of an indication, however, does not imply that the material can be used in any application without any legal restriction.

1 Scope

This document specifies the composition, property requirements and dimensional tolerances for copper alloy wire, finally produced by drawing, rolling or extruding, intended for general purposes, spring and fastener manufacturing applications.

The sampling procedures and the methods of test for verification of conformity to the requirements of this document are also specified.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1173:2008, *Copper and copper alloys - Material condition designation*

EN 1412:2016, *Copper and copper alloys - European numbering system*

EN 10204:2004, *Metallic products - Types of inspection documents*

EN 17263:2019, *Copper and copper alloys - Eddy current testing on the outer surface of rods, bars, hollow rods and wires for the detection of defects by encircling test coil*

EN ISO 2624:1995, *Copper and copper alloys - Estimation of average grain size (ISO 2624:1990)*

EN ISO 6507-1:2018, *Metallic materials - Vickers hardness test - Part 1: Test method (ISO 6507-1:2018)*

EN ISO 6892-1:2019, *Metallic materials - Tensile testing - Part 1: Method of test at room temperature (ISO 6892-1:2019)*

ISO 1190-1:1982, *Copper and copper alloys — Code of designation — Part 1: Designation of materials*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

wire

wound product of uniform cross-section along its whole length

Note 1 to entry: Rectangles may have round or sharp corners.

3.2

deviation from circular form

difference between the maximum and the minimum diameters measured at any one cross-section of a round product

prEN 12166:2022 (E)**4 Designation****4.1 Material****4.1.1 General**

The material is designated either by symbol or by number (see Tables 1 to 6).

4.1.2 Symbol

The material symbol designation is based on the designation system given in ISO 1190-1:1982.

NOTE Although material symbol designations used in this standard might be the same as those in other standards using the designation system given in ISO 1190-1:1982, the detailed composition requirements are not necessarily the same.

4.1.3 Number

The material number designation is in accordance with the system given in EN 1412:2016.

4.2 Material condition

For the purposes of this document, the following designations, which are in accordance with the system given in EN 1173:2008, apply for the material condition:

M	material condition for the product as manufactured, without specified mechanical properties;
R...	material condition designated by the minimum value of tensile strength requirement for the product with mandatory tensile property requirements;
H...	material condition designated by the minimum value of Vickers hardness requirement for the product with mandatory hardness requirements;
S (suffix)	material condition for a product which is stress relieved.
G...	material condition designated by the mid-range value of grain size requirement for the product with mandatory grain size requirements (Table 13).

NOTE The G... material condition is normally applicable only to round wires in the soft material condition made from alloys given in Tables 3, 4 and non-leaded alloys given in Table 2.

Exact conversion between material conditions designated R..., H... and G... is not possible.

Except when the suffix S is used, material condition is designated by only one of the above designations.

4.3 Product

The product designation provides a standardized pattern of designation from which a rapid and unequivocal description of a product can be conveyed in communication. It provides mutual comprehension at the international level with regard to products which meet the requirements of the relevant European Standard.

The product designation is no substitute for the full content of the document.


The product designation for products to this standard shall consist of:

- denomination (Wire);
- number of this document (EN 12166);
- material designation, either symbol or number (see Tables 1 to 6);

- DW for compliance in the chemical composition according to the 4 MS Common Composition List. This information is mandatory in the case in which the product is used for drinking water applications according to the 4 MS Common Composition List and not to be given in other cases;
- material condition designation (see 4.2 and Tables 7 to 13);
- cross-sectional shape (the following designations shall be used as appropriate: RND for round, SQR for square, RCT for rectangular, HEX for hexagonal, OCT for octagonal, PFL for profile);
- nominal cross-sectional dimension(s) (or the number of the profile or a fully dimensioned and toleranced drawing);
- tolerance class for round, square or polygonal wire, (see Tables 14 and 15);
- for square, rectangular or polygonal wire, the corner shape (the following designations shall be used as appropriate: SH for sharp, RD for rounded), (see Table 17).

The derivation of a product designation is shown in the following examples.

EXAMPLE 1 Wire conforming to this document, in material designated either CuZn40Pb2 or CW617N, for standard applications in material condition H115, rectangular, nominal cross-sectional dimensions 6,0 mm × 5,0 mm, with sharp corners, will be designated as follows:

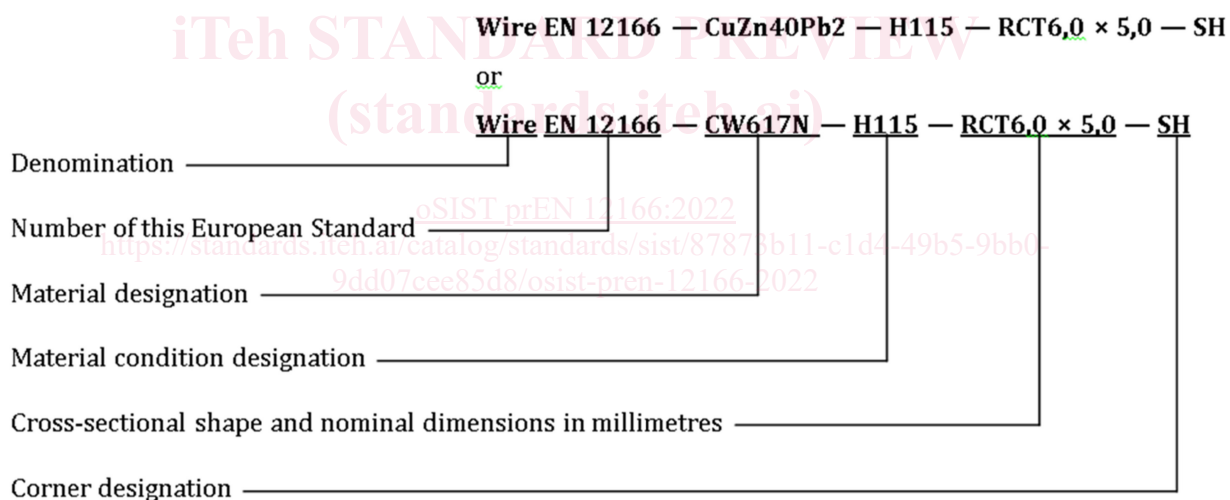


EXAMPLE 2 Wire conforming to this document, in material designated either CuZn40Pb2 or CW617N, for drinking water applications according to the 4 MS Common Composition List, in material condition H115, rectangular, nominal cross-sectional dimensions 6,0 mm × 5,0 mm, with sharp corners, will be designated as follows:

prEN 12166:2022 (E)

Wire EN 12166 — CuZn40Pb2 — DW — H115 — RCT6,0 × 5,0 — SH

or

Wire EN 12166 — CW617N — DW — H115 — RCT6,0 × 5,0 — SH

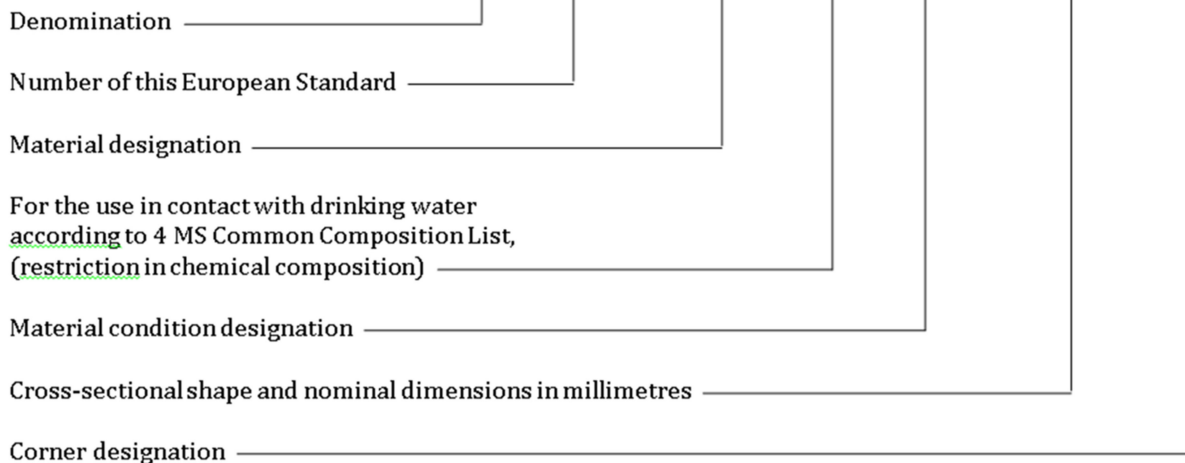

EXAMPLE 3 Wire conforming to this document, in material designated either CuZn39Pb3 or CW614N, for standard applications in material condition R430, round, nominal diameter 6,0 mm, tolerance class B, will be designated as follows:

Wire EN 12166 — CuZn39Pb3 — R430 — RND6,0B

or

Wire EN 12166 — CW614N — R430 — RND6,0B

5 Ordering information

In order to facilitate the enquiry, order and confirmation of order procedures between the purchaser and the supplier, the purchaser shall state on his enquiry and order the following information:

- mass of product required;
- denomination (Wire);
- number of this document (EN 12166);
- material designation (see Tables 1 to 6);
- material condition designation (see 4.2 and Tables 7 to 13) if other than M;
- DW for compliance in the chemical composition according to the 4 MS Common Composition List. This information is mandatory in the case in which the product is used for drinking water applications according to the 4 MS Common Composition List and not to be given in other cases;
- cross-sectional shape;
- nominal cross-sectional dimension(s) (diameter or width across-flats);
- for round, square and regular polygonal wire, the tolerance class required, unless the tolerance class shall be left to the discretion of the supplier (see Tables 14 and 15); for profiles, the tolerances required (or a drawing with dimensions and tolerances);

- j) for square or rectangular wire, whether 'sharp' or 'rounded' corners are required, unless the corner radii shall be left to the discretion of the supplier (see Table 17);

It is recommended that the product designation, as described in 4.3, is used for items b) to j).

In addition, the purchaser shall also state on the enquiry and order any of the following, if required:

- k) for profiles, if the shape is such that the position of the cross-section within the coil, reel, spool or drum is of importance to the purchaser, this should be stated on the drawing (see Annex A for illustration);
- l) for profiles, whether mechanical properties are required; if so, the method of test and the level of properties shall be agreed between the purchaser and the supplier;
- m) whether the products shall be supplied in a thermally stress relieved material condition;
- n) whether special surface quality is required (see 6.6);
- o) whether surface quality test is required (see 6.6) and the class;
- p) whether a declaration of conformity is required (see 9.1);
- q) whether an inspection document is required, and if so, which type (see 9.2);
- r) whether there are any special requirements for marking, labelling or packaging including, if necessary, any limitation on dimensions or mass of coils, spools, reels or drums (see Clause 10).

EXAMPLE 1 Ordering details for 1 000 kg wire for general purposes conforming to EN 12166, in material designated either CuZn39Pb3 or CW614N, in material condition H115, rectangular, nominal cross-sectional dimensions 6,0 mm × 5,0 mm, with sharp corners, in 25 kg coils:

1 000 kg Wire EN 12166 — CuZn39Pb3 — H115 — RCT 6,0 × 5,0 — SH
— 25 kg coils

or

1 000 kg Wire EN 12166 — CW614N — H115 — RCT 6,0 × 5,0 — SH
— 25 kg coils

EXAMPLE 2 Ordering details for 5 000 kg wire for general purposes conforming to EN 12166, in material designated either CuZn40Pb2 or CW617N, for drinking water application according to the 4 MS Common Composition List, in material condition R430, round, nominal diameter 6,0 mm, tolerance class B, on 1 000 kg spools:

5 000 kg Wire EN 12166 — CuZn40Pb2 — DW — R430 — RND6,0B
— 1 000 kg spools

or

5 000 kg Wire EN 12166 — CW617N — DW — R430 — RND6,0B
— 1 000 kg spools