

~~TC/SC~~

~~Date:~~

~~TC/SC~~ ISO/FDIS 19694-3:2022(E)

ISO/TC 146/SC 1

Secretariat: BIS

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 19694-3

<https://standards.iteh.ai/catalog/standards/sist/24452bed-dd97-46d6-b3c3-5c65c3173ce4/iso-19694-3>

Edited DIS -
MUST BE USED
FOR FINAL
DRAFT

Document type:
Document subtype:
Document stage:
Document language:



COPYRIGHT PROTECTED DOCUMENT

**Stationary source emissions — Determination of greenhouse gas emissions in
energy-intensive industries — Part 3: Cement industry**

First edition
Date: 2022-09-22

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 19694-3

<https://standards.iteh.ai/catalog/standards/sist/24452bed-dd97-46d6-b3c3-5c65c3173ce4/iso-19694-3>

Edited DIS -
MUST BE USED
FOR FINAL
DRAFT

Document type:
Document subtype:
Document stage:
Document language:

ISO/FDIS 19694-3:2022(E)

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ~~ISO's~~ISO's member body in the country of the requester.

ISO Copyright Office

~~Ch. de Blandonnet 8 • CP 401 • CH-1214 Vernier, Geneva, Switzerland~~

~~Tel. Phone: + 41 22 749 01 11~~

~~Email: copyright@iso.org~~

~~Website: www.iso.org Fax + 41 22 749 09 47
copyright@iso.org
www.iso.org~~

~~Published in Switzerland.~~

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 19694-3

<https://standards.iteh.ai/catalog/standards/sist/24452bed-dd97-46d6-b3c3-5c65c3173ce4/iso-19694-3>

Contents	Page
Foreword.....	7
Introduction	8
1 Scope.....	1
2 Normative references	1
3 Terms and definitions.....	1
4 Symbols and abbreviated terms	6
5 Determination of GHGs	8
5.1 General.....	8
5.2 Major GHG in cement.....	8
5.3 Determination by stack emission measurements	8
5.4 Determination based on mass balance.....	8
5.5 Gross and net emissions.....	8
5.5.1 General.....	8
5.5.2 Gross emissions	12
5.5.3 Other indirect GHG emission reductions	16
6 GHG Inventory boundaries.....	18
6.1 General.....	18
6.2 Reporting boundaries	18
6.3 Organizational boundaries.....	19
6.3.1 General.....	19
6.3.2 Installations that are covered	19
6.3.3 Operational control and ownership criteria	20
6.3.4 Internal clinker, cement and MIC transfers	21
7 Direct GHG emissions and their determination.....	23
7.1 General.....	23
7.2 CO ₂ from raw material calcinations	25
7.2.1 General.....	25
7.2.2 Input methods (A1) and (A2).....	29
7.2.3 Output methods (B1) and (B2).....	34
7.3 Reporting of CO ₂ emissions from raw material calcination based on clinker output: Summary of IPCC ⁽⁴⁾ and CSI recommendations and default emission factor for clinker....	39
7.4 Determination of the FD calcination rate	41
7.5 Direct determination of the CO ₂ emission factor of FD from analysis of CO ₂ content	42
7.6 Cement specific issues for fuels	43
7.6.1 Conventional fossil fuels	43
7.6.2 Alternative fuels.....	43
7.7 GHG from fuels for kilns	44
7.8 GHG from non-kiln fuels.....	45
7.9 GHG from the combustion of wastewater	46
7.10 Non-CO ₂ GHG emissions from the cement industry	46
8 Indirect GHG emissions and their determination	47
8.1 General.....	47
8.2 CO ₂ from external electricity production	47
8.3 CO ₂ from purchased clinker.....	47
9 Baselines, acquisitions and disinvestments	48

ISO/FDIS 19694-3:2022(E)

10	Reporting.....	49
10.1	General.....	49
10.2	Corporate environmental reporting	49
10.3	Reporting periods.....	50
10.4	Performance indicators.....	50
10.4.1	General.....	50
10.4.2	Denominators	51
11	Uncertainty of GHG inventories	58
11.1	General to uncertainty assessment.....	58
11.1.1	Basic considerations.....	58
11.1.2	Materiality thresholds	59
11.2	Uncertainty of activity data	60
11.2.1	Measuring instruments for the determination of fuel and material quantities.....	60
11.2.2	Aggregated uncertainties in case of mass balances.....	60
11.3	Uncertainties of fuel and material parameters.....	61
11.3.1	Laboratory analyses for the determination of fuel and material parameters.....	61
11.3.2	Uncertainties of total heat consumption and CO ₂ emissions of fuels	61
11.4	Uncertainties of continuous stack emission measurements	62
11.5	Evaluation of the overall uncertainty of a GHG inventory	62
11.6	Application of default values instead of analysing results	62
Annex A (informative)	Findings from the field tests (analytical interferences)	64
Annex B (informative)	Emission factors	69
Annex C (informative)	Uncertainty of activity data.....	73
Annex D (informative)	Overview on terms in a cement plant.....	82
Annex E (informative)	Considerations for applying this document (verification procedure)	87
Bibliography.....		89

<https://standards.iteh.ai/catalog/standards/sist/24452bed-dd97-46d6-b3c3-5c65c3173ce4/iso-19694-3>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 146, *Air quality*, Subcommittee SC 1, *Stationary source emissions*.

A list of all parts in the ISO 19694 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document for the cement industry has been based on the WBCSD/CSI and WRI: "CO₂ and Energy Accounting and Reporting Standard for the Cement Industry".

0.1 Overview of cement manufacturing process


Cement manufacture includes three main process steps (see ~~)-Figure 1):~~

- a) preparing of raw materials and fuels;
- b) producing clinker, an intermediate, through pyro-processing of raw materials;
- c) grinding and blending clinker with other products ("mineral components") to make cement.

There are two main sources of direct CO₂ emissions in the production process: calcination of raw materials in the pyro-processing stage, and combustion of kiln fuels. These two sources are described in more detail below. Other CO₂ sources include direct GHG emissions from non-kiln fuels (e.g. dryers for cement constituents products, room heating, on-site transports and on-site power generation), and indirect GHG emissions from, e.g. for example, external power production and transports. Non-CO₂ greenhouse gases covered by the Kyoto Protocol, apart from carbon monoxide (CO) methane (CH₄) and nitrous oxide (N₂O), are not relevant in the cement context, in the sense that direct GHG emissions of these gases are negligible.



NOTE The non-CO₂ greenhouse gases covered by the Kyoto Protocol are: methane (CH₄), nitrous oxide (N₂O), sulfur hexafluoride (SF₆), partly halogenated fluorohydrocarbons (HFC) and perfluorated hydrocarbons (PFC).

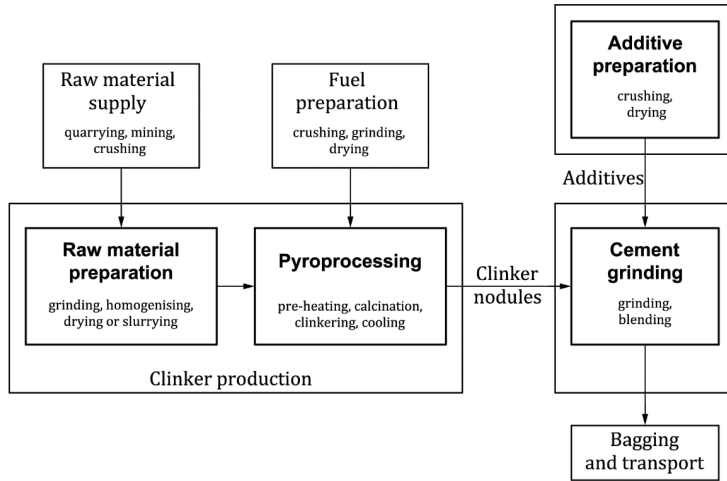

SOURCE: Reference [8], based on Reference [16]. Reproduced with the permission of the authors.

Figure 1— Process steps in cement manufacture (source: [8], based on [16])

Table 1 gives an overview of places where materials enter the cement production process.

ISO 19694-3

<https://standards.iteh.ai/catalog/standards/sist/24452bed-dd97-46d6-b3c3-5c65c3173ce4/iso-19694-3>

Table 1 — Overview of input places of materials

Raw meal	Input place
Raw materials from natural resources	Raw mill
Alternative raw materials	Raw mill
Raw material flows for clinker production	Input place
Raw meal	Kiln feed
Fuel ashes	Burner or precalciner or fuel dryer
Additional raw materials not part of the kiln feed	Kiln inlet
Fuels flows for clinker and cement production	Input place
Fossil fuels	Burner or precalciner or fuel dryer or raw material dryer
Alternative fuels	Burner or precalciner or fuel dryer or raw material dryer
Alternative fossil fuels	Burner or precalciner or fuel dryer or raw material dryer
Mixed fuels	Burner or precalciner or fuel dryer or raw material dryer
Biomass fuels	Burner or precalciner or fuel dryer or raw material dryer
Cement kiln dust	Output place
Dust return	Preheater
Filter dust	Precipitator / filter
By pass dust	Bypass filter
Cement constituents based products	Output place
Clinker	Kiln (cooler)
Cement	Cement mill
Blast furnace slag	Cement mill or grinding station
Fly ash	Cement mill or grinding station
Gypsum	Cement mill or grinding station
Cooler dust	Cooler, is normally added to the clinker flow to the clinker silo
Cement kiln dust	Preheater or precipitator or filter or bypass filter
Limestone	Cement mill or grinding station
Burnt shale	Cement mill or grinding station
Pozzolana	Cement mill or grinding station
Silica fume	Cement mill or grinding station

0.2 CO₂ from calcination of raw materials

In the clinker production process, CO₂ is released due to the chemical decomposition of calcium, magnesium and other carbonates (e.g. from limestone) into lime:



This process is called “calcining” or “calcination”. It results in direct CO₂ emissions through the kiln stack. When considering CO₂ emissions due to calcination, two components may be distinguished:

- CO₂ from raw materials actually used for clinker production, these raw materials are fully calcined in the clinker production process;
- CO₂ from raw materials leaving the kiln system as partly calcined cement kiln dust (CKD), or as normally fully calcined bypass dust.

CO₂ from actual clinker production is proportional to the lime content of the clinker, which in turn varies little in time or between different cement plants.

NOTE A second, but much smaller factor is the CaO and MgO content of the raw materials and additives used.

As a result, the CO₂ emission factor per tonne of clinker is fairly stable with a default value in this standard document of 525 kg CO₂/t clinker (IPCC default: 510 kg CO₂/t clinker, CSI default: 525 kg CO₂/t clinker).⁽¹⁹⁾

The amount of kiln dust leaving the kiln system varies greatly with kiln types and cement quality standards, ranging from practically zero to over one hundred kilograms per tonne of clinker. The associated emissions are likely to be relevant in some countries or installations.

CO₂ emissions from calcination of raw materials may be calculated by two methods which are in principle equivalent: either based on the amount and chemical composition of the products (clinker plus dust leaving the kiln system, output methods B1 and B2), or based on the amount and composition of the raw materials entering the kiln (input methods A1 and A2). See 7.2.1, and 7.2.2 for details.

0.3 CO₂ from organic carbon in raw materials

The raw materials used for clinker production usually contain a small fraction of organic carbon, which may be expressed as total organic carbon (TOC) content. Organic carbon in the raw meal is converted to CO₂ during pyro-processing. The contribution of this component to the overall CO₂ emissions of a cement plant is typically very small (about 1 % or less). The organic carbon contents of raw materials may, however, vary substantially between locations and between the types of materials used. For example, the resulting emissions may be relevant if a cement company organization (used in this standard document) consumes large quantities of certain types of fly ash or shale as raw materials entering the kiln.

0.4 CO₂ from fuels for kiln operation

The cement industry traditionally uses various fossil fuels to operate cement kilns, including coal, petroleum coke, fuel oil, and natural gas. Fuels derived from waste materials have become important substitutes for conventional fossil fuels. These alternative fuels (AF)AFs include fossil fuel-derived fractions such as, e.g. for example, waste oil and plastics, as well as biomass-derived fractions such as waste wood and dewatered sludge from wastewater treatment. Furthermore, fuels are increasingly used which contain both fossil and biogenic carbon (mixed fuels), like e.g. for example, (pre-treated) municipal and (pre-treated) industrial wastes (containing plastics, textiles, paper etc.) or waste tyres (containing natural and synthetic rubber). are increasingly used.

Both traditional fossil and alternative fuels result in direct CO₂ emissions through the kiln stack. However, biomass and bioliquids are considered “climate change-neutral” in accordance with IPCC definitions. The

ISO/FDIS 19694-3:2022(E)

use of alternative (biomass- or fossil-derived) fuels ~~may can~~, in addition, lead to important emission reductions elsewhere, for instance from waste incineration plants or landfills.

Mineral components (~~MIC~~) are natural and artificial materials with latent hydraulic properties. Examples of MIC include natural pozzolana, blast furnace slag, and fly ash. In addition, gypsum is within this ~~standard document~~ labelled as MIC. MICs are added to clinker to produce blended cement. In some instances, pure MICs are directly added to the concrete by the ready-mix or construction company. Use of MICs leads to an equivalent reduction of direct CO₂ emissions associated with clinker production, both from calcination and fuel combustion. Artificial MICs are waste materials from other production processes such as, ~~e.g. for example~~, steel and coal-fired power production. Related GHG emissions are monitored and reported by the corresponding industry sector. Utilization of these MICs for clinker or cement substitution does not entail additional GHG emissions at the production site. Consequently, these indirect GHG emissions are not included in the cement production inventory.

The basic mass balance methods used in this ~~standard document~~ are compatible with the 2006 IPCC Guidelines for National Greenhouse Gas Inventories issued by the Intergovernmental Panel on Climate Change (IPCC) ~~), [4]~~, and with the revised WRI / WBCSD Greenhouse Gas Protocol ~~[9]~~. Default emission factors suggested in these documents are used, except where more recent, industry-specific data has become available.

The 2006 IPCC Guidelines ~~[4]~~ introduced a Tier 3 method for reporting CO₂ emissions from the cement production based on the raw material inputs (~~see~~ Vol. III, Chapter 2.2.1.1, Formula ~~(2.3)~~ ~~[4]~~). However, a large number of raw material inputs and the need to continuously monitor their chemical composition make this approach impractical in many cement plants. The different raw materials are normally homogenized before and during the grinding process in the raw mill. The WRI / WBCSD therefore recommended alternative methods for input-based reporting of CO₂ emissions from raw material calcination in cement plants. They rely on determining the amount of raw meal consumed in the kiln system. In many cement plants, the homogenized mass flow of raw meal is routinely monitored including its chemical analysis for the purpose of process and product quality control. The input methods based on the raw meal consumed are already successfully applied in cement plants in different countries and seem to be more practical than Tier 3 of ~~the 2006 IPCC Guidelines - Reference [4]~~. They were included in the Cement CO₂ and Energy Protocol Version 3 (Simple Input Method A1 and Detailed Input Method A2, 7.2.1) ~~[4]~~. This document provides ~~a~~ guidance ~~on~~ how to compare the GHG performance of other ~~company companies~~ or ~~plant plants~~ within a sector level which is different from a methodology of the IPCC National Inventory Guideline.

~~This document for the cement industry has been based on Reference [1].~~

Stationary source emissions — Determination of greenhouse gas (GHG) emissions in energy-intensive industries — Part 3: Cement industry

1 Scope

This document specifies a harmonized methodology for calculating greenhouse gas (GHG) emissions from the cement industry, with a view to reporting these emissions for various purposes and by different basis, such as, plant basis, company basis (by country or by region) or even international group basis. It addresses all the following direct and indirect sources of GHG included:

— Direct GHG emissions ~~{[ISO 14064-1:2018, 5.2.4, a)]}~~ from sources that are owned or controlled by the organization, such as emissions that result from the following ~~sources~~processes:

~~process:~~ — calcinations of carbonates and combustion of organic carbon contained in raw materials;

— combustion of kiln fuels (fossil kiln fuels, alternative fossil fuels, mixed fuels with biogenic carbon content, biomass and bioliquids) related to either clinker production ~~and~~ or drying of raw materials and fuels, or both;

— combustion of non-kiln fuels (fossil fuels, alternative fossil fuels, mixed fuels with biogenic carbon content, biomass and bioliquids) related to equipment and on-site vehicles, room heating ~~and~~ cooling, drying of MIC (e.g. slag or pozzolana);

— combustion of fuels for on-site power generation;

— combustion of carbon contained in wastewater;

— Indirect GHG emissions ~~{[ISO 14064-1:2018, 5.2.4, b)]}~~ from the generation of purchased electricity consumed in the organization's owned or controlled equipment;

— Other indirect GHG emissions ~~{[ISO 14064-1:2018, 5.2.4, c-) to f)]}~~ from purchased clinker. Excluded from this standard document are all other ISO 14064-1:2018, 5.2.4, c-) to f) emissions from the cement industry.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 12039: ~~2004~~, *Stationary source emissions — Determination of the mass concentration of carbon monoxide, carbon dioxide and oxygen in flue gas — Performance characteristics ~~and calibration~~ of automated measuring systems*

ISO/FDIS 19694-3:2022(E)

ISO 14064-1:2018, ~~Greenhouse gases~~ *Greenhouse gases* — Part 1: Specification with guidance at the organization level for quantification and reporting of greenhouse gas emissions and ~~remarks~~ *removals*

ISO 16911-1:2013, ~~Stationary source emissions~~ — Manual and automatic determination of velocity and volume flow rate in ducts — Part 1: Manual reference method

ISO 16911-2:2013, ~~Stationary source emissions~~ — Manual and automatic determination of velocity and volume flow rate in ducts — Part 2: Automated measuring systems

ISO 19694-1:2021, ~~Stationary source emissions~~ — Determination of greenhouse gas (GHG) emissions in energy-intensive industries — Part 1: General aspects

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 19694-1 and the following apply.

ISO and IEC maintain ~~terminological~~ *terminology* databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

3.1

additional raw material

ADRM

~~additional raw materials are not part of the kiln feed~~ *raw material* (3.23) ~~and are~~ *30* which is fed directly to the calciner or the *kiln inlet* (3.26)

~~Note 1 to entry: Additional raw materials are not part of the kiln feed.~~

ISO 19694-3

<https://standards.iteh.ai/catalog/standards/sist/24452bed-dd97-46d6-b3c3-5c65c3173ce4/iso-19694-3>

3.2

alternative fuels

AF

fuel derived from waste materials, ~~that~~

~~Note 1 to entry: AF~~ can be further ~~divided~~ *divided* into biogenic, *fossil* (3.18) and mixed alternative fuels.

3.3

automated measuring system

~~{AMS}~~

measuring system permanently installed on site for continuous monitoring of emissions

Note 1 to entry: An AMS is a method which is traceable to a reference method.

Note 2 to entry: Apart from the analyser, an AMS includes facilities for taking samples (e.g. sample probe, sample gas lines, filters, flow meters, regulators, delivery pumps, blowers) and for sample conditioning (e.g. dust filter, water vapour removal devices, converters, diluters). This definition also includes testing and adjusting devices that are required for regular functional checks.

Note 3 to entry: In ISO 14064-1:2018, AMS are called “continuous emission monitoring systems (CEMS).”

3.4

alternative fossil fuel

fossil fuel derived from waste materials without biogenic content and not listed by IPCC

**3.5
alternative raw material**

ARM

~~alternative raw materials are raw materials~~ material (3.30) for *clinker* (3.13) production derived from artificial resources

3.6

~~bioliquids~~
bioliquid

liquid fuel for energy purposes other than for transport, including electricity and heating and cooling, produced from biomass

3.7

bypass dust

BPD

discarded dust from the bypass system dedusting unit of suspension preheater, precalciner and grate preheater kilns, normally consisting of *kiln feed* (3.23) material which is fully calcined or at least calcined to a high degree

3.8

cement

building material made by grinding *clinker* (3.13) together with various *mineral components* (3.26) such as gypsum, limestone, blast furnace slag, coal fly ash and natural volcanic material; ~~includes special cements such as the ones based on calcium aluminates~~

Note 1 to entry: This term includes special cements such as the ones based on calcium aluminates

3.9

cement (eq.)equivalent)

calculated cement production value which is determined from *clinker* (3.13) produced on-site in an *integrated cement plant* (3.21) applying the plant-specific clinker/cement-factor

3.10

cement constituent

main and minor additional ~~constituents of materials used in~~ *cement* (3.9) plus calcium sulphates and additives in cement

3.11

cement kiln dust

CKD

~~any~~ discarded dust from dry and wet *kiln system* (3.22) dedusting units, consisting of partly calcined *kiln feed* (3.23) material which includes *bypass dust* (3.7) or any other dust flows coming from the *clinker* (3.13) production

3.12

cement constituents based productsproduct

~~all~~ *clinker* (3.13) produced for *cement* (3.8) making or direct clinker sale, plus *mineral components* (3.26) consumed or processed for sale excluding pre-processed mineral components imported from another cement plant

3.13