

---

---

**Geotechnical investigation and  
testing — Laboratory testing of soil —  
Part 8:  
Unconsolidated undrained triaxial test**

*Reconnaissance et essais géotechniques — Essais de laboratoire sur  
les sols —*

*Partie 8: Essai triaxial non consolidé non drainé*

*iteh Standards*  
*(<https://standards.iteh.ai>)*  
*Document Preview*

ISO 17892-8:2018

<https://standards.iteh.ai/catalog/standards/iso/fbb1d520-75e6-4c70-938c-c85d8d464774/iso-17892-8-2018>



**iTeh Standards**  
**(<https://standards.itih.ai>)**  
**Document Preview**

ISO 17892-8:2018

<https://standards.itih.ai/catalog/standards/iso/fbb1d520-75e6-4c70-938c-c85d8d464774/iso-17892-8-2018>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
[copyright@iso.org](mailto:copyright@iso.org)  
[www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Symbols</b> .....	<b>2</b>
<b>5 Apparatus</b> .....	<b>3</b>
<b>6 Test procedure</b> .....	<b>6</b>
6.1 General requirements and equipment preparation.....	6
6.2 Preparation of specimens.....	6
6.3 Application of cell pressure and initial readings.....	7
6.4 Shearing.....	8
6.5 Dismounting.....	8
<b>7 Test results</b> .....	<b>9</b>
7.1 Bulk density, dry density and water content.....	9
7.2 Stage prior to shearing.....	9
7.3 Shearing.....	9
7.3.1 Corrected cross-sectional area.....	9
7.3.2 Deviator stress.....	9
7.3.3 Vertical strain.....	10
7.3.4 Undrained shear strength.....	10
7.4 Correction for elastic membrane.....	10
<b>8 Test report</b> .....	<b>10</b>
8.1 Mandatory reporting.....	10
8.2 Optional reporting.....	11
<b>Annex A (normative) Calibration, maintenance and checks</b> .....	<b>12</b>
<b>Bibliography</b> .....	<b>14</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by the European Committee for Standardization (CEN) Technical Committee CEN/TC 341, *Geotechnical investigation and testing*, in collaboration with ISO Technical Committee TC 182, *Geotechnics*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This first edition of ISO 17892-8 cancels and replaces ISO/TS 17892-8:2004 and ISO/TS 17892-8:2004/Cor.1:2006.

A list of all the parts in the ISO 17892 series can be found on the ISO website.

## Introduction

This document covers areas in the international field of geotechnical engineering never previously standardized. It is intended that this document presents broad good practice throughout the world and significant differences with national documents is not anticipated. It is based on international practice (see Reference [1]).

**iTeh Standards**  
**(<https://standards.itih.ai>)**  
**Document Preview**

[ISO 17892-8:2018](https://standards.itih.ai/catalog/standards/iso/fbb1d520-75e6-4c70-938c-c85d8d464774/iso-17892-8-2018)

<https://standards.itih.ai/catalog/standards/iso/fbb1d520-75e6-4c70-938c-c85d8d464774/iso-17892-8-2018>



# Geotechnical investigation and testing — Laboratory testing of soil —

## Part 8: Unconsolidated undrained triaxial test

### 1 Scope

This document specifies a method for unconsolidated undrained triaxial compression tests.

This document is applicable to the laboratory determination of undrained triaxial shear strength under compression loading within the scope of geotechnical investigations.

The cylindrical specimen, which can comprise undisturbed, re-compacted, remoulded or reconstituted soil, is subjected to an isotropic stress under undrained conditions and thereafter is sheared under undrained conditions. The test allows the determination of shear strength and stress-strain relationships in terms of total stresses.

Non-standard procedures such as tests with the measurement of pore pressure or tests with filter drains are not covered in this document.

NOTE This document fulfils the requirements of unconsolidated undrained triaxial compression tests for geotechnical investigation and testing in accordance with EN 1997-1 and EN 1997-2.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14688-1, *Geotechnical investigation and testing — Identification and classification of soil — Part 1: Identification and description*

ISO 17892-1, *Geotechnical investigation and testing — Laboratory testing of soil — Part 1: Determination of water content*

ISO 17892-2, *Geotechnical investigation and testing — Laboratory testing of soil — Part 2: Determination of bulk density*

ISO 17892-3, *Geotechnical investigation and testing — Laboratory testing of soil — Part 3: Determination of particle density*

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

### 3.1

#### **cell pressure**

pressure applied to the cell fluid

### 3.2

#### **deviator stress**

difference between the applied vertical total stress and the horizontal total stress at the mid height of the specimen

### 3.3

#### **undrained shear strength**

equal to one half of the deviator stress at failure in the unconsolidated undrained triaxial compression test

### 3.4

#### **failure**

stress or strain condition at which one of the following criteria are met:

- peak deviator stress;
- a specified deformation criterion if a peak deviator stress has not been achieved, e.g., 15 % vertical strain.

## 4 Symbols

$A_i$	initial cross-sectional area of the specimen
$A_{cor}$	cross-sectional area of the specimen during shear
$a$	cross-sectional area of the piston if an external load cell is used
$c_u$	undrained shear strength
$D_m$	initial internal diameter of membrane (before it is placed on the specimen)
$E_m$	elastic modulus for the membrane, measured in tension
$f$	factor relating the vertical strain to the specimen volumetric strain
$H_s$	initial height of the specimen prior to shearing ( $=H_i - \Delta H_i$ )
$H_i$	Initial height of specimen after preparation
$h$	distance from the top of the top cap to the mid height of the specimen
$P$	vertical load reading
$t_m$	initial thickness of the unstressed membrane
$V_i$	initial volume of the specimen after preparation
$W$	gravity force acting on the sum of the deadweight hanger (if used), the piston, the top cap and one half of the soil specimen
$\gamma$	unit weight of the cell fluid
$\Delta H_i$	height change prior to shearing
$\Delta H_s$	height change during shearing



$(\Delta\sigma_v)_m$	correction to vertical total stress due to the membrane
$\varepsilon_v$	vertical strain
$(\varepsilon_v)_m$	vertical strain of the membrane
$\sigma_c$	cell pressure at the mid height of the specimen
$\sigma_h$	horizontal total stress at the mid height of the specimen
$\sigma_v$	vertical total stress at the mid height of the specimen
$\Delta V$	specimen volume change (with reduction in volume being a positive numerical value)

## 5 Apparatus

### 5.1 General


The apparatus shall undergo regular maintenance, checks and calibration as specified in [Annex A](#).

A schematic diagram of a typical apparatus for triaxial compression testing is shown in [Figure 1](#).

iTeh Standards  
(<https://standards.itih.ai>)  
Document Preview

ISO 17892-8:2018

<https://standards.itih.ai/catalog/standards/iso/fbb1d520-75e6-4c70-938c-c85d8d464774/iso-17892-8-2018>

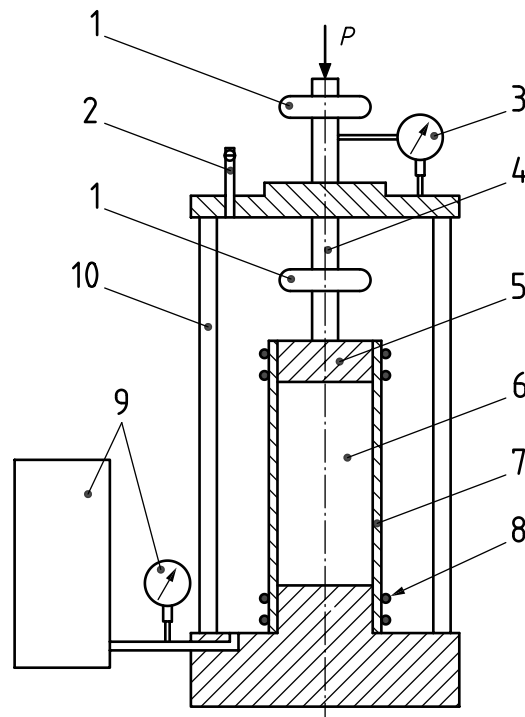

**Key**

- 1 alternative positions for load measuring device
- 2 air bleed
- 3 vertical displacement measuring device
- 4 piston
- 5 top cap
- 6 soil specimen
- 7 rubber membrane
- 8 O-rings
- 9 device for control and measurement of cell pressure
- 10 triaxial cell
- $P$  vertical load

**Figure 1 — Schematic diagram of a typical unconsolidated undrained triaxial apparatus**

## 5.2 Triaxial cell

**5.2.1** The triaxial cell shall be able to withstand the applied cell pressure without leakage of cell fluid out of the cell. Transparent cells should be used where possible.

**5.2.2** The sealing bushing and piston guide shall be designed such that the piston runs smoothly with minimal friction and maintains alignment.

**5.2.3** The material of the top cap and the pedestal and the connection between the top cap and the piston shall be such that their deformations are negligible compared to the deformations of the soil specimen.

**5.2.4** The diameter of the top cap and of the pedestal should normally be equal to the diameter of the specimen. Specimens with diameters smaller than the diameter of the end caps may be tested provided cavities under the membrane at the ends of the specimen can be avoided.