



~~Designation: F 2640-07^{ε1}~~ Designation: F 2640 – 09

Standard Consumer Safety Specification for Booster Seats¹

This standard is issued under the fixed designation F 2640; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

~~^{ε1}Note—The following subsections were corrected editorially in March 2008: 1.2, 5.6, 5.10, 6.4.2, 7.4, 7.5, and 7.7.~~

This standard is issued under the fixed designation F 2640; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

INTRODUCTION

This consumer safety specification addresses incidents associated with booster seats that were identified by the United States Consumer Product Safety Commission (CPSC). CPSC has identified hazards resulting in injuries that occurred when children fell from booster seats, tipped over and out of a booster seat, among other types of incidents. In response to a review of the data received by the CPSC, this specification attempts to minimize the following: incidents related to tray disengagement, restraint disengagement or absence of restraint system, stability of a booster seat while attached to adult chairs and entrapment within a booster seat, in addition to other hazards presented during the use of booster seats. This specification does not cover booster seats that were either blatantly misused or used in a careless manner that disregards the warning statements and safety instructions provided with each booster seat. This specification is written within the current state-of-the-art of booster seat technology. It is intended that this specification will be updated whenever substantive information becomes available that necessitates additional requirements or justifies the revision of the existing requirements.

1. Scope

1.1 This consumer safety specification covers the performance requirements and methods of test to ensure the satisfactory performance of the booster seat.

~~1.2~~ 1.2 This consumer safety specification is intended to minimize injuries to children resulting from normal usage and reasonably foreseeable misuse or abuse of booster seats.

NOTE 1—This consumer safety specification is not intended to address accidents and injuries resulting from the interaction of older children with children in booster seats.

1.3 For purposes of this consumer safety specification, a booster seat is a juvenile chair, which is placed on an adult chair to elevate a child to standard dining table height. The booster seat is made for the purpose of containing a child, up to 5 years of age, and normally for the purposes of feeding or eating. A booster seat may be height adjustable and include a reclined position.

1.4 No booster seat produced after the approval date of this consumer safety specification shall, either by label or other means, indicate compliance with this specification unless it conforms to all requirements contained herein.

~~1.5~~

1.5 The values stated in inch-pound units are to be regarded as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

1.6 The following precautionary caveat pertains only to the test method portion, Section 7, of this specification: *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

¹ This consumer safety specification is under the jurisdiction of ASTM Committee F15 on Consumer Products and is the direct responsibility of Subcommittee F15.16 on Highchairs, Hook-On Chairs and Expandable Gates.

~~Current edition approved Sept. 15, 2007. Published October 2007.~~

Current edition approved July 15, 2009. Published August 2009. Originally approved in 2007. Last previous edition approved in 2007 as F 2640 – 07 ^{ε1}.

2. Referenced Documents

2.1 ASTM Standards:²

D 3359 Test Methods for Measuring Adhesion by Tape Test

F 963 Consumer Safety Specification for Toy Safety

2.2 Federal Regulations:³

16 CFR 1303 Ban of Lead-Containing Paint and Certain Consumer Products Bearing Lead-Containing Paint

16 CFR 1500.48 Technical Requirements for Determining a Sharp Point in Toys or Other Articles Intended for Use by Children Under Eight Years of Age

16 CFR 1500.49 Technical Requirements for Determining a Sharp Metal or Glass Edge in Toys or Other Articles Intended for Use by Children Under Eight Years of Age

16 CFR 1500.50-.52 Test Methods for Simulating Use and Abuse of Toys and Other Articles Intended for Use by Children

16 CFR 1501 Method for Identifying Toys and Other Articles Intended for Use by Children Under Three Years of Age Which Present Choking, Aspiration, or Ingestion Hazards Because of Small Parts

3. Terminology

3.1 Definitions of Terms Specific to This Standard:

3.2 *conspicuous, n*—label which is visible, when the product is in the manufacturer's recommended use position, to a person standing at the sides or front of the booster seat.

3.3 *fabric, n*—any woven, knit, coated, laminated, extruded or calendered flexible material that is intended to be sewn, welded, heat sealed, or glued together as an assembly.

3.4 *manufacturer's recommended use position, n*—any position that is presented as a normal, allowable, or acceptable configuration for the use of the product by the manufacturer in any descriptive or instructional literature.

3.4.1 *Discussion*—This specifically excludes positions that the manufacturer shows in a like manner in its literature to be unacceptable, unsafe, or not recommended.

3.5 *nonpaper label, n*—any label material, such as plastic or metal, which either will not tear without the aid of tools or tears leaving a sharply defined edge.

3.6 *occupant, n*—individual who is in a product that is set up in one of the manufacturer's recommended use positions.

3.7 *paper label, n*—any label material which tears without the aid of tools and leaves a fibrous edge.

3.8 *seam, n*—means of joining fabric components, such as sewing, welding, heat sealing or gluing.

3.9 *static load, n*—vertically downward force applied by a calibrated force gauge or by dead weights.

4. Calibration and Standardization

4.1 All testing shall be conducted on a concrete floor that may be covered with 1/8 in. (3 mm) thick vinyl flooring covering, unless test instructs differently.

4.2 The product shall be completely assembled, unless otherwise noted, in accordance with the manufacturer's instructions.

4.3 No testing shall be conducted within 48 h of manufacturing.

4.4 The product to be tested shall be in a room with ambient temperature of $73 \pm 9^\circ\text{F}$ ($23 \pm 5^\circ\text{C}$) for at least 1 h prior to testing. Testing shall then be conducted within this temperature range.

4.5 All testing required by this specification shall be conducted on the same unit.

5. General Requirements

5.1 There shall be no hazardous sharp points or edges as defined by 16 CFR 1500.48 and 16 CFR 1500.49 before or after testing to this consumer safety specification.

5.2 There shall be no small parts as defined by 16 CFR 1501 before testing or liberated as a result of testing to this specification.

5.3 *Wood Parts*—Prior to testing, any exposed wood parts shall be smooth and free from splinters.

5.4 *Paint*—The paint and surface coating on the product shall comply with 16 CFR 1303.

5.5 *Scissoring, Shearing, and Pinching*—A product, when in a manufacturer's recommended use position, shall be designed and constructed so as to prevent injury to the occupant from any scissoring, shearing, or pinching when members or components rotate about a common axis or fastening point, slide, pivot, fold, or otherwise move relative to one another. Scissoring, shearing, or pinching that may cause injury shall not be permissible when the edges of any rigid parts admit a probe greater than 0.210 in. (5.33 mm) and less than 0.375 in. (9.53 mm) diameter at any accessible point throughout the range of motion of such parts.

5.6 *Openings*—Holes or slots that extend entirely through a wall section of any rigid material less than 0.375-in. (9.53-mm) thick and admit a 0.210-in. (5.33-mm) diameter rod shall also admit a 0.375-in. (9.53-mm) diameter rod. Holes or slots that are

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from U.S. Government Printing Office Superintendent of Documents, 732 N. Capitol St., NW, Mail Stop: SDE, Washington, DC 20401, <http://www.access.gpo.gov>.

between 0.210 in. (5.33 mm) and 0.375 in. (9.53 mm) and have a wall thickness less than 0.375 in. (9.53 mm) but are limited in depth to 0.375 in. (9.53 mm) maximum by another rigid surface shall be permissible (see Fig. 1). The product shall be evaluated in all manufacturer’s recommended use positions.

5.7 *Exposed Coil Springs*—Any exposed coil spring which is accessible to the occupant, having or capable of generating a space between coils of 0.210 in. (5.33 mm) or greater during static load testing in accordance with 6.3 shall be covered or otherwise designed to prevent injury from entrapment.

5.8 *Protective Components*—If a child can grasp components between the thumb and forefinger, or teeth, (such as caps, sleeves, or plugs used for protection from sharp edges, points, or entrapment of fingers or toes), or if there is at least a 0.040 in. (1.00 mm) gap between the component and its adjacent parent component, such component shall not be removed when tested in accordance with 7.1.

5.9 *Labeling*:

5.9.1 Warning labels (whether paper or non paper) shall be permanent when tested in accordance with 7.8.1-7.8.3.

5.9.2 Warning statements applied directly onto the surface of the product by hot stamping, heat transfer, printing, wood burning, etc. shall be permanent when tested in accordance with 7.8.4.

5.9.3 Non-paper labels shall not liberate small parts when tested in accordance with 7.8.5.

5.10 *Toys*—Toy accessories attached to, removable from, or sold with a booster seat, as well as their means of attachment, must meet applicable requirements of Consumer Safety Specification F 963.

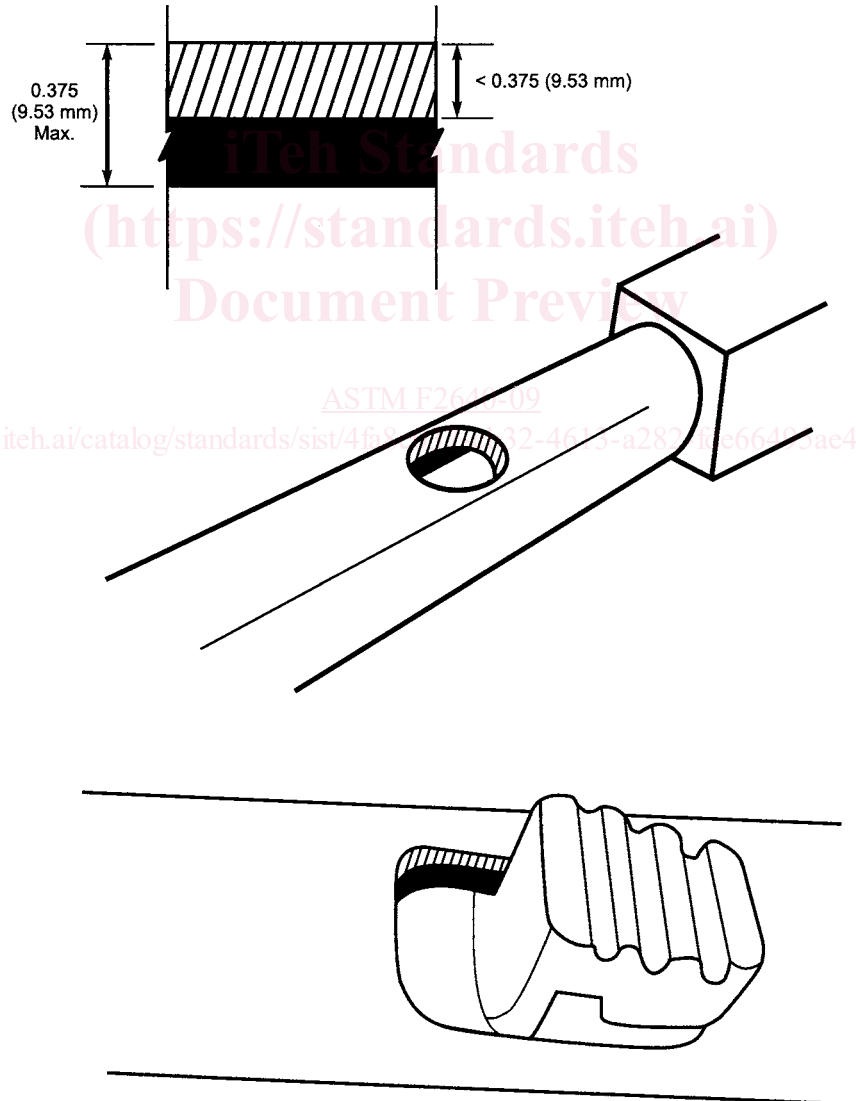


FIG. 1 Openings Examples

6. Performance Requirements

6.1 *Tray Performance (Drop)*—The tray shall remain functional with respect to the booster seat and exhibit no sharp points, sharp edges, or small parts when subjected to a drop test in accordance with 7.2.

6.2 *Tray Performance (Pull)*—The tray shall not become disengaged or dislocated from its original adjustment position, when tested in accordance with 7.3 and 7.4.

6.3 *Static Load*—A booster seat shall support static loads without causing any hazardous conditions as identified within this consumer safety specification. Tests shall be conducted in accordance with 7.5.

6.4 *Child Restraint System:*

6.4.1 Booster seats which are age graded for children less than 36 months shall provide a child restraint system to secure a child in any of the manufacturer's recommended use positions.

6.4.2 The child restraint system shall include both waist and crotch restraint designed such that the use of the crotch restraint is mandatory when the restraint system is in use.



FIG. 2 CAMI Infant Dummy Mark II

6.4.3 The child restraint system and its closing means (for example, buckle) shall not break, separate, or permit removal of the CAMI Infant Dummy Mark II⁴ (see Fig. 2), from the booster seat when tested in accordance with 7.6.

6.4.4 If during test in 7.6.4.1-7.6.5.1 and 7.6.4.2-7.6.5.2, the posterior of the test dummy is pulled past the front edge of the seat, the dummy shall be considered removed.

6.4.5 If during test in 7.6.4.3-7.6.5.3 and 7.6.4.4-7.6.5.4 the dummy with the force applied reaches a vertical position with the bottom of its feet touching or off the seat, the dummy shall be considered removed.

6.4.6 The waist restraint shall be capable of adjustment with a positive, self-locking mechanism that is capable, when locked, of withstanding the forces of tests in 7.6.4-7.6.5 without allowing restraint movement or slippage of more than 1 in. (25.4 mm).

6.4.7 A connecting means and adjustment means for the waist restraint shall be capable of usage independent of one another. The connecting means shall not be an adjustment means but may have one integrally attached to it.

6.4.8 Before shipment, the child restraint system must be attached to the booster seat in such a manner as to not become detached through normal use.

6.5 *Booster Seat Attachment:*

6.5.1 There shall be a means of attaching a booster seat to an adult chair.

6.6 *Structural Integrity:*

6.6.1 During and upon completion of the testing in accordance with 7.7, the booster seat shall comply with all of the following:

6.6.1.1 The booster seat shall not exhibit an instantaneous change in the height of the occupant seating surface above the seating surface of the adult chair of more than 1 in. (25.4 mm) during one cycle of the weight drop. During and after a change in the height of the seating surface, the booster seat must comply with the requirements for openings as defined in 5.6 and scissoring, shearing, and pinching as defined in 5.5.

6.6.1.2 There shall be no breakage of any structural component.

⁴ CAMI Infant Dummy Mark II (shown in Fig. 2) Department of Transportation, Federal Aviation Administration, April 29, 1974, and CAMI Infant Dummy, Drawing No. SA-1001, Memorandum Report AAC-119-74-14, Revision 11, by Richard F. Chandler, July 2, 1994.

6.6.1.3 Latching or locking devices which prevent folding or adjustment of the booster seat shall remain engaged.

6.6.1.4 The angle of the occupant seating surface relative to the seating surface of the adult chair shall not change more than 10°.

7. Test Methods

7.1 Protective Components:

7.1.1 Test all components in accordance with each of the following methods in the sequence listed.

7.1.2 Secure the booster seat so that it cannot move during the performance of the following tests.

7.1.3 *Torque Test*—Apply a torque of 4 lbf-in. (0.5 N · m) gradually within a period of 5 s in a clockwise direction until a rotation of 180° from the original position has been attained or 4 lbf-in. (0.5 N · m) has been reached. Maintain the torque or maximum rotation for an additional 10 s. Then remove the torque and permit the test components to return to a relaxed condition. Then repeat this procedure in the counter clockwise direction.

7.1.4 Tension Test:

7.1.4.1 Attach a force gauge to the component cap, sleeve or plug by means of any suitable device. For components that cannot reasonably be expected to be grasped between thumb and forefinger, or teeth, on their outer diameter but have a gap of 0.04 in. (1.0 mm) or more between the rear surface of the component and the structural member of the booster seat to which they are attached, a clamp such as shown in Fig. 3 may be a suitable device.

7.1.4.2 Be sure the attachment device does not compress or expand the component to hinder removal of the component.

7.1.4.3 Gradually apply a 15-lbf (67-N) force in the direction that would normally be associated with the removal of the component. Apply the force within 5 s and maintain for an additional 10 s.

7.2 *Tray, Drop Test*—From a height of 36 in. (900 mm) measured from the center point of the tray, drop the tray on vinyl tile over concrete flooring once on each of four different surfaces, one surface of which shall include the attaching mechanism. Do not conduct this test on trays that require a tool to remove tray from booster seat.

NOTE 2—For the purposes of this test only, the center point of the tray coincides with the center of the smallest rectangle that circumscribes the tray in the plane of the tray.

7.3 Tray, Horizontal Force:

7.3.1 If the tray is of a type required to be tested in accordance with 7.2, perform this test on a tray that has been tested in accordance with 7.2.

7.3.2 Horizontal Pull Test (Front and Rear):

7.3.2.1 Secure the booster seat to an adult chair per the manufacturer's instructions. Ensure that all legs of the adult chair have contact with the floor so that the booster seat cannot move in the direction of the force being applied. Attach the tray in any one of the adjustable positions.

7.3.2.2 Attach a test device to the center front or back of the tray in such a manner that the force will be exerted on a pad not exceeding 2 in. (51 mm) in any direction.

7.3.2.3 Gradually apply a horizontal force of 45 lbf (200 N) to the tray within a 5 s period and maintain for an additional 10 s.

15 lb Max TENSION

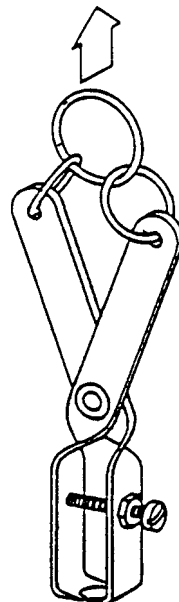


FIG. 3 Tension Test Adapter/Clamp

7.3.2.4 Perform this procedure a total of 5 times in both front and rear directions for all adjustable tray positions.

7.3.3 *Horizontal Pull Test (Sides):*

7.3.3.1 Perform this test under the same conditions as in 7.3.2.1 with the booster seat affixed in a position so that the horizontal force of 45 lbf (200 N) is applied perpendicularly to the center of a side of the tray within 5 s and maintain for 10 s.

7.3.3.2 Perform this procedure a total of 5 times on each side of the tray.

7.4 *Tray, Vertical Pull Test*—Secure the booster seat to an adult chair, per the manufacturer’s instructions, using the attachment means provided with the product. Ensure that all legs of the adult chair have contact with the floor so that the booster seat cannot move in the direction of the force being applied. Attach the tray in any one of the adjustable positions.

7.4.1 *Vertical Pull Test (Rear):*

7.4.1.1 Attach a test device to the rear center of the tray in such a manner that the force will be exerted on a pad not exceeding 2 in. (51 mm) in any direction.

7.4.1.2 Gradually apply a vertically upward force of 45 lbf (200 N) at the rear of the tray within 5 s and maintain for an additional 10 s.

7.4.1.3 Perform this procedure a total of 5 times.

7.4.2 *Vertical Pull Test (Sides):*

7.4.2.1 Attach a test device to the side of the tray at the center line of the locking mechanism in such a manner that the force will be exerted on a pad not exceeding 2 in. (51 mm) in any direction. The force shall not be applied to the locking mechanism.

7.4.2.2 Gradually apply a vertically upward force of 45 lbf (200 N) at the side of the tray within 5 s and maintain for an additional 10 s.

7.4.2.3 Perform this procedure a total of 5 times on each side of the tray.

7.5 *Static Load Testing:*

7.5.1 *Seat Static Load Test:*

7.5.1.1 Secure the booster seat to an adult chair, per the manufacturer’s instructions, using the attachment means provided with the product. Ensure that all legs of the adult chair have contact with the floor.

7.5.1.2 Place a 6 by 6-in. (150 by 150-mm) wood block on the center of the seat.

7.5.1.3 Gradually apply a static load of 100 lb (45 kg) or 3 times the maximum weight of the child recommended by the manufacturer, whichever is greater, on the wood block for a period of 5 s and maintain for an additional 60 s.

7.5.2 *Tray Static Load Test:*

7.5.2.1 Secure the booster seat to an adult chair, per the manufacturer’s instructions, using the attachment means provided with the product. Ensure that all legs of the adult chair have contact with the floor. If the tray is adjustable, adjust it to the rear position.

7.5.2.2 Place a 3 by 6-in. (75 by 150-mm) wood block at the center top surface of the tray.

7.5.2.3 Gradually apply a static load of 50 lb (22.7 kg) on the wood block for a period of 5 s and maintain for an additional 60 s.

7.6 *Child Restraint System Retention Test:*

7.6.1 Secure the booster seat to an adult chair, per the manufacturer’s instructions, so it cannot move during the performance of the following tests.

7.6.2 Place a CAMI Infant Dummy Mark II in the booster seat seat.

7.6.3 Secure the CAMI Infant Dummy Mark II (see Fig. 2) into the booster seat in accordance with the manufacturer’s instructions.

7.6.3.1 For active restraint systems (intended to exclude passive restraint systems designed such that they do not require adjustment by a caregiver) adjust the waist restraint, using the webbing tension pull device shown in

7.6.2 Place a restraint system test harness (see Fig. 4) on a CAMI Infant Dummy Mark II (see Fig. 2), in accordance with the Department of Transportation specification, position the horizontal belt just below the arms, and adjust the horizontal belt snugly around the torso.

7.6.3 Place a CAMI Infant Dummy Mark II in the booster seat seat.

7.6.4 Secure the CAMI Infant Dummy Mark II into the booster seat in accordance with the manufacturer’s instructions.

7.6.4.1 For active restraint systems (intended to exclude passive restraint systems designed such that they do not require adjustment by a caregiver) adjust the waist restraint, using the webbing tension pull device shown in Fig. 5, so that a force of 2 lbf (9 N) applied to the waist restraint will provide a ¼ in. (6 mm) space between the waist restraint and the CAMI Infant Dummy Mark II.

7.6.4

7.6.5 Perform the following tests without readjusting the restraint system:

7.6.4.1

7.6.5.1 Apply a pull force of 45 lbf (200 N) horizontally on the approximate centerline of either leg of the dummy. Gradually apply the force within 5 s and maintain for an additional 10 s.

7.6.4.2 Perform this procedure a total of 5 times with a maximum interval of 2 s between tests.

7.6.4.3

7.6.5.2 Repeat 7.6.5.1 four additional times, for a total of five force applications, with a maximum interval of 2 s between tests.