
Oprema za plamensko varjenje - Baterije acetilenskih jeklenk za varjenje, rezanje in sorodne postopke - Varnostne zahteve za visokotlačne naprave (ISO/DIS 15615:2020)

Gas welding equipment - Acetylene manifold systems for welding, cutting and allied processes - Safety requirements in high-pressure devices (ISO/DIS 15615:2020)

Gasschweißgeräte - Acetylenflaschen-Batterieanlagen für Schweißen, Schneiden und verwandte Prozesse - Sicherheitsanforderungen für Hochdruckeinrichtungen (ISO/DIS 15615:2020)

Matériel de soudage aux gaz - Centrales de détente pour la distribution d'acétylène pour le soudage, le coupage et les techniques connexes - Exigences de sécurité pour les dispositifs haute pression (ISO/DIS 15615:2020)

Ta slovenski standard je istoveten z: prEN ISO 15615

ICS:

25.160.30 Varilna oprema Welding equipment

oSIST prEN ISO 15615:2020 en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[oSIST prEN ISO 15615:2020](#)

<https://standards.iteh.ai/catalog/standards/sist/bf7ee1ef-1775-4926-9a82-bc3c9f36e05b/osist-pren-iso-15615-2020>

DRAFT INTERNATIONAL STANDARD

ISO/DIS 15615

ISO/TC 44/SC 8

Secretariat: DIN

Voting begins on:
2020-03-10Voting terminates on:
2020-06-02

Gas welding equipment — Acetylene manifold systems for welding, cutting and allied processes — Safety requirements in high-pressure devices

Matériel de soudage aux gaz — Centrales de détente pour la distribution d'acétylène pour le soudage, le coupage et les techniques connexes — Exigences de sécurité pour les dispositifs haute pression

ICS: 25.160.30

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 15615:2020](https://standards.iteh.ai/catalog/standards/sist/bf7ee1ef-1775-4926-9a82-bc3c9f36e05b/osist-pren-iso-15615-2020)<https://standards.iteh.ai/catalog/standards/sist/bf7ee1ef-1775-4926-9a82-bc3c9f36e05b/osist-pren-iso-15615-2020>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.

ISO/CEN PARALLEL PROCESSING



Reference number
ISO/DIS 15615:2020(E)

© ISO 2020

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 15615:2020
https://standards.iteh.ai/catalog/standards/sist/bf7ee1ef-1775-4926-9a82-
bc3c9f36e05b/osist-pren-iso-15615-2020](https://standards.iteh.ai/catalog/standards/sist/bf7ee1ef-1775-4926-9a82-bc3c9f36e05b/osist-pren-iso-15615-2020)



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Design	2
5 Requirements	2
5.1 General.....	2
5.2 General requirements.....	2
5.2.1 Materials.....	2
5.2.2 External gas tightness.....	2
5.2.3 Internal gas tightness.....	2
5.2.4 Internal gas tightness after decomposition test.....	3
5.2.5 Pressure resistance.....	3
5.2.6 Acetylene decomposition.....	3
5.3 Additional requirements to be met by specific types of device.....	3
5.3.1 Non-return valve.....	3
5.3.2 Automatic quick-acting shut-off device.....	3
5.3.3 Remotely actuated shut-off valve.....	3
5.3.4 Automatic pressure-actuated shut-off valve.....	3
5.3.5 Three-way valve.....	4
5.3.6 Stop valve.....	4
6 Type tests	4
6.1 General.....	4
6.2 Reference values and accuracy of instruments.....	4
6.3 Test gases.....	4
6.4 Acetylene decomposition test.....	4
6.4.1 General.....	4
6.4.2 Test conditions.....	5
6.4.3 Test procedure and test precautions.....	6
6.5 Pressure resistance test.....	6
6.6 Non-return valve test.....	6
6.6.1 General.....	6
6.6.2 Reverse flow test.....	7
6.6.3 Fatigue test.....	7
6.7 Endurance test.....	8
6.8 Trip pressure test for automatic pressure-actuated shut-off valves.....	8
6.8.1 Equipment.....	8
6.8.2 Test procedure.....	9
6.9 Internal gas leakage test.....	9
6.10 External gas tightness.....	9
7 Manufacturer's instructions	9
8 Marking	10
Annex A (normative) Summary of tests	11
Bibliography	18

ISO/DIS 15615:2020(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15615 was prepared by Technical Committee ISO/TC 44, *Welding and allied processes*, Subcommittee SC 8, *Equipment for gas welding, cutting and allied processes*.

This second edition cancels and replaces the first edition (ISO 15615:2002), which has been technically revised.

iTeh STANDARD PREVIEW

The main changes compared to the previous edition are as follows:

(standards.iteh.ai)

- The manual quick-acting shut-off valve was deleted throughout the document because it is no longer state of the art;
- In Clause 6.3.4 a minimum value for vacuum was added;
- In [Clause 6.6.3](#) a minimum settling time of pressure was added;
- [Clause 6.10](#) was added;

Requests for official interpretations of any aspect of this International Standard should be directed to the Secretariat of ISO/TC 44/SC 8 via your national standards body. A complete listing of these bodies can be found at www.iso.org.

Gas welding equipment — Acetylene manifold systems for welding, cutting and allied processes — Safety requirements in high-pressure devices

1 Scope

This International Standard establishes the general specifications, requirements and tests for devices located on the high-pressure side of acetylene manifold systems as defined in ISO 14114. It does not cover the high-pressure piping, flexible hoses and the regulator.

NOTE The terms “upstream” and “downstream” refer to the normal direction of gas flow in the device.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9090, *Gas tightness of equipment for gas welding and allied processes*

ISO 9539, *Gas welding equipment — Materials for equipment used in gas welding, cutting and allied processes*

ISO 10297, *Gas cylinders — Cylinder valves — Specification and type testing*

<https://standards.iteh.ai/catalog/standards/sist/bf7ee1ef-1775-4926-9a82-bc3c9f36e05b/osist-pren-iso-15615-2020>

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

non-return valve

device which prevents passage of gas in the direction opposite to flow

[SOURCE: ISO 15296:2004]

3.2

automatic quick-acting shut-off device

self-acting device which closes quickly, e.g. when triggered by an acetylene explosion in the high-pressure manifold pipework

[SOURCE: ISO 15296:2004]

3.3

remotely actuated shut-off valve

quick-acting shut-off valve which quickly stops the gas flow when remotely triggered

3.4

automatic pressure-actuated shut-off valve

device which automatically stops the gas supply to the regulator when the downstream pressure rises above the maximum operating pressure

ISO/DIS 15615:2020(E)

3.5

three-way valve

device which allows gas flow from one side of the high-pressure manifold to enter the regulator while isolating flow from the second side

Note 1 to entry: Its position can be reversed so that gas flows from the second side while the first side is isolated. It prevents simultaneous flow from both sides.

3.6

stop valve

device to prevent, when closed, the flow of gas

3.7

multifunctional safety device

device which incorporates two or more of the safety functions

[SOURCE: ISO 15296:2004]

3.8

pressure gauge

device which shows the actual pressure of the assembly (digital or analogue readouts) (e.g. used in the high-pressure line of manifold systems or in pressure regulators for manifold systems.)

4 Design

Components within the devices should be designed to remain at the same electrostatic potential as the body of the device during operation. All metal components in contact with gas should be electrically continuous to prevent static electricity discharges.

5 Requirements

oSIST prEN ISO 15615:2020
<https://standards.iteh.ai/catalog/standards/sist/bf7ee1ef-1775-4926-9a82-bc3c9f36e05b/osist-pren-iso-15615-2020>

5.1 General

The general requirements (see [5.2](#)) apply to all the devices defined in [Clause 3](#). The multifunctional safety devices shall meet the general and additional requirements corresponding to each function.

5.2 General requirements

5.2.1 Materials

Materials used for devices shall be in accordance with ISO 9539.

5.2.2 External gas tightness

The general requirements on external gas tightness shall be in accordance with ISO 9090 at all times, before and after the tests.

5.2.3 Internal gas tightness

Where internal gas tightness is required in this International Standard, the leakage rate shall not exceed 50 cm³/h for devices with a connection internal bore (diameter) less than 11 mm, or less than 0,41d² for larger diameters. See [6.9](#) for test details.

NOTE The expression 0,41d² gives the value of the flow in cm³/h when *d* is the internal bore (diameter), in mm, of the largest connection in the device.

5.2.4 Internal gas tightness after decomposition test

Where internal gas tightness is required after acetylene decomposition, the leakage rate shall not exceed 50 l/h. See [6.9](#) for test details.

5.2.5 Pressure resistance

The housings of the devices shall withstand a pressure of 31,5 MPa (315 bar) for 5 min without any observed leakage. After pressurization, there shall be no visible permanent deformation. See [6.5](#) for test details.

5.2.6 Acetylene decomposition

After the device has been tested with decomposition at 2,5 MPa initial pressure in accordance with [6.4](#), there shall be no visible permanent deformation of the device. No escape of gas shall occur during the test. Destruction of inner parts is permitted.

5.3 Additional requirements to be met by specific types of device

5.3.1 Non-return valve

Non-return valves shall not allow the reverse flow of gas greater than 150 cm³/h (0,15 l/h) when tested in accordance with [6.6.1](#) and [6.6.2](#), both before and after the 2 000-cycle fatigue test (see [6.6.3](#)).

This requirement does not apply to the non-return valve after it has been subjected to the acetylene decomposition test.

5.3.2 Automatic quick-acting shut-off device

Automatic quick-acting shut-off devices shall be triggered by an acetylene decomposition at 0,6 MPa (6 bar) and 2,5 MPa (25 bar). After tripping by acetylene decomposition, the internal gas leakage shall meet the requirements of [5.2.4](#).

5.3.3 Remotely actuated shut-off valve

Remotely actuated shut-off valves shall be triggered by an acetylene decomposition at 0,6 MPa (6 bar) and 2,5 MPa (25 bar). Remotely actuated shut-off valves shall meet the requirements of [5.2.3](#) before the decomposition test (see [6.4](#)) and after the endurance test. See [6.7](#) for endurance test details.

5.3.4 Automatic pressure-actuated shut-off valve

Automatic pressure-actuated shut-off valves shall be triggered (stop gas flow on high-pressure side) at a pressure on the low-pressure signal port between 0,16 MPa and 0,20 MPa (1,6 bar and 2,0 bar) at both 0,1 MPa and 2,5 MPa (1 bar and 25 bar) on the high-pressure side. When triggered, the internal gas leakage shall meet the requirements of [5.2.3](#). See [6.8.2.1](#) (test 1) and [6.8.2.2](#) (test 2) for details.

The valve shall not be triggered when a pressure of 0,145 MPa to 0,150 MPa (1,45 bar to 1,50 bar) is held on the low-pressure signal port for 168 h. See [6.8.2.3](#) (test 3) for details.

Once actuated (closed), it shall not be possible for the valve to reset to an open condition without manual intervention.

In addition to the 31,5 MPa (315 bar) pressure resistance test on high-pressure chambers in [5.2.5](#), the internal chambers of the low-pressure signal port shall withstand a pressure of 6,0 MPa (60 bar) for 5 min. During pressurization, there shall be no visible permanent deformation or leakage to the atmosphere.

ISO/DIS 15615:2020(E)

Automatic pressure shut-off valves shall meet the requirements of [5.2.3](#) before the decomposition test (see [6.4](#)) and after the endurance test (see [6.7](#)). During the decomposition test, the automatic pressure shut-off valve shall not burst. No parts shall be ejected.

5.3.5 Three-way valve

Three-way valves, when closed, shall meet the requirements of [5.2.3](#) before the decomposition test (see [6.4](#)) and after the endurance test (see [6.7](#)).

During the acetylene decomposition test, the three-way valve shall prevent the decomposition passing downstream of the valve.

For valves with handwheels, the closing torque applied for the decomposition test shall be the endurance test torque as defined in the endurance test for cylinder valves in ISO 10297.

5.3.6 Stop valve

The decomposition test shall be carried out with the valve in the closed position. In this position, stop valves shall meet the requirements of [5.2.3](#) before the decomposition test (see [6.4](#)) and after the endurance test (see [6.7](#)).

During the acetylene decomposition test, the stop valve shall prevent the decomposition passing downstream of the valve.

For valves with handwheels, the closing torque applied for the decomposition test shall be the endurance test torque as defined in the endurance test for cylinder valves in ISO 10297.

STANDARD PREVIEW
(standards.iteh.ai)

6 Type tests

oSIST prEN ISO 15615:2020

6.1 General

<https://standards.iteh.ai/catalog/standards/sist/bf7ee1ef-1775-4926-9a82-bc3c9f36e05b/osist-pren-iso-15615-2020>

The type test methods of [Clause 6](#) shall be applied to sample devices to be tested for compliance with this International Standard. Tests shall be carried out on new devices. Information on the number of samples are given in Table A.1.

6.2 Reference values and accuracy of instruments

The accuracy of the pressure measuring instrument shall be within $\pm 3\%$ of the measured value. For this purpose, the maximum measuring range (full scale) and class of the pressure measuring instrument to be used shall be selected appropriately.

All pressures shall be given in megapascals MPa and in bars (bar). If the temperature at the test assembly is outside the range of $20 \pm 5\text{ }^\circ\text{C}$, the pressure shall be corrected in accordance with the ideal gas law. Consequently, the test shall be carried out at low temperatures with a lower initial pressure and at high temperatures with a higher initial pressure. The minimum temperature shall be $5\text{ }^\circ\text{C}$.

6.3 Test gases

The decomposition test shall be carried out with an acetylene supply source of purity of at least 99,5 %. All other tests shall be carried out with oil-free nitrogen or air.

6.4 Acetylene decomposition test

6.4.1 General

The test shall be carried out on three samples. The device shall be installed in the test equipment so the decomposition is initiated on the upstream side.

The device described in 3.1 shall be tested in the normal direction of gas flow. Devices described in 3.2, 3.3, 3.4 and 3.5 shall be tested in the open position. Devices described in 3.6 and 3.7 shall be tested in the closed position. The shut-off valves described in 3.2, 3.3, 3.4 and 3.5 are normally in the open position and intended to work in the event of an emergency.


The test conditions for all types of device and the number of samples to be tested are listed in Annex A.

6.4.2 Test conditions

The devices shall be checked using a test set-up as shown in Figure 1 and Figure 2:

- ignition tube length (l_1): 5 m;
- tube length (l_2): 1 m;
- for samples with an outlet bore up to 10 mm: the internal diameters of the tubes, d_i , shall be 10 mm;
- for samples with an outlet bore larger than 10 mm: d_i shall be equal to the nominal outlet bore;
- industrial acetylene, static gas phase;
- ignition by fusible metal wire, ignition energy less than 100 J.

When testing pressure gauges (3.9), replace element 5 in Figure 1 with a special T-fitting with an internal diameter of 10 mm and a branch line (internal diameter 5 mm and length 50 mm) and connect the device to the branch line. When testing pressure gauges, the internal diameters of the tubes of length l_1 and l_2 shall be 10 mm.

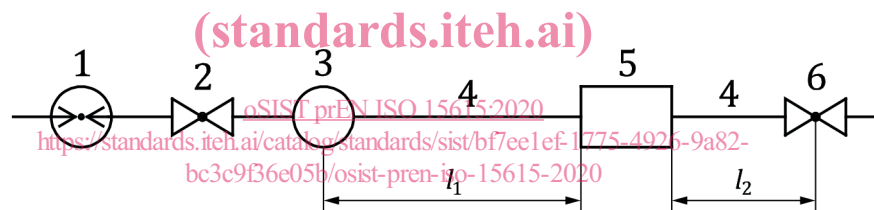

Key

1	pressure-measuring device	4	steel tube
2	inlet valve	5	test sample
3	ignition unit	6	outlet valve
l_1, l_2	tube lengths		

Figure 1 — Acetylene decomposition test set-up